

# metabo®

PROFESSIONAL POWER TOOL SOLUTIONS

## 2020-2021 Power Tools + Accessories



# WHAT YOU EXPECT FROM PROFESSIONAL POWER TOOLS: METABO DELIVERS.




## ULTIMATE PRODUCTIVITY

We know you expect your power tools to deliver high productivity. Our goal is to create system solutions with the highest productivity, saving time and money when pairing our tools and accessories.



## PERFORMANCE

Metabo power tool and accessory systems are designed to exceed expectations: for all your applications, our solutions will perform better than any other system, making sure you get a better job done faster.

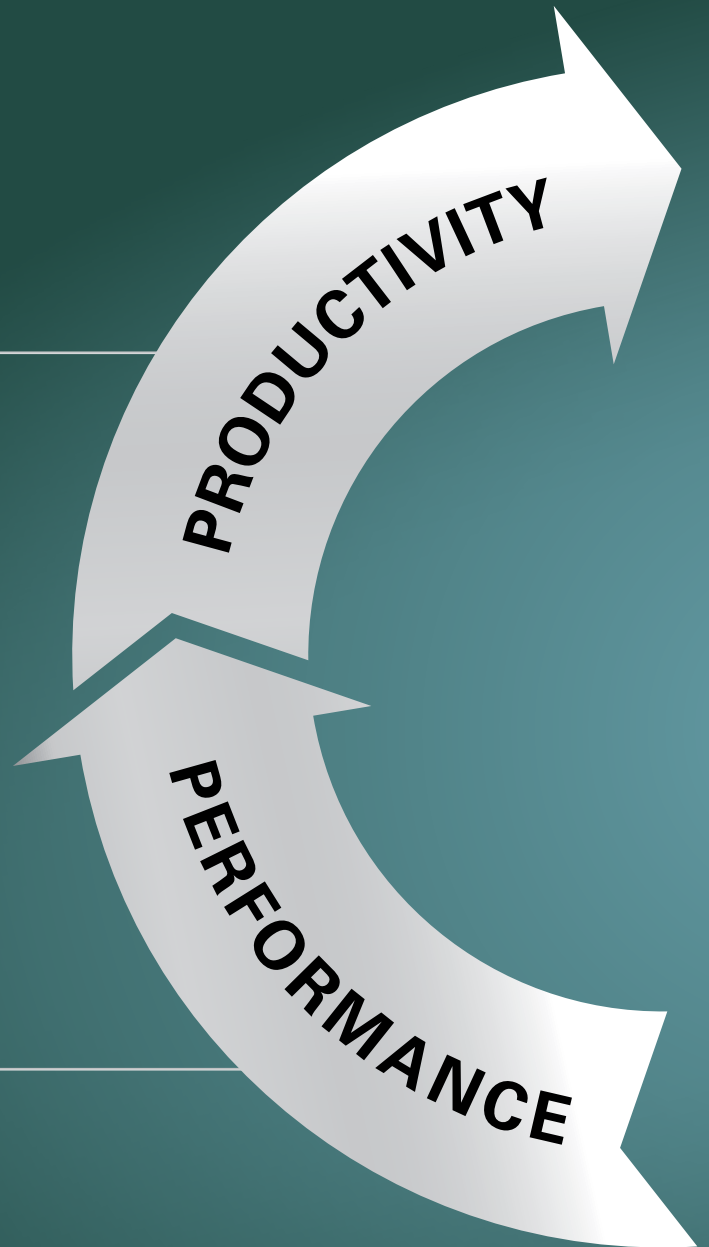

WATCH VIDEO!



#### MAXIMUM SAFETY

Between lost time and injury related cost, safety is of utmost importance for today's professionals. Our products offer utmost safety and protection for the user - with this, we are continuously setting new standards in the market.

Discover more: [metabo.com/safety](https://metabo.com/safety)



#### QUALITY

Perhaps the most vertically integrated power tool manufacturer, Metabo controls the quality of its manufacturing processes with the tightest tolerances. From aluminum die-casting to injection composite molding, we know what drives quality inside a tool. We use the highest quality raw materials to build our motors - you can feel the difference.

# MADE IN GERMANY: INNOVATION IS OUR TRADITION.

MADE IN GERMANY

In every Metabo tool, there is traditional German engineering ingenuity. Since 1924 we have been developing innovative ideas in our Nürtingen plant and have been implementing them into pioneering tools and perfecting accessories for professional users directly on the site. Our service, tailor-made to your requirements, also makes us a strong partner for the industrial sector.



Aluminum foundry



Engineering



Plastic injection molding



Mold construction



Mechanical production



Assembly



Steel parts with  
hardening plant




Motor production

# BOOST PERFORMANCE WITH "THE METABO SYSTEM"

FOR HIGHEST PERFORMANCE, PRODUCTIVITY AND SAFETY:  
PAIR METABO TOOLS AND ACCESSORIES

As a system provider, we pair the performance of our tools with an optimally coordinated range of system accessories and consumables. Only this way will you achieve the productivity, long service life, and reliability that you expect from a Metabo system.

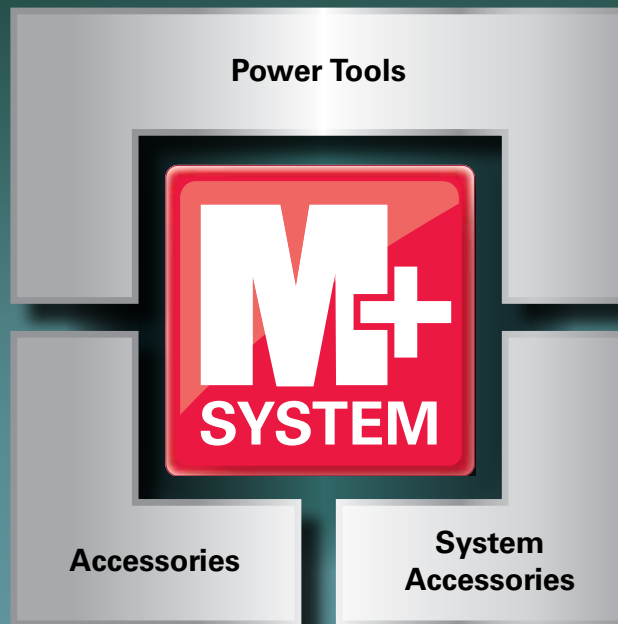

## Everything to complete your job.

We offer a complete range; cutting, grinding and finishing accessories, carbide bits, chucks and many more in reliable Metabo quality.



## Everything that makes your tool even more efficient.

Dust extraction systems, job matched guards, accessory handles for maximum ergonomics and cordless technology that allows you to work anywhere!

## Your benefits

With Metabo accessories and system accessories you can:

- Enjoy the safest systems in the industry
- Optimize the use, performance and efficiency of Metabo tools
- Rely on highest quality, durability and reliability
- Save money: Metabo systems offer the lowest overall cost of operation





## 3-Year Warranty

See page 145 for more information.

## Locate your nearest service center

[metabo.com/us/enus/storefinder](https://metabo.com/us/enus/storefinder)

If you have a particular question about Metabo products or applications, our competent and experienced service staff is at your disposal to provide personal support for your individual requirements. **Call us at 1-800-638-2264 ext. 3.**

## Metabo Max Repair Program

The MMR program guarantees that you will not pay more than the published Max Repair rate for that tool. See page 144 for more information.

## Metabo Factory Service Website

[metabousafactoryservice.com](https://metabousafactoryservice.com)

With our new factory service website, sending your tool for full service and maintenance has never been easier. Go to our website, select your tool from the drop-down menu, process the order, use the supplied shipping label, and we will take care of the rest! See page 144 for more information. **Call us at 1-800-638-2264**

## 8-Year Availability Guarantee on Spare Parts

**8 Year availability guarantee on spare parts.** We realize your tool is important to you, and you want to keep it running as long as possible. When we make changes, you can be sure spare parts will be available for your tool for 8 years after its discontinuation date.

## Parts and Schematics

[metabo-service.com](https://metabo-service.com)

You can find important product information at [www.metabo-service.com](https://www.metabo-service.com) such as spare parts lists, schematics and user manuals.





## Cordless Solutions 10

12V Tools <b>NEW</b>	16
Cordless Fabrication	18
Angle Grinders 4-1/2"-6"	20
Cutting Solutions	21
Die Grinders, Beveling Tool	22
Shearer, Nibbler, Multi-tool & Stainless Steel Tools <b>NEW</b>	23
High Speed Drills, Tapping Tool, Rivet Gun	24
Impact Drivers and Wrenches	25
Drill/Drivers and Hammer Drills <b>NEW</b>	26
Drywall Screwguns, Caulking Guns, Heat Gun, Mixer <b>NEW</b>	28
Rotary Hammers	29
Saws <b>NEW</b>	30
Shop Fan, Blower, Cordless Vacuum, USB Charger	32
Cordless Lights, Laser Distance Meters	33
Cordless Batteries, Chargers	34
Adaptors, Tool Bags, Guide Rail Accessories	35
Jig Saw and Recip. Saw Accessories	36
Screwdriver Bits, Bit Holders, Nutsetters & Bit Sets	38

01



## Angle Grinders 40

Angle Grinders 4 1/2" - 5" <b>NEW</b>	44
Rat Tail Grinders 4 1/2" - 5"	48
Rat Tail Grinders 6" - 7"	49
Angle Grinders 6"	50
Variable Speed Angle Grinders 4 1/2" - 6" <b>NEW</b>	52
Angle Grinder Accessories	53
Angle Grinders 7" - 9" <b>NEW</b>	54
Flat Head Angle Grinders	56
Flat Head Angle Accessories	58

02







## Abrasives 60

Flat Head Angle Grinder Abrasives	58
Cutting Wheels Type 1 & 27	66
Grinding Wheels Type 27	71
Cup Wheels	74
Flap Discs Type 27 & 29	75
Resin Fiber Abrasive Discs	79
Wire Cup Brushes, Wire Wheels, Wire Brushes	81

03



	<p><b>Metal Solutions</b> <b>83</b></p>	<p>04</p>
	<p>Beveling Tools 84</p>	
	<p>Finishing and Dry Polishing Tools 88</p>	
	<p>Shearer and Nibbler 89</p>	
	<p>Multi-tool 90</p>	
	<p>Die Grinders 91</p>	
	<p>Die Grinder Accessories 92</p>	
	<p>Stainless Steel Tools 94</p>	
	<p>Stainless Steel Accessories 99</p>	
	<p>Bench Grinders 106</p>	
	<p>Bench Grinder Abrasives 107</p>	
	<p>Chop Saw 108</p>	
	<p>Drills 109</p>	
	<p>Drill Presses 110</p>	
	<p>Drill Accessories 110</p>	
	<p><b>Concrete &amp; Masonry Solutions</b> <b>112</b></p>	
	<p>Metabo Compliant Systems <b>NEW</b> 114</p>	
	<p>Concrete Grinders and Surface Prep Kits <b>NEW</b> 116</p>	
	<p>Masonry Cutting-Scoring, Wall Chaser <b>NEW</b> 119</p>	
	<p>Dry Polishers and Wet Polisher 59, 120</p>	
	<p>Variable Speed Angle Grinders 4 1/2" - 6" <b>NEW</b> 121</p>	
	<p>Vacuums 122</p>	
	<p>Vacuum Accessories 123</p>	
	<p>SDS-Plus Combination Hammers 124</p>	
	<p>SDS-Max Combination Hammers 126</p>	
	<p>Demolition and Chipping Hammers 128</p>	
	<p>Hammer Drills 129</p>	
	<p>SDS-Max and SDS-Plus Carbide Bits 130</p>	
	<p>Spline and Straight Shank Bits 132</p>	
	<p>Dust Extraction Bits and Chuck Adaptors 133</p>	
	<p>Core Bits and SDS-Max Adaptor, Chisels 134</p>	
	<p><b>Woodworking and Heat Guns</b> <b>136</b></p>	
	<p>Sanders 138</p>	
	<p>Sander Accessories 139</p>	
	<p>Jig Saws, Paint Remover 140</p>	
	<p>Heat Guns 141</p>	
	<p><b>Carrying Cases, Chucks, Service Centers and Warranty Information</b> <b>7, 142</b></p>	<p>06</p>



# AMPLIFIED CORDLESS POWER



## THE MOST ADVANCED 18V BATTERY SYSTEM

**Air-Cooled:** The built-in fan system quickly cools a hot battery pack, reducing the overall charging time while increasing battery life.

**Electronic Single Cell Protection (ESCP):** Each cell evenly charges and discharges, extending the life of the battery, helping protect the motor and extending the life of the tool.


**The Cordless Alliance System (CAS):** A cross-manufacturer battery pack system of leading power tool brands.



**3-Year Unconditional  
Battery Warranty**



01

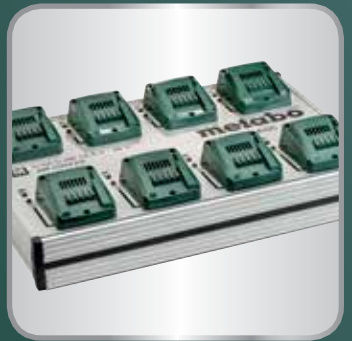


## Cordless Solutions

➤ **Over 90 tools on our cordless lineup, and many more coming!**

➤ **Most complete range of cordless metalworking and industrial tools on the market**

- Powered by the breakthrough LiHD (Lithium High-Density) battery technology, Metabo cordless tools deliver true industrial productivity, replacing the need for cords and hoses
- Metabo offers more specialty metalworking tools than any other tool manufacturer
- Using the most advanced charging system, Metabo batteries charge faster and last longer, making sure you are always ready to work

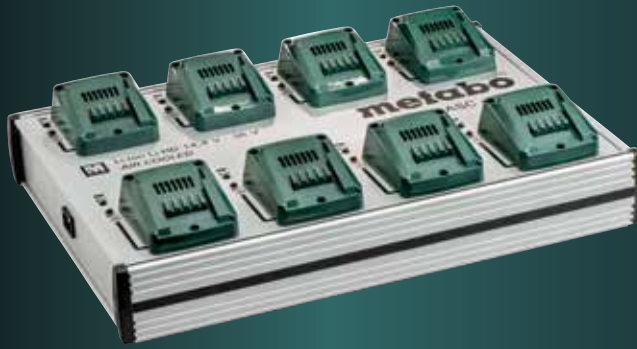

## 3 CLASSES OF POWER 1 CHARGING PLATFORM

**12V**



BS 12 BL Q

**18V**



WPB 18 LTX BL 150

**36V**




WPB 36 LTX BL 230

12V Power Tool Line	16
Assembly Solutions	18
Angle Grinders	20-21
Saws	21 (Metal), 30-31 (Wood)
Welding Prep: Die Grinders and Beveling	22
Stainless Steel and Metal Finishing	23
Rivet Gun, Tapping Tool	24
Impact Drivers, Drill/Drivers	25-27
Drywall Screw Gun, Mixer, Heat Gun	28
Rotary Hammers	29
Shop Fan, Blower, Cordless Vac	32
Lighting Solutions and Measuring Lasers	33
Batteries, Chargers and Accessories	34-39

# Ultra-M: The Most Advanced Battery System



The best metalworking cordless tools deserve the best battery system: Metabo offers a unique set of technologies designed to provide users with the power to tackle the most demanding applications.

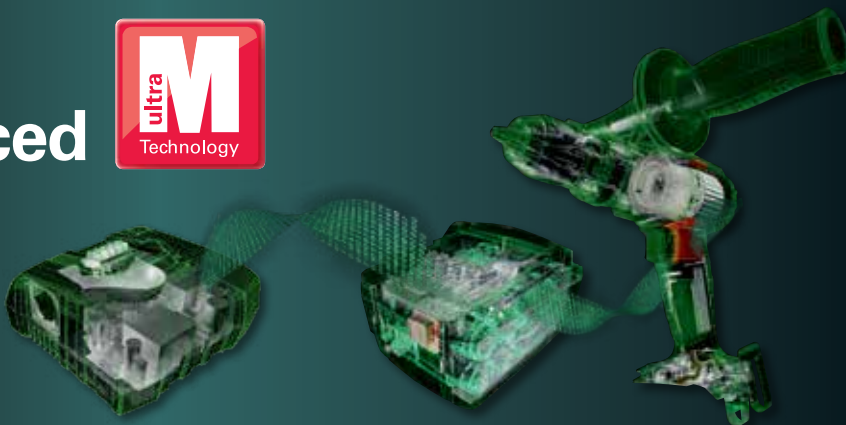

## ➤ 115% More Run Time

The Metabo 8.0 Ah LiHD battery will run up to 115% longer than Metabo's 5.2 Ah Li-ion battery.

## ➤ 3-Year Full Battery Warranty

Please see Service at [www.metabo.com](http://www.metabo.com) for more details.



## ➤ Air Cooled: Ready to use again in no time

The charger's built-in fan system quickly cools a hot battery pack as it begins the charging cycle, reducing overall charging time. The result is a battery that will charge up to 30% faster and increased battery life.

## ➤ Resistance to Extreme Temperatures

A fully charged LiHD battery pack will deliver 100% of its power in temperatures ranging from 5°F to 122°F.

## ➤ Electronic Single Cell Protection (ESCP)

Each individual battery cell is evenly charged and discharged every single time, thus greatly extending the life of the battery. The electronics further protect the motor and switch components against overload / overheat extending the life of the tool in demanding applications.

## ➤ Intelligent Battery

The key behind the system is a microchip in the battery that effectively communicates with the tool and the charger.

## ➤ 100% Compatibility

All Metabo batteries, tools and chargers are compatible.



## ➤ Brushless Motor Technology

(depending on model)

- Longer motor life
- Increased power
- Longer run time
- Less friction
- Less heat build up
- Highest efficiency

Metabo participates in:

For more information  
[call2recycle.org](http://call2recycle.org)



## Cordless Alliance System: One battery, many solutions.



## Metabo - leading the future of cordless freedom - across manufacturers!

The Cordless Alliance System (CAS) is a cross-manufacturer battery pack system of leading power tool brands.

The CAS brings together a variety of professional cordless power tools that perform a wide range of tasks, all using the same battery platform.

For more information please see:  
[www.cordless-alliance-system.com](http://www.cordless-alliance-system.com)




# AMPLIFIED CORDLESS POWER



LEARN MORE!

# 100% MORE POWER\*

## NEW CELL TECHNOLOGY

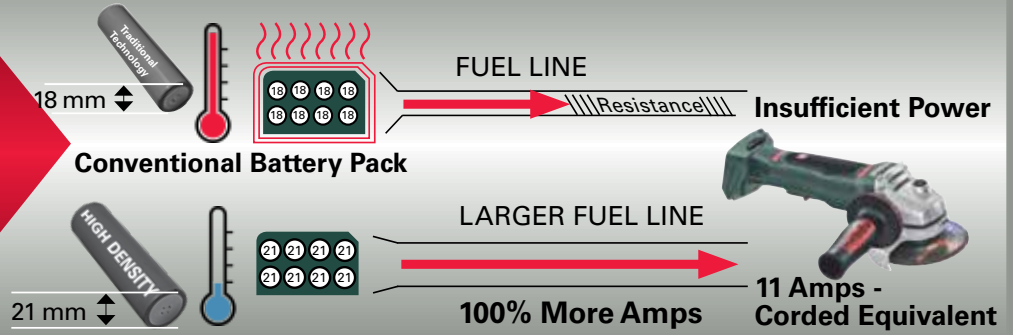

# 115% MORE RUNTIME\*

## NEW BATTERY ARCHITECTURE

Air-Cooled design allows for faster charging cycles

Epoxy sealed electronics

Highest quality copper and nickel plating in connectors



Larger, higher current carrying contacts

More robust silver plated copper power rails

# 90/1

Power Tools Battery pack



# THE ONLY CHOICE FOR CORDLESS METALWORKING!

\* US Industry Standard 5.2 Li-ion


**More robust silver plated copper power rails**



**Revolutionary LiHD high-performance cells**



**LiHD**  
TECHNOLOGY

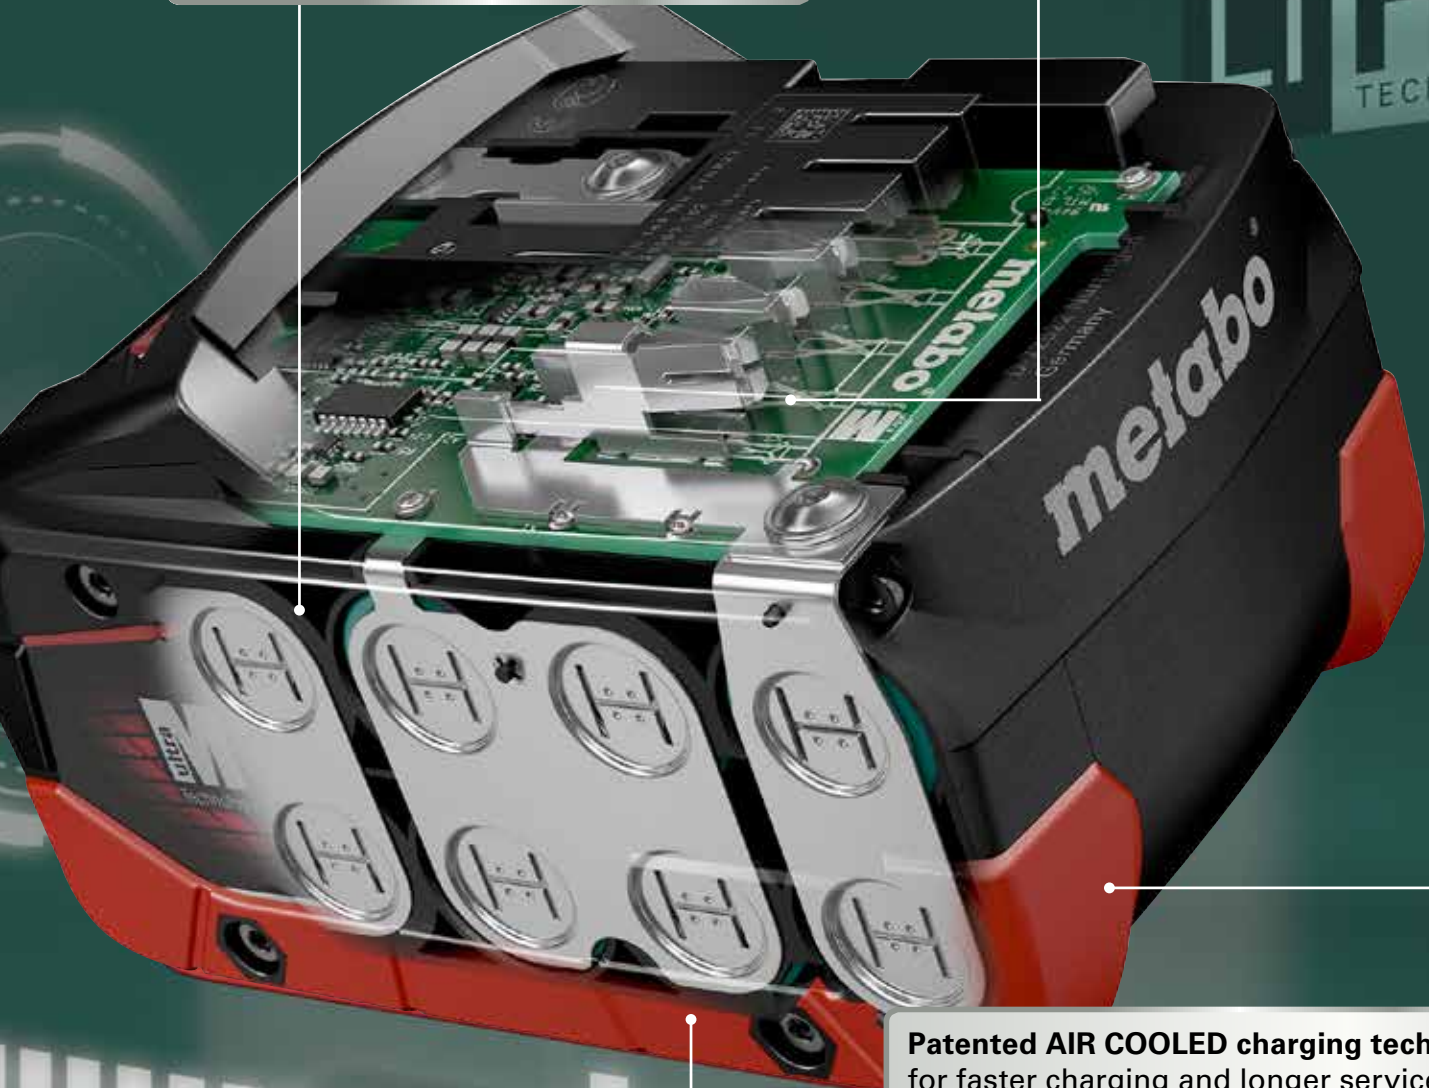

**Patented AIR COOLED charging technology – for faster charging and longer service life.**



**100% compatibility**  
with all current and future  
cordless machines from  
Metabo.

# CORDLESS 12V

## 12V 3/8" Brushless Drill Driver

BS 12 BL Quick

**2**  
SPEED

2-Speed Gearbox for Versatile Use:  
- 1,650 RPM for most common applications  
- 500 RPM for high torque needs

Quick Change Chuck  
with 1/4" hex bit holder



BL Motor  
- Up to 398 in. lbs. torque  
- Longest life and runtime

**BRUSHLESS  
MOTOR**

**SAME CHARGER  
AS 18V & 36V**

Quick Optional Accessories:  
- Right Angle Attachment  
- Lock-on Bit Holder



### Quick Off-set Attachment

627234000 for BS 12 BL Q



### Quick Change Right Angle Drive Adaptor

627261000 for BS 12 BL Q



### 12V LED Flashlight

ULA 12 LED

Bare: 600788000 210 lumen



### USB, Charger and Adaptor

PA 12 LED-USB

Bare: 600298000



### 12V Caulking Gun

KPA12 600

Bare: 601218850

KPA 12 400

Bare: 601217850

Discharge force: 990 lbs

Cartridge: 14 oz./21 oz.



### 12V Reciprocating Saw

PowerMaxx SSE 12 BL Compact

Bare: 602322890

**NEW**



See page 31  
for more recip saws

### 12V 4.0 Ah LiHD Battery Pack

625349000



### 12V 2.0 Ah Li-Ion Battery Pack

625406000



# POWER TOOL LINE



**BS 12**  
3/8" Drill/Driver



**BS 12 BL Quick**  
3/8" Drill/Driver

BRUSHLESS  
MOTOR



**SSD 12**  
1/2" Impact Driver



**SB 12**  
3/8" Hammer Drill/Driver



**SB 12 BL**  
3/8" Hammer Drill/Driver

BRUSHLESS  
MOTOR



**SSD 12 BL**  
1/2" Impact Driver

BRUSHLESS  
MOTOR

**Model:**  
**Drill/Drivers**

**BS 12**  
**601036520**  
**Kit: 2x 2.0Ah**

**BS 12 BL Quick**  
**601039520**  
**Kit: 2x 4.0Ah LiHD**

**Bare: 601036890**

**Bare: 601039890**

**Hammer Drills**

**SB 12**  
**601076520**  
**Kit: 2x 2.0Ah**

**SB 12 BL**  
**601077520**  
**Kit: 2x 4.0Ah LiHD**

**Bare: 601076890**

**Bare: 601077890**

**Combo Kits**

**SB 12 + SSD 12**  
**685167520**  
**Kit: 2x 2.0Ah**

**SB 12 BL + SSD**  
**12 BL**  
**685165520**  
**Kit: 2x 4.0Ah LiHD**

**Model:**  
**Drill/Drivers**

**SSD 12**  
**601114520**  
**Kit: 2x 2.0Ah**

**SSD 12 BL**  
**601115520**  
**Kit: 2x 4.0Ah LiHD**

**Bare: 601114890**

**Bare: 601115890**

Gearbox	2-speed	2-speed
Quick change chuck		• (BS 12 BL Quick only)
Planetary gearing	•	•
LED light	•	•
No-load speed (RPM)	360 / 1,400	500 / 1,650
Max impacts/min (hammer drills only)	21,000	21,000
Maximum tightening torque:		
- Soft case (continuous)	151 in.lbs	159 in.lbs
- Hard case (maximum)	354 in.lbs	398 in.lbs
Max chuck capacity (inch.)	3/8"	3/8"
Maximum drilling capacity		
- in mild steel	3/8"	3/8"
- in softwood	5/8"	1"
- in brick/block (hammer drills only)	3/8"	3/8"
Standard equipment:		
Side handle		
Batteries (kit only)	625406000	625349000
Quick change chuck		627259000*
Charger (kit only)	627046000	627046000*
Optional equipment:		
Quick right angle attachment		627261000*
Quick Magnetic Bit Holder		627241000*

\*BS 12 BL Quick only





# ASSEMBLY PROCESS FROM START TO FINISH

## CUTTING + DRILLING



**2.5" Metal Band Saw**  
MBS 18 LTX 2.5  
(see page 21)



**Metal Cutting Circular Saw**  
MKS 18 LTX 58  
(see page 21)



**4,000 RPM High-Speed Drill**  
BE 18 LTX 6  
(see page 24)



**18V 3-Speed 1/2" Brushless Drill/Driver**  
BS 18 LTX-3 BL Q I  
(see page 27)

**Up to 3,800 RPM!**

### Angle Grinders

(see page 20)

- WPB 18 LTX BL 115 (4 1/2")
- WPF 18 LTX 125 (5" Flathead)
- WPB 18 TLX BL 150 (6")
- WPB 36-18 LTX BL 230 (9")

Safety Brake: Quickly stops the wheel



Paddle Switch



Rotatable battery pack  
Ideal for grinding and cutting applications in hard to reach areas



**Optimum Performance with 6" Original Slicer!**  
#655339000  
(see page 66)



# WITH METABO CORDLESS

## TAPPING



**2 in 1: Push pull tapping tool & 1/2" Brushless Drill/Driver**  
 GB 18 LTX BL Q I  
 (see page 24)

**Chucks for Tapper**  
 1/2" Quick Change Tapping Chuck M8-M12 #627237000  
 1/2" Quick Change Tapping Chuck M4-M6 (up to 1/4") #627235000

## FASTENING



**Brushless 1/4" Impact Driver**  
 SSD 18 LTX 200 BL  
 (see page 25)



**Brushless High Torque 1/2" Impact Wrench**  
 SSW 18 LTX 300 BL  
 (see page 25)

## RIVETING

**NEW**



**Rivet Gun**  
 NP 18 LTX BL 5.0  
 (see page 24)

**Up to 1/4" Rivets in aluminum!**



# CORDLESS 4 1/2" -6" ANGLE GRINDERS



**WPB 18 LTX BL 115**  
4.5" Brushless Paddle  
Switch Angle Grinder with Brake




**WPF 18 LTX 125**  
5" Flat Head Paddle  
Switch Angle Grinder



**WPB 18 LTX BL 150**  
6" Brushless Paddle  
Switch Angle Grinder with Brake

Included:  
4 1/2" and 6" wheel  
guards, for use with  
all your applications

**Unique Feature:**  
Fits where no other  
grinder can reach!



**PATENTED FLAT HEAD  
GEARBOX DESIGN**

A 2-5/8" clearance fits  
acute angles as small as 43°

Model Kit:	<b>WPB 18 LTX BL 115</b> <b>613074620</b> Kit: 2x 5.5Ah LiHD batt	<b>WPB 18 LTX BL 150</b> <b>613076640</b> Kit: 2x 8.0Ah LiHD batt	<b>WPF 18 LTX 125</b> <b>US613070620</b> Kit: 2x 8.0 Ah LiHD batt
Bare Tool:	<b>613074860</b>	<b>613076860</b>	<b>613070860</b>
Switch Type	Non-Locking Paddle Switch	Non-Locking Paddle Switch	Non-Locking Paddle Switch
Max. wheel diameter	4.5" Dia.	6" Dia.	5" Dia.
Safety brake	•	•	
Power interruption protection	•	•	•
Electronic clutch	•	•	•
Electronic overload protection	•	•	•
Spindle lock	•	•	•
External carbon brush access			•
Rotatable battery pack	•	•	•
Detachable dust filter	• (included)	• (included)	• (included)
No-load speed (RPM)	9,000	9,000	8,000
<b>Standard equipment:</b>			
2 - 18V 8.0 Ah LiHD ext. batteries*	625369000	625369000	625369000
2 - 18V 5.5 Ah LiHD ext. batteries*	625368000	625368000	625368000
Type 27 wheel guard	339203480 (4-1/2")	339204450 (6") / 339203480 (4-1/2")	316055590
Side handle	316046590	316046590	316046590
Inner flange	341031290	341031290	341031290
Locking nut	341101480	341101480	341101480
Spanner wrench	623934000	623934000	623934000
Quick-clip on type 1 cutting guard	630351000	630353000	
Dust filter	313062620	316062620	343398890
Charger	627046000 (ASC 55)	627046000 (ASC 55)	627046000 (ASC 55)
*Note: Standard equipment is only available with kits			



2 x 18V - 9"

**WPB 36-18 LTX BL 230**  
9" Cordless Angle Grinder



LEARN MORE!



<b>Model Kit:</b>	<b>WPB 36-18 LTX BL 230</b>
<b>Bare Tool</b>	<b>613102860</b> (accepts 2 - 18V batteries)
Switch Type	Non-Locking Paddle Switch
Max. wheel diameter	9"
Motor	36V (2x 18V) Brushless
Rated input watts	2,400
Safety brake	3 sec
Power interruption protection	•
Electronic clutch	•
Electronic overload protection	•
Soft start	•
Side handle	Anti-vibration
Rotatable back handle	3 positions
No-load speed (RPM)	6,600
Carrying case (standard)	•
<b>Standard equipment:</b>	
Fast charger	
2 - 36V 6.2 Ah LiHD battery*	
Type 27 wheel guard	316065160
Side handle	314001470
Inner flange	341031850
Locking nut	341101480
Spanner wrench	623934000
<b>Optional Equipment:</b>	
9" Type 1 steel guard	630363000
7" Type 1 steel guard	630383000

**Lubrication Stick**  
#623443000



**Guide Rails**  
FS 80 #629010000  
FS 160 #629011000



**6-1/2" Steel Cut "Classic" Carbide Blade**  
(40 teeth) #628273000

**Aluminum Blade**  
(48 teeth) #628276000



**MBS 18 LTX 2.5**  
2.5" Band Saw with Brake

<b>Model</b>	<b>MBS 18 LTX 2.5</b>
<b>Bare Tool :</b>	<b>613022850</b>
Instant brake	< 1 sec
Blade change	"Quick" toolless blade change system
Max. cutting capacity	2.5"
Saw band speed	570 ft/min
Saw blade length	32-7/8"
Saw blade width	1/2"
<b>Standard equipment:</b>	
Blade guard	316095260
Allen key (3mm)	344199290
<b>Optional equipment:</b>	
Bandsaw blades 32-7/8" x 1/2" x .020" 14TPI (2pk)	626427000
Bandsaw blades 32-7/8" x 1/2" x .020" 18TPI (2pk)	626428000
Bandsaw blades 32-7/8" x 1/2" x .020" 14/18TPI (2pk)	626429000

2-1/2" Band Saw cuts precise burr-free cuts in metal, aluminum and plastic with minimal sparks



**MKS 18 LTX 58**  
Metal Cutting Circular Saw

<b>Model</b>	<b>MKS 18 LTX 58</b>
<b>Bare Tool :</b>	<b>600771850</b>
Instant brake	< 1 sec
Blade change	"Quick" toolless blade change system
Max. cutting capacity	2-1/4"
Saw blade	6-1/2"
No-load speed (RPM)	3,600
<b>Standard equipment:</b>	
6-1/2" Steel Cut "Classic" Carbide Blade (40 teeth)	628273000
Parallel guide/rip fence	331054750
Hexagonal wrench	344161520
Guide rail adaptor	339137930
<b>Optional equipment:</b>	
Lubrication stick	623443000
6-1/2" Aluminum "Professional" Blade (48 teeth)	628276000

# CORDLESS DIE GRINDERS AND BEVELING TOOL

**WORLD'S FIRST**

First cordless beveling tool for 45° chamfers up to 5/32" and radii 5/64" / 1/8"

**Cordless Beveling Tool**  
KFM 18 LTX 3 RF  
(5/32" capacity at 45°)  
(5/64", 1/8" radius)



Rotatable Battery Pack  
- For working in confined spaces

Detachable Dust Filter  
- Protects motor components from damage

Additional Cutting Guide  
- For increased precision of straight edges and perfect beveled corners

Patented One-Touch Controller  
- Tool free depth adjustment  
- Unmatched precision  
- Locked in depth settings



LEARN MORE!



**GPA 18 LTX**  
25,000 RPM Die Grinder



**GA 18 LTX G**  
6,000 RPM High Torque Die Grinder



**KFM 18 LTX 3 RF**  
Cordless Beveling Tool

Model Bare Tool:	GPA 18 LTX 600621860	GA 18 LTX G 600639860
Switch Type	Non-Locking Paddle Switch	Lock-on
Max. wheel diameter	2" Dia.	3" Dia.
Power interruption protection	•	•
Electronic clutch	•	•
Electronic overload protection	•	•
Spindle lock	•	•
Rotatable battery pack	•	•
Detachable dust filter	•	•
Collet bore	1/4"	1/4"
No-load speed (RPM)	25,000	6,000
Carrying case (standard) - kit only	344454760	344454760
<b>Standard equipment:</b>		
Collet wrench	344161300	344161300
1/4" collet	631949000	630821000
Side handle		631052000
Soft rubber grip	344099150	344099150
Dust filter	343398890	343398890
<b>Optional equipment:</b>		
1/8" collet	631948000	631948000

Model Bare Tool:	KFM 18 LTX 3 RF 601754750
<b>5.5Ah Kit:</b> ASC30-36 Chgr + 2 LiHD 18V 5.5 Ah Batteries	
<b>Bare Tool:</b>	<b>601754840</b>
No-Load RPM	7,000
Battery pack	(2) 18 V LiHD, 5.5 Ah
Charger	627380000 (ASC 145)
Max. chamfer height at 45°	5/32"
Possible radii	5/64" and 1/8"
Depth setting index	.004"
Type of edges	Chamfer and radius
Tool weight	6.8 lbs. (including battery)
<b>Standard equipment:</b>	
(2) 45 degree carbide inserts	623560000
(2) 1/8" (R3) radius carbide inserts	623562000
(2) 5/64" (R2) radius carbide inserts	623561000
Edge guide	316093380
MVT Vibrattech side handle	314000970
Dust filter	343398890

See Beveling Tools page 84

See Die Grinders Accessories page 91



**NEW**

**SCV 18 LTX BL 1.6**  
Cordless Shearer



**NEW**

**NIV 18 LTX BL 1.6**  
Cordless Nibbler

Model Bare Tool:	SCV 18 LTX BL 1.6 601615840	NIV 18 LTX BL 1.6 601614840
Type of battery pack	LiHD	LiHD
Battery voltage	18 V	18 V
No-load strokes per minute	1,350 - 4,840	660 - 2,360
Max. material thickness		
- Mild steel	16 gauge	1/16"
- Stainless steel	18 gauge	3/64"
- Aluminum	14 gauge	14 gauge
Smallest curve radius	5/8"	1 9/16"
Starting hole Ø	1"	53/64"
Cutting track width		13/64"
<b>Standard equipment:</b>	(2) Blades (630239000) (2) Hexagon Wrenches Feeler gauge MetaLoc Case	Punch (630243000) Die (630247000) Combination key MetaLoc Case
<b>Optional equipment:</b>		
For med-high carbon steel	2 Blades (630241000)	

SEE PAGE 94 FOR STAINLESS STEEL FINISHING TOOLS



**18V Burnisher**  
S 18 LTX 115

**18V Pipe / Tube Sander**  
RB 18 LTX 60

**18V Band File**  
BF 18 LTX 90

**18V Fillet Weld Grinder/Finisher**  
KNS 18 LTX 150



**NEW**

**MT 18 LTX BL QSL**  
18V Multi-Tool



Model Bare Tool:	Multi-Tool 613088840
Voltage	18 V
Length	250 mm / 10"
Electronics	VTC
Weight	2.6 lbs / 1,2 kg
Oscillating angle	3.2°
Oscillations per minute	8,000-20,000 opm
Accessory compatibility	Starlock®, StarlockPlus®
Brushless motor	•
Double LED Illumination	•
Tool-less magnetic blade change	•
<b>Standard equipment:</b>	Case, curved-tec StarlockPlus® wood + metal blade (626945000)

**StarlockPlus® SAW BLADES for the Multi-Tool**



**626945000**  
1-1/4" x 2 3/8" (32 x 60 mm)  
StarlockPlus® plunge saw blade  
For wood+metal



**626946000**  
1-1/4" x 2 3/8" (32 x 60 mm)  
StarlockPlus® plunge saw blade  
For wood



**626947000**  
1-1/4" x 2" (32 x 50 mm)  
StarlockPlus® precision saw blade  
For wood



**626948000**  
1-1/4" x 2" (32 x 50 mm)  
StarlockPlus® plunge saw blade  
For metal



**626949000**  
1-1/2" x 2" (40 x 53 mm)  
StarlockPlus® saw blade  
For wood/abrasive

**DEPTH STOP +  
DUST EXTRACTION**

**626943000**  
Depth stop + dust extraction

**SANDING PLATE**



**626944000**  
3-5/8" (93 mm)  
StarlockPlus® sanding plate

# CORDLESS DRILLING, RIVETING AND TAPPING



**BE 18 LTX 6**  
4,000 RPM High-Speed drill  
*Ideal for pilot holes and sheet metal*

Model Bare Tool:	BE 18 LTX 6 600261890
Aluminum die-cast gear housing	•
Electronic brake	•
No-load speed (RPM)	0-4,000
Max. tightening torque	35 in.lbs.
Max chuck capacity (inch.)	3/8"
Maximum drilling capacity	
- in mild steel	1/4"
Key Application	Sheet metal
<b>Optional equipment:</b>	
Side handle	631052000



**Rivet Gun**  
NP 18 LTX BL 5.0



LEARN MORE!

Model Bare Tool :	NP 18 LTX BL 5.0 619002890
Aluminum die-cast gear housing	•
Quick change chuck	•
LED light	•
Pulling force	10,000 N / 2,250 lbs.
Rivet capacity	
- in steel / stainless	3/16"
- in aluminum	3/16"
# of rivets with 4.0 Ah battery	5mm / 3/16" = 2,000



**GB 18 LTX BL Q I**  
2 in 1: Push pull tapping tool,  
1/2" Brushless Drill / Driver



**Tapping Tool with patented thread-tapping function cuts a perfect thread in seconds**

Model Bare Tool:	GB 18 LTX BL Q I 603828890
Gearbox	2-speed
Aluminum die-cast gear housing	•
Quick change chuck	•
Planetary gearing	•
Electronic brake	•
LED light	•
Impuls mode for removal of damaged screws and spot drilling on smooth surfaces	•
Max. tightening torque:	
- Soft case (continuous)/Hard case (maximum)	531 / 1,062 in. lbs.
Peak Torque	1,300 in. lbs.
Max. chuck capacity (inch.)	1/2"
Max. tapping capacity	M12 - 1/2"
Max. drilling capacity	
- in mild steel / in softwood	1/2" / 2-1/2"
No-load speed (RPM)	0-500 / 0-1,850
<b>Standard equipment:</b>	
Side handle	314001030
Quick change tapping chuck: M8-M12	627237000
Quick change tapping chuck: M4-M6	627235000
Belt hook	316052120
Bit depot	316052130
<b>Optional equipment:</b>	
Quick change chuck	627240000
Quick Power X3 torque multiplier	627256000
Quick right angle attachment	627242000
Quick Magnetic Bit Holder	627241000



# CORDLESS IMPACT DRIVERS AND WRENCHES



**WITH  
APS**



**WITH  
APS**



**SSD 18 LTX 200 BL**  
1/4" Hex Impact Driver

**SSW 18 LTX 300 BL**  
1/2" Impact Wrench

**SSW 18 LTX 400 BL**  
18V Brushless High Torque  
1/2" Impact Wrench

**SSW 18 LTX 600**  
18V High Torque  
1/2" Impact Wrench

Model Impact Driver/Impact Wrenches	<b>SSD 18 LTX 200 BL</b> <b>602396520</b> Kit: 2x 4.0 Ah LiHD	<b>SSW 18 LTX 300 BL</b> <b>602395520</b> Kit: 2x 4.0 Ah LiHD	<b>SSW 18 LTX 400 BL</b> <b>US602205550</b> Kit: 2x 5.5 Ah LiHD <b>US602205310</b> Kit: 2x 4.0 Ah LiHD	<b>SSW 18 LTX 600</b> <b>US602198550</b> Kit: 2x 5.5 Ah LiHD
	<b>Bare: 602396890</b>	<b>Bare: 602395890</b>	<b>Bare: 602205890</b>	<b>Bare: 602198890</b>
<u>APS mode:</u> Automatic Power Shift (APS) monitors drilling speed and automatically adjusts torque when driving self-tapping screws	•	•		
Electronics	Variospeed (V)	Variospeed (V)	Variospeed (V)	Variospeed (V)
Speed range	• 12 settings	• 12 settings	• 12 settings	
Aluminum die-cast gear housing	•	•	•	•
LED light	•	•	•	•
Drive	1/4" Hex	1/2" square w/ring retention	1/2" square w/ring retention	1/2" square w/ring retention
No-load speed (RPM)	0-2,900	0-2,650	0-2,150	0-1,600
Max. tightening torque	150 ft. lbs	221 ft. lbs	295 ft. lbs	450 ft. lbs
Max. impacts/min. (BPM)	4,000	3,750	4,250	2,200
Carrying case* (standard) - kit only	344455010	344455010	344455010	344455010
<b>Standard equipment (depending on version):</b>				
2-18V 5.5 Ah LiHD ext. batteries*			625368000	625368000
2-18V 4.0 Ah LiHD ext. batteries*	625367000	625367000	625367000	
Charger*	627046000 (ASC 55)	627046000 (ASC 55)	627046000 (ASC 55)	627046000 (ASC 55)
Belt hook	316052120	316052120	316052120	316052120
Bit depot	316052130	316052130		
*Note: Standard equipment is only available w/kits				
<b>Optional equipment:</b>				
Adaptor 1/2" sq. to 1/4" hex		628836000	628836000	628836000

**SB 18 LTX BL I + SSD 18 LTX 200 BL Combo Kit**  
1/2" Hammer Drill + 1/2" Impact Driver  
**US685127520**



**NEW**

**WITH  
APS**

	<b>SB 18 LTX BL I</b>	<b>SSD 18 LTX 200 BL</b>
Gearbox	2-speed	
Planetary gearing	•	•
Electronic brake	•	
LED light	•	
Impuls mode	•	
Max. tightening torque:		
- Hard case (maximum)	1,062 in. lbs.	
Peak Torque	1,300 in. lbs.	
Maximum drilling capacity		
- in mild steel/ softwood	1/2" / 2-1/2"	
- in brick/block (hammer drills only)	5/8"	
No-load speed (RPM)	0-500 / 0-1,850	
Max impacts/min (hammer drills only)	32,300	
<b>Standard equipment:</b>		
Side handle	314001030	
Belt hook	316052120	
Bit depot	316052130	
		<u>APS mode:</u> Automatic Power Shift (APS) monitors drilling speed and automatically adjusts torque when driving self-tapping screws
		Electronics
		Variospeed (V)
		Speed range
		• 12 settings
		LED light
		•
		Drive
		1/4" Hex
		No-load speed (RPM)
		0-2,900
		Max. tightening torque
		150 ft. lbs
		Max. impacts/min. (BPM)
		4,000
		<b>Standard equipment</b>
		Belt hook
		316052120
		Bit depot
		316052130
		<b>Includes 2x5.2 Ah Li-Ion Batteries, Charger and Carrying Case</b>

# The Right Drill for the Right Application



LEARN MORE!

Quick Change Chuck with 1/4" hex bit holder



M-QUICK



PRECISION STOP

11 Electronically Controlled Clutch Settings:  
- Precise  
- Impuls mode for drilling into hard surfaces

Quick Accessories:  
- Right Angle Attachment  
- X3 Torque Multiplier  
- Lock-on Bit Holder

3 SPEED

3-Speed Gearbox for Versatile Use:  
- 3,800 RPM for fast drilling and pilot holes  
- 2,050 RPM for most common applications  
- 600 RPM for high torque needs

Most Powerful BL Motor  
- Up to 1,300 in. lbs. torque  
- Longest life and runtime

BRUSHLESS MOTOR

18V 1/2" Brushless Hammer Drill/Driver  
SB 18 LTX-3 BL Q I

# L

CLASS

Heavy Duty

for everyday applications



# LT

CLASS

Super Duty

for demanding applications



# LTX

CLASS

EXTREME DUTY

with reserve power to go beyond



HEAVY DUTY



1/2" Drill/Driver  
BS 18 L Quick  
#02317520 (2x 2.0Ah)

Chuck: 1/2"  
RPM: 0-450 / 0-1,800  
Max Torque: 442 in. lbs.  
BPM:

SUPER DUTY



BRUSHLESS MOTOR

1/2" Brushless Drill/Driver  
BS 18 LT BL  
#602325890 (BARE)  
#602325520 (2 X 2.0Ah)

Chuck: 1/2"  
RPM: 0-600 / 0-2,100  
Max Torque: 664 in. lbs.  
BPM:

NEW



BRUSHLESS MOTOR

1/2" Brushless Drill/Driver  
BS 18 LT BL Q  
#602334890 (BARE)

Chuck: 1/2"  
RPM: 0-600 / 0-2,100  
Max Torque: 664 in. lbs.



BRUSHLESS MOTOR

1/2" Brushless Hammer Drill/Driver  
SB 18 LT BL  
#602316890 (BARE)  
#602316520 (2x 2.0Ah)

Chuck: 1/2"  
RPM: 0-600 / 0-2,100  
Max Torque: 664 in. lbs.  
BPM: 31,950

EXTREME DUTY



BRUSHLESS MOTOR



1/2" Brushless Drill/Driver  
BS 18 LTX BL I  
#602350890 (BARE)  
#602350520 (2x 5.2Ah)

Chuck: 1/2"  
RPM: 0-500 / 0-1,850  
Peak Torque: 1,300 in. lbs.  
BPM:



BRUSHLESS MOTOR



1/2" Hammer Drill/Driver  
SB 18 LTX BL I  
#602352890 (BARE)  
#602352520 (2x 5.2Ah)

Chuck: 1/2"  
RPM: 0-500 / 0-1,850  
Peak Torque: 1,300 in. lbs.  
BPM: 32,300

3 SPEED

BRUSHLESS MOTOR



1/2" Brushless Drill/Driver  
BS 18 LTX-3 BL Q I  
#602355890 (BARE)  
#602355620 (2x 5.5Ah LiHD)

Chuck: 1/2"  
RPM: 0-600 / 0-2,050/0-3,800  
Peak Torque: 1,300 in. lbs.

3 SPEED

BRUSHLESS MOTOR



1/2" Brushless Hmr Drill/Driver  
SB 18 LTX-3 BL Q I  
#602357840 (BARE)  
#602357620 (2x 5.5Ah LiHD)

Chuck: 1/2"  
RPM: 0-600 / 0-2,050/0-3,800  
Peak Torque: 1,300 in. lbs.  
BPM: 32,300

# CORDLESS DRILL/DRIVERS



**BS 18 L Quick**  
1/2" Drill/Driver



**BS 18 LT BL**  
1/2" Brushless Drill/Driver



**BS 18 LT BL Q**  
1/2" Brushless Drill/Driver



**BS 18 LTX BL I**  
1/2" Brushless Drill/Driver



**BS 18 LTX-3 BL Q I**  
1/2" Brushless Drill/Driver

**SB 18 LT BL**  
1/2" Hammer Drill/Driver

**SB 18 LTX BL I**  
1/2" Hammer Drill/Driver

**SB 18 LTX-3 BL Q I**  
1/2" Hammer Drill/Driver

**Model:  
Drill/Drivers**

**BS 18 L Quick**  
**602320620**  
Kit: 2 x 2.0 Ah

**BS 18 LT BL**  
**602325520**  
Kit: 2 X 2.0Ah  
**Bare:** 602325890

**BS 18 LT BL Q**  
**Bare:** 602334890

**BS 18 LTX BL I**  
**602350520**  
Kit: 2 x 5.2 Ah  
**Bare:** 602350890

**BS 18 LTX-3 BL Q I**  
**602355620**  
Kit: 2 x 5.5 Ah LiHD  
**Bare:** 602355890

**Hammer Drills**

**SB 18 LT BL**  
**602316520**  
Kit: 2 x 2.0 Ah  
**Bare:** 602316890

**SB 18 LTX BL I**  
**602352520**  
Kit: 2 x 5.2 Ah  
**Bare:** 602352890

**SB 18 LTX-3 BL Q I**  
**602357620**  
Kit: 2 x 5.5 Ah LiHD  
**Bare:** 602357840

Gearbox	2-speed	2-speed	2-speed	2-speed	3-speed
Aluminum die-cast gear housing				•	•
Quick change chuck	•		•		•
Planetary gearing	•	•	•	•	•
Electronic brake	•	•	•	•	•
LED light	•	•	•	•	•
Impuls mode for removal of damaged screws and spot drilling on smooth surfaces				•	•
Maximum tightening torque:					
- Hard case (maximum)	442 in. lbs.	664 in. lbs.	664 in. lbs.	1,062 in. lbs.	1,062 in. lbs.
Peak Torque				1,300 in. lbs.	1,300 in. lbs.
Max chuck capacity (inch.)	1/2"	1/2"	1/2"	1/2"	1/2"
Maximum drilling capacity					
- in mild steel	3/8"	1/2"	1/2"	1/2"	1/2"
- in softwood	3/4"	1-1/2"	1-1/2"	2-1/2"	2-1/2"
- in brick/block (hammer drills only)_	3/8"	1/2"	1/2"	5/8"	5/8"
No-load speed (RPM)	0-450 / 0-1,800	0-600 / 0-2,100	0-600 / 0-2,100	0-500 / 0-1,850	0-500 / 0-2,050 / 0-3,800
Max impacts/min (hammer drills only)		31,950	31,950	32,300	32,300
<b>Standard equipment:</b>					
Side handle				314001030	314001030
Batteries (kit only)					
2 x 2.0 Ah Li-Power	625596000	625596000			
2 x 5.2 Ah Li-Power				625592000	
2 x 5.5Ah LiHD					625368000
Quick change chuck	636608000		627240000		627240000
Charger (kit only)	627046000 (ASC 55)	627046000 (ASC 55)		627046000 (ASC 55)	627380000 (ASC 145)
Belt hook	316052120	316052120	316052120	316052120	316052120
Bit depot		316052130	316052130	316052130	316052130
<b>Optional equipment:</b>					
Quick Power X3 torque multiplier					627256000
Quick right angle attachment	627261000		627077000		627242000
Quick Magnetic Bit Holder	627241000		627241000		627241000

# CORDLESS SCREW GUNS, CAULKING GUNS, HEAT GUN & MIXER



**SE 18 LTX 2500**  
2,500 RPM Drywall Screw Gun  
*Ideal for hard wood studs*

**SE 18 LTX 4000**  
4,000 RPM Drywall Screw gun  
*The most versatile*

**SE 18 LTX 6000**  
6,000 RPM Drywall Screw gun  
*Ideal for metal studs*

LEARN MORE!

**KPA 18 LTX 400 / KPA 18 LTX 600**  
18V Caulking Guns

Model Bare Tool:	SE 18 LTX 2500 620047890	SE 18 LTX 4000 620048890	SE 18 LTX 6000 620049890
Aluminum die-cast gear housing			
Electronic brake	•	•	•
LED light	•	•	
No-load speed (RPM)	0-2,500	0-4,000	0-6,000
Max. tightening torque	80 in. lbs	62 in. lbs	44 in.lbs
Max chuck capacity (inch.)	P2	P2	P2
Maximum drilling capacity - in mild steel			
Key Application	Wood studs	Generalist	Metal studs
<b>Standard equipment:</b>			
Side handle			
Depth Gauge	316054470	316054470	316054470
Magnetic Bit holder	316055470	316055470	316055470
Belt hook	316052120	316052120	316052120

Model Bare Tool:	KPA 18 LTX 400 601206850	KPA 18 LTX 600 601207850
Discharge force	1,632 lbs.	
Discharge speed	3/64" to 3/8" per sec	
Max. cartridge capacity	15-3/4" (400m/14oz)	23-1/2" (600m/21oz)
Variable speed	•	
Cartridge holder	315420000 (standard)	

**Screwdriver Magazine**  
Model: SM 5-55  
#631618000

**2 Phillips Bits**  
180mm  
#631582000

**HG 18 LTX 500**  
18V Cordless Dual Temperature Heat Gun



Model Bare Tool:	HG 18 LTX 500 610502850
LED Light	•
Temperature regulation via thumb wheel	•
Batteries	Compatible with Metabo Lilon or LiHD batteries
Runtime (8.0 Ah Battery)	20+ minutes
Temperature range	570 °F - 930 recip °F
Time to temperature	5 sec (572 °F)
Air Flow/Volume	6-7 CFM
Carrying case (optional)	
Tool weight (lbs) without batteries	1.1 lbs.
<b>Standard Equipment:</b>	
Wrap around nozzle	630004000
Reducing nozzle	630005000

**STANDARD EQUIPMENT FOR HG 18 LTX 500**

**630004000**  
Wrap around nozzle

**630005000**  
Reducing nozzle

**RW 18 LTX 120**  
Cordless Mixer



Model Bare Tool:	RW 18 LTX 120 601163850
Rated no-load speed	760 RPM
Electronics:	VC
Overload protection	•
Max. stirring paddle dia.	4.7" (120mm)
Paddle connection	M14
Mixing capacity with 5.2 Ah battery	113 Gal of paint
	26 Gal of concrete / mortar mix
<b>Standard equipment:</b>	23" RS-R2 mixing paddle (626738000) Type RS-R2 right spiral – mixing effect from bottom to top: <i>Ideal for all sticky and viscous materials</i>
<b>Optional equipment:</b>	23" RS-R3 mixing paddle (626735000) Type RS-R3 right spiral – mixing effect from bottom to top: <i>Ideal for heavy and viscous materials</i>

See page 141 for more heat guns

**18V Rotary Hammer with Integrated Dust Collection**

KHA 18 LTX BL 24 Quick + ISA 18 LTX




Integrated dust collector



Ask for the objective data

Vibration dampening side-handle

Heavy Duty aluminum gear box with high efficiency hammer mechanism

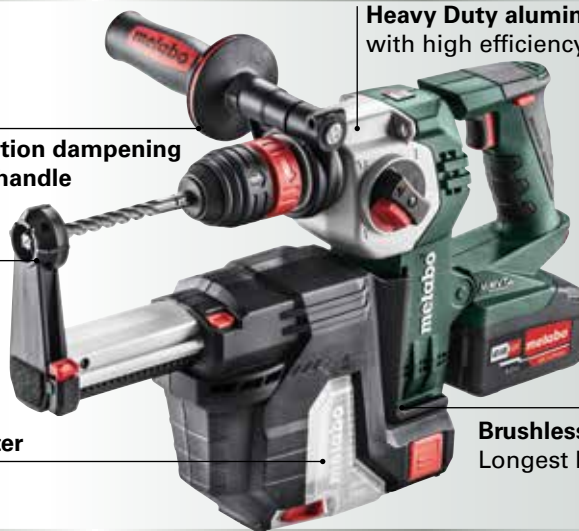

HEPA Filter

Brushless motor  
Longest life and runtime



**KHA 18 LTX BL 24 Q + ISA 18 LTX**  
1" SDS-Plus Combination Hammer



**KHA 36-18 LTX 32**  
1 1/4" SDS-Plus Combination Hammer

<b>Model</b> 5.2 Ah Kit: 2 Li-Ion 5.2 Ah Batteries	<b>KHA 18 LTX BL 24 Q + ISA 18 LTX (18V)</b> <b>600211950 (+ Dust Extraction)</b>	<b>KHA 36-18 LTX 32 (2x 18V)</b> n/a
<b>Hammer and Dust Extraction</b> (w/o battery kit)	<b>600211900</b>	
<b>Bare Tool:</b>	<b>600211850</b>	<b>600796840</b>
Max. Single blow energy (EPTA)	2.2 J	3.1 J
Metabo safety slip clutch	•	•
Rotation stop for chiseling	•	•
Max tightening torque (inch lbs.)	133	142
360° Anti-vibration side handle	•	•
MVT vibrattech handles	•	•
Capacity		
- in concrete (using chuck adaptor)	1"	1 1/4"
- in mild steel (using chuck adaptor)	1/2"	1/2"
- in softwood	1"	1 3/16"
No-load speed (RPM)	0-1,200	0-1,100
No-load blows per minute (BPM)	0-4,500	0-4,500
<b>Standard equipment:</b>	Side handle (314001140) 3-jaw keyless quick chuck (631968000) (2) 18V 5.2 Ah Batteries (625592000) 627046000 (ASC 55)	MVT Side handle (314001380) 3-jaw keyless quick chuck (631968000)
<b>Optional equipment:</b>		Depth gauge (341511630) Dust extraction adaptor (630829000)

see page 131 for full range of SDS-Plus carbide bits

# CORDLESS SAWS



**STA 18 LTX 100**  
18V Jig Saw



**STAB 18 LTX 100**  
18V Jig Saw



**STA 18 LTX 140**  
18V Jig Saw



Model Bare Tool:	STA 18 LTX 100 601002890	STAB 18 LTX 100 601003890	STA 18 LTX 140 601405890
Electronics	Vario tacho constamatic (VTC)	Vario tacho constamatic (VTC)	Vario tacho constamatic (VTC)
"Quick" toolless blade change	•	•	•
Instant break	•	•	•
Die-cast aluminum gear housing	•	•	•
4-stage orbital blade stroke	•	•	•
LED illuminates cut line			•
Chip blower	•	•	•
Bevel cutting stops at 15°, 30°, 45°	•	•	•
Removable surface protective base plate	•	•	•
Automatic acceleration for easy starts			•
Electronic speed stabilization	•	•	•
Variable speed dial	•		•
Max material thickness			
- in wood	4"	4"	5 1/4"
- in non-ferrous metal	1"	1"	1 3/8"
- in sheet steel	3/8"	3/8"	3/8"
No-load strokes per minute (SPM)	550-2,800	0-2,800	0-3,000
<b>Standard equipment:</b>	Anti-splintering insert (631208000)	Anti-splintering insert (631208000)	Anti-splintering insert (631208000)
	Vacuum port	Vacuum port	Protective base cover (623664000)
<b>Optional equipment:</b>	Circle-cutting and parallel guide (623591000)	Circle-cutting and parallel guide (623591000)	Circle-cutting and parallel guide (623591000)
	Protective base cover (623595000)	Protective base cover (623595000)	Protective base cover (623595000)
	Guide rail adapter (631249000)	Guide rail adapter (631249000)	Dust extraction set (623669000)
	Base plate (623664000)	Base plate (623664000)	

See jig saw blades page 36-37

## OPTIONAL EQUIPMENT

**Anti-splintering insert**  
#631208000




**Protective base plate cover**  
#623595000  
For STA 18 LTX 100 and  
STAB 18 LTX 100



**Dust extraction set**  
#623669000




**Circle-cutting and parallel guide**  
#623591000



**Guide rail adapter**  
#631249000




**Protective base plate cover**  
#623664000  
For STA 18 LTX 140



**Guide Rails**  
FS 80 #629010000  
FS 160 #629011000

See all guide rail accessories page 35



**Circle/Rip Guide**  
For cutting circles 4" to 14" dia.  
#631340000

See recip saw blades page 37

**NEW**

BRUSHLESS MOTOR



**PowerMaxx SSE 12 BL Compact**  
12V Reciprocating Saw  
(battery capacity 2.0/4.0 Ah)



**SSE 18 LTX Compact**  
18V Reciprocating Saw



**ASE 18 LTX**  
18V Reciprocating Saw

**NEW**

BRUSHLESS MOTOR



**SSE 18 LTX BL**  
18V Reciprocating Saw  
(compatible w/all 18V Li-Ion/LiHD)

**NEW**

BRUSHLESS MOTOR




**SSE 18 LTX BL Compact**  
18V Reciprocating Saw

Model	ASE 18 LTX (18V)	PowerMaxx SSE 12 BL Compact (12V)	SSE 18 LTX BL Kit: 2x5.5 Ah LiHD US602267550 (18V)	SSE 18 LTX Compact (18V)	SSE 18 LTX BL Compact (18V)
<b>5.5 Ah Kit:</b> 2 x liHD 5.5 Ah Batteries					
<b>Bare Tool:</b>	<b>602269850</b>	<b>602322890</b>	<b>602267850</b>	<b>602266890</b>	<b>602366840</b>
Dual blade capability - recip & jig saw blade		•		•	•
Aluminum die-cast gear housing	•	•	•	•	•
"Quick" tool-less blade change	•	•	•	•	•
Adjustable depth shoe	•	Tool-less	Tool-less	Tool-less	Tool-less
Unique Metabo Brushless motor		•	•		•
Ergonomic rubber coated handle	•	•	•	•	•
LED light		•	•	•	•
No-load speed (SPM)	0-2,700	0-3,000	0-2,700	0-3,300	0-3,000
Stroke length	1 1/16"	5/8"	1 1/4"	1/2"	5/8"
<b>Standard equipment:</b>	Hex key (344161520)	(1) Blade, carrying case			



**6-1/2" "Classic" Precision Cut Carbide Blade (18 teeth)**

#628272000



**KS 18 LTX 57**  
18V Circular Saw



**HO 18 LTX 20-82**  
18V Planer



Model	KS 18 LTX 57
<b>Bare Tool:</b>	<b>601857890</b>
Aluminum die-cast gear housing	•
Ergonomic handle with rubber	•
Cutting depth indicator	•
Dust extraction outlet	•
Spindle lock	•
Saw blade diameter/arbor	6 1/2" / 5/8" or 20mm
Cutting depth 90°	2 1/4"
Cutting depth 45°	1 11/16"
Angle setting	0-50°
No-load speed (RPM)	4,600
<b>Standard equipment:</b>	Carbide blade 18T (628272000) Rip guide (331050820) Hexagonal wrench (344161520)

Model	HO 18 LTX 20-82
<b>Bare Tool:</b>	<b>602082890</b>
<b>Electronic features:</b>	
Soft start feature	•
Overload protection	•
Planing width	3-1/4" or 82mm
Adjustable planing depth	0- 2mm
Max. notch depth	9mm
No-load speed (RPM)	16,000
<b>Standard equipment:</b>	Reversible carbide blades Rip guide Setting gauge Chip ejection adapter Fabric dust bag

## 18V Shop Fan AV 18



Model Bare Tool:	AV 18 606176850
CFM	2,120
Speed	3-speed
Run time	Up to 7 hours
Metal frame features rubber feet for stability when free-standing, can be mounted on a tripod, or wall mounted	•
Overload protection and single cell protection	•

## 18V Hand Held Shop Blower AG 18



Model Bare Tool:	AG 18 602242850
CFM	92
Adjustable length blowpipe for quick and easy changes between working at floor level or on workbenches	•
Rubber nozzle to avoid damaging soft materials	•
Overload protection and single cell protection	•



## Cordless HEPA Vacuum 74 CFM

AS 18 PC HEPA  
#602021860 (BARE)



Model Bare Tool:	AS 18 PC HEPA 602021860	Equipment:
Press clean: manual filter cleaning uses powerful air stream	•	<b>Standard:</b>
Dual power setting: Eco-mode for extended run time. Boost for powerful suction	•	Fleece bag (630173000)
Non-slip rubber base	•	Suction Hose (630171000)
Metaloc box, designed for stacking	•	Additional brush ring (628215000)
Capacity display	•	Floor nozzle (630320000)
Run time	20 min / 40 min (ECO)	Crevice tool (630323000)
Airflow, CFM	74	<b>Optional:</b>
Max. vacuum pressure mBar	120	5 Fleece Filter Bags (630173000)
Container capacity (dry pick-up)	2 gallons	Portable base w/locking casters (630174000)
		HEPA Filter (630175000)



## USB Charger and Adaptor PA 14.4-18 LED-USB #600288000 (BARE)



Model Bare Tool:	PA 14.4-18 LED-USB 600288000
LED Light	Up to 7 hours
USB	Charges 2 cell phones or 1 tablet
Operates with (Li-Power or LiHD) slide-on battery packs	14.4V-18V
12V connection for Metabo heated jacket	12V
Automatic shutdown - in the event overheating or short circuit	•





**BSA Tripod**  
#623729000

**Construction Tripod**  
#628791000



**18V LED Flashlight**  
ULA 14.4-18



**18V LED Work Light**  
SLA 14.4-18 LED

Model Bare Tool:	ULA 14.4-18 600368000
12 position head	•
Single LED / 280 Lumens	•
Bright, consistent, white light	•

Model Bare Tool:	SLA 14.4-18 600370000
Head swivels 180°	•
6 LEDS / 480 Lumens	•
Bright, white DIFFUSED LIGHT	•




**18V LED Site Light**  
BSA 14.4-18



**18V LED Site Light**  
BSA 14.4-18 Industrial  
(includes lens diffuser  
and mounting - magnetic)



**Laser Distance Meter**  
LD 30

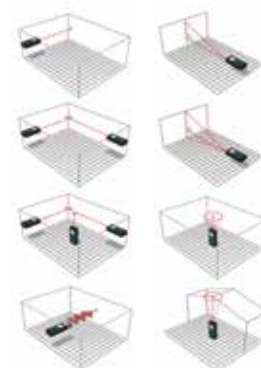

**Laser Distance Meter**  
LD 60

Model 5.2Ah Kit: 1 Li-Ion 5.2 Ah Battery, Charger + Soft Tool Bag Bare Tool:	BSA 14.4-18 US602111750  602111850	BSA 14.4-18 Industrial  602111010
Head swivels 180°	•	•
18 Powerful LEDS	•	•
Brightness	1,200 / 2,600 Lumen	1,200 / 2,600 Lumen
Bright, consistent white light over a wide area	•	•
WATERPROOF RATED IP56	•	•
Carrying handle	•	•
SAFE! Cool to the touch	•	•
Anti-Skid base	•	•
Integrated wall hanging mount	•	•
5/8-11" threaded mount	•	•
Lens protection screen (6235690000)	optional	standard
Tripod stand	(623729000)	(623729000)
Magnet base	optional	standard

Model Bare Tool:	LD 30 606162000	LD 60 606163000
Range	30 meters / 100 ft.	60 meters / 200 ft.
LED display	•	• (illuminated)
Signal sound	•	•
Impact resistant	•	•
Rubber grip	•	•
Length	•	•
Area	•	•
Volume	•	•
Continuous measurement	•	•
Pythagorean 1	•	•
Pythagorean 2	•	•
Minimum distance continuous measurement	•	•
Maximum distance continuous measurement	•	•

## 18V BATTERIES

### Li-Ion Power



#### 2.0 Ah Li-Ion



**625596000**

Most compact for maximum flexibility.

#### 5.2 Li-Ion



**625592000**

Generous runtime for heavy applications.

#### 4.0 LiHD Compact



**625367000**

Significantly smaller and lighter than full size battery packs. Provides run-time similar to many industry standard full size 18V batteries.

#### 5.5 Ah LiHD



**625368000**

Extreme power output, run-time and performance for largest range of applications.

#### 8.0 Ah LiHD



**625369000**

The ultimate professional battery for the most demanding industrial applications.




**PA 14.4-18 LED-USB**  
**600288000 (BARE)**  
USB Charger and Adaptor

## 18V BATTERY KITS

Order#	Desc.	Included
US625342002	LiHD Ultra-M Pro Kit	(2) 5.5 Ah, Carrying Case, Charger
US625596020	Ultra-M Compact Kit	(2) 2.0 Ah, Carrying Case, Charger
US625596052	Ultra-M Starter Kit	2.0 Ah + 5.2 Ah, Carrying Case, Charger
US625596252	Ultra-M Professional Kit	(2) 5.2 Ah, Carrying Case, Charger
US625367002	LiHD Compact Kit	(2) 4.0 Ah, Carrying Case, Charger
US625369011	LiHD + 8.0 Ah LiHD Kit	4.0 Ah + 8.0 Ah, Carrying Case, Charger
US625369002	LiHD Pro Kit	(2) 8.0 Ah, Carrying Case, Charger

## CHARGERS

**ASC Multi 8**  
**627301000**  
Air-Cooled  
Multi-Bay Charger

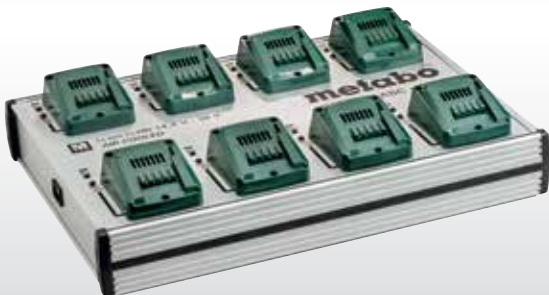

- Charges 8 batteries simultaneously
- Works with 12V, 18V and 36V batteries
- **Heavy Duty** aluminum housing
- Wall mounting



**ASC 55 Air-Cooled Charger**  
**627046000**  
For 12V, 18V and 36V batteries  
(charges 18V 4.0Ah in 68 min)



**ASC Ultra Fast Air-Cooled Charger**  
**627268000**  
For 12V, 18V and 36V batteries  
(charges 36V 6.2Ah in 57 min)



**ASC 145 Fast Air-Cooled Charger**  
**627380000**  
For 12V, 18V and 36V batteries  
(charges 18V 8.0Ah in 1 hour)

## ADAPTORS AND TORQUE MULTIPLIER



**Quick Off-set Attachment**  
627234000 for BS 12 BL Q



**Quick Change Right Angle Drive Adaptor**  
627242000  
Fits LTX tools



**Quick Change Right Angle Drive Adaptor**  
627261000 For BS 12 BL Quick  
For BS 18 Quick (previous version)



**Quick Change Right Angle Drive Adaptor**  
627077000  
For BS 18 L Quick



**Quick Bit Holder**  
627241000  
For All quick drills



**Quick Change Chuck**  
627240000 - 1/2" Chuck  
For BS 18 LTX BL Quick and SB 18 LTX BL Quick



**636608000 - 1/2" Chuck**  
For BS 18 L Quick



**627259000 - 3/8" Chuck**  
For BS 12 BL Quick



**Tapping Chuck**  
M8-M12: 627237000  
With square insert for machine taps > 1/4"  
M4-M6: 627235000  
With square insert for machine taps ≤ 1/4"

### X3 Torque Multiplier

**X3 Attachment**  
627256000  
Multiplies torque by 3 times for tasks that demand more power. Fits the BS 18 LTX-3 BL Q I, and SB 18 LTX-3 BL Q I

## TOOL BAGS




**Small Tool Bag**  
657006000



**Large Tool Bag**  
657007000

## GUIDE RAIL ACCESSORIES



**Guide Rail FS 80**  
629010000  
32 inch.



**Guide Rail FS 160**  
629011000  
63 inch.

**Connector FSV for Guide Rails FS**  
629022000



**Mitre Fence FSW**  
629026000



**Saw Guide (for KSA 18 LTX)**  
631019000

**Twist Tensioning Clamp 2 pc set**  
631031000




























Slides under FS guide rail for flush mounting







**Quick Tensioning Clamp FSSZ**  
629021000

# JIG SAW BLADES (BAYONET FITTING)

















These blades fit : Metabo, AEG, Atlas Copco, Black & Decker, Bosch, DeWalt, Elu, Festo, Hitachi, Holz-Her, Kress, Makita, Skil ...


Saw-blade/Type	Material	Cutting Edge	Teeth Per Inch	Uses	Corr. Bosch Type	Pcs./ Pk.	Order No.
<b>For wood the &gt;Classic&lt; series low-price and reliable</b>				<b>HCS milled</b>			
Wavy-set, milled 	HCS	2"	12	Hardwood, softwood, chip-board, block-board, fibre-board, 7/64"-9/16" in., plastics, insulation materials	T119B	5	623631000
Wavy-set, milled 	HCS	2"	12	As above, 7/64"-3/4" in. , specially for curved cuts	T119BO	5	623646000
Wavy-set, milled 	HCS	3"	8	For quick, rough cuts in hardwood, softwood, plastics, 7/32"-2" in.	T111C	5	623632000
Wavy-set, milled 	HCS	3 1/2"	10	For quick, rough cuts in hardwood, softwood, plastics, 7/32"-2" in.	U101B	5	623943000
<b>For wood the &gt;Professional&lt; series quick, clean, accurate cuts</b>				<b>HCS ground</b>			
Side-set, ground 	HCS	3"	6	Hardwood, softwood, chip-board, block-board, 7/32"-2" in., for quick cuts	T144D	5	623633000
Side-set, ground 	HCS	5"	6	Hardwood, softwood, chip-board, block-board, fibre-board, structural timber, 1/4"-4" in., for quick cuts	T344D	5	623678000
Tapered, ground 	HCS	2"	18	Softwood, plywood, plastics, 1/16" - 9/16" in., for a non-splintering cut, specially for curved cuts	T101AO	5	623651000
Clearance - angle, teeth ground 	HCS	6"	6	Hardwood, softwood up to 5 1/4" in., chip-board, block-board	T744D	5	623603000
Clearance - angle, teeth ground 	HCS	3"	10	Hardwood, softwood, chip-board, block-board, fibre-board, plastics, 1/8"-1 3/16" in., for a really clean cut	T101B	5	623634000
Clearance - angle, teeth Ground, reversed-toothed 	HCS	3"	10	Hardwood, softwood, chip-board, block-board, fibre-board, coated boards, 1/8"-1 3/16" in., for a really clean cut	T101BR	5	623650000
Clearance - angle, teeth ground 	HCS	3"	6	Hardwood, softwood, chip-board, block-board, fibre-board, 3/8"-1 3/4" in., for a really clean cut	T101D	5	623635000
Clearance - angle, teeth ground 	HCS	3 1/2"	8	Hardwood, softwood, chip-board, block-board, fibre-board, 3/8"-2 3/8" in., for a really clean cut	T301CD	5	623654000
Clearance - angle, teeth ground 	HCS	4"	6	Extra thick, for accurate, precisely angled cuts in hardwood, softwood, chip-board, block-board, fibre-board, 7/32"-4" in.	T344DP	5	623679000
<b>For wood the &gt;Pionier&lt; series quick, clean cuts in wood of all thicknesses</b>				<b>HCS ground</b>			
Clearance - angle, teeth ground, progressive tooth pitch 	HCS	3 1/2"	progres- sive	Straight, clean cuts in wood-based materials, thick or thin, 7/64"-2 9/16" in., for quick cuts	T234X	5	623675000
<b>For wood the &gt;Professional&lt; series quick, clean, accurate cuts - and a long useful life</b>				<b>BiM ground</b>			
Clearance - angle, teeth ground 	BiM	3"	10	Hardwood, softwood, laminates, coated boards, plastics, 1/8"-1 3/16" in., for a really clean cut	T101BF	5	623975000
<b>Universal the &gt;Pionier&lt; series for wood, metal, plastic</b>				<b>BiM milled</b>			
Side-set, milled 	BiM	4"	progres- sive	Universal blade for wood (even with nails), metals, non-ferrous metals, and plastics	T345XF	5	623677000
<b>For metal the &gt;Classic&lt; series low-price and reliable</b>				<b>HSS milled</b>			
Wavy-set, milled 	HSS	2"	36	Sheet-steel, up to 1/16" in., non-ferrous metals	T118G	5	623636000
Wavy-set, milled 	HSS	2"	24	Sheet-steel, 3/64"-1/8" in., non-ferrous metals	T118A	5	623637000
Wavy-set, milled 	HSS	4"	24	Sheet-steel, 3/64"-1/8" in., non-ferrous metals, sandwich materials	T318A	5	623629000
Wavy-set, milled 	HSS	2"	12	Sheet-steel, 1/8"-1/4" in., non-ferrous metals	T118B	5	623638000
Wavy-set, milled 	HSS	2 1/4"	13	Sheet-steel, 1/8"-1/4" in., non-ferrous metals	U118B	5	623940000
<b>For metal the &gt;Professional&lt; series shatter-proof, long useful life</b>				<b>BiM milled</b>			
Wavy-set, milled 	BiM	6"	12	Sheet-steel, 1/8"-1/4" in., sandwich materials up to 4" in.	T718BF	5	623604000
Wavy-set, milled 	BiM	2 1/4"	24	Sheet-steel, , 3/64"-1/8" in., non-ferrous metals	T118AF	5	623971000
Wavy-set, milled 	BiM	2 1/4"	12	Sheet-steel, 1/8"-1/4" in., non-ferrous metals	T118BF	5	623973000
<b>For metal the &gt;Pionier&lt; series quick, clean cuts in materials of all thicknesses</b>				<b>HSS milled</b>			
Side-set, milled 	HSS	3"	progres- sive	Universal blade for thick / thin sheet-steel, 1/16"-3/8" in., non-ferrous metals up to 1 3/16" in.	T123X	5	623676000

Jig Saw Blades - bayonet fitting (continued)

Saw-blade/Type	Material	Cutting Edge	Teeth Per Inch	Uses	Corr. Bosch Type	Pcs./ Pk.	Order No.
<b>For Aluminum and non-ferrous metals the &gt;Expert&lt; series</b>				<b>Aluminum HSS/BiM</b>			
Side-set, milled 	HSS	3"	8	Aluminum, 1/8"-9/16" in., non-ferrous metals, 1/6"-3/4" in., plastics for quick cuts	T127D	5	623639000
<b>For plastics the &gt;Expert&lt; series</b>				<b>plastics HM ground</b>			
Ground 	HM	3 1/2"	8	Glass-fibre-reinforced plastics, 7/32"-2 3/8" in.	T301CHM	3	623687000
<b>For plexiglass the &gt;Expert&lt; series</b>				<b>plexiglass HSS ground</b>			
Ground 	HSS	3"	12	Plexiglass, polycarbonate, 7/64"-3/4" in., non-ferrous metals, 7/64"-3/8" in.	T101A	5	623640000
<b>For ceramic materials the &gt;Expert&lt; series</b>				<b>ceramics HM grit</b>			
	HM grit	2"	Fine	Ceramics, glass, glass-fibre-reinforced plastics, cast-iron	T150 TC Coated	1	623658000

Reciprocating Saw Blades - with 1/2 inch universal fitting

Saw-blade/Type	Material	Length x Width x Thickness	Teeth Per Inch	Uses	Corr. Bosch Type	Pcs./ Pk.	Order No.
<b>For metal the &gt;Classic&lt; series</b>				<b>low-price and reliable HSS milled</b>			
Wavy-set, milled 	HSS	6" x 5/8" x .035 9" x 5/8" x .035	14 14	Sheets, 7-64"-5/16" in., sections, 3/8"-4" in.	S 918 B S 1122 BF	5	631130000 631494000
<b>For metal the &gt;Flexible&lt; series</b>				<b>shatter-proof, flexible BiM milled</b>			
Side-set, milled 	BiM	6" x 3/4" x .035	18	Sheets, 1/32"-1/8" in., pipes, sections, 1/32"-4" in.	S 922 EF	5	631454000
Side-set, milled 	BiM	9" x 3/4" x .035	18	Sheets, 1/16"-7/32" in., pipes, sections, 7/32"-7" in., flush cuts	S 1122 EF	5	631493000
Side-set, milled 	BiM	6" x 3/4" x .035	14	Sheets, 1/8"-5/16" in., pipes, sections, 3/8"-4" in.	S 922 BF	5	631491000
Side-set, milled 	BiM	4" x 1/4" x .035	14	Sheets, 1/16"-1/4" in., curved cuts	S 422 BF	5	631990000
<b>For metal the &gt;Professional&lt; series</b>				<b>stable, precise, for really tough jobs BiM milled</b>			
Side-set, milled 	BiM	9" x 3/4" x .063	9	Sheets, 7/32"-3/8" in.; pipes, sections, 3/4"-7" in., ideal for pipe-cutting equipment, for demolition work	S 1120 CF	5	631993000
<b>For wood and metal the &gt;Flexible&lt; series</b>				<b>shatter-proof, flexible BiM milled</b>			
Side-set, milled 	BiM	6" x 3/4" x .035 8" x 3/4" x .050	10-14 PROG	Wood, wood with nails or metal inserts 7/32"-4" in., sheets, pipes, sections, 1/8"-3/8" in., plastics, 1/8"-4" in.	S 922 VF S 3456 XF	5	631492000 631915000
Side-set, milled 	BiM	12" x 3/4" x .035	10-14	Wood, wood with nails or metal inserts 7/32"-10" in., sheets, pipes, sections, 1/8"-3/8" in., plastics, 1/8"-10" in.	S 1222 VF	5	631407000
<b>For wood and metal the &gt;Professional&lt; series</b>				<b>quick, stable, for really tough jobs BiM milled</b>			
Side-set, milled 	BiM	6" x 3/4" x .063	6	Wood, wood with nails or metal inserts 3/8"-4" in., plastics, reconstruction work demolition and reconstruction work	S 610 DF	5	631925000
Side-set, milled 	BiM	9" x 3/4" x .063 10" x 3/4" x .060	6 5	Wood, wood with nails or metal inserts 3/8"-4" in., plastics, demolition and reconstruction work	S 1110 DF S 1531 L	5	631926000 631488000
<b>For wood (even with nails) the &gt;Flexible&lt; series</b>				<b>stable, quick BiM milled</b>			
Side-set, milled 	BiM	12" x 3/4" x .050	5-8	Wood (even with nails), plastics, chip-board, 3/8"-10" in.	S 1411 VF	5	631987000
Side-set, milled 	BiM	12" x 3/4" x .050	6	Wood (even with nails), plastics, chip-board, 3/8"-10" in.	S 1344 D	5	631472000
Side-set, milled 	BiM	9" x 3/4" x .050	5-8	Wood (even with nails), plastics, chip-board, 3/8"-8" in.	S 1111 VF	5	631986000
Side-set, milled 	BiM	6" x 3/4" x .050	6	Wood (even with nails), plastics, chip-board, 3/8"-4" in.	S 644 D	5	631470000
Side-set, milled 	BiM	6" x 3/4" x .050	5-8	Wood (even with nails), plastics, chip-board, 3/8"-4" in.	S 611 VF	5	631984000
<b>For special applications the &gt;Expert&lt; series</b>							
Side-set, carbide-tipped 	BiM	6" x 5/8" x .050	6	Plaster-board, 5/16"-4" in., for a really clean cut	S628DF	5	631907000



Cold forged from premium S2 tool steel, fully hardened and tempered for optimum hardness and toughness. G-60 screwdriver tooling fits better and lasts longer even when used on heat-treated and case hardened screws.

**Proper Bit Selection**

The most important factor when using screwdriver bits is proper fit. Using the correct point size reduces rounding and breaking of the bits.

**Why is hardness important?**

Bits are manufactured at various hardness to accommodate different screws and applications. For example medium hard bits are best suited for driving standard (soft) screws and extra hard bits are best for driving heat-treated or case hardened screws.



**Screwdriver Bits**

**1" Phillips Bits 1/4" Hex. Shank**



Overall Length	Point Size	Bits/Pkg.	Order No.
1"	P-1	25	678101000
1"	P-2	25	678102000
1"	P-2 reduced	25	678142000

**1" Square Recess Bits 1/4" Hex. Shank**



Overall Length	Point Size	Bits/Pkg.	Order No.
1"	R-0	25	678150000
1"	R-1	25	678151000
1"	R-2	25	678152000

**Phillips Recess Power Bits 1/4" Hex. Shank**





Overall Length	Point Size	Bits/Pkg.	Order No.
2"	P-1	10	678201000
2"	P-2	10	678202000
2"	P-3	10	678203000
3"	P-1	10	678301000
3"	P-2	10	678302000
4"	P-2	10	678402000

**Square Recess Power Bits 1/4" Hex. Shank**



Overall Length	Point Size	Bits/Pkg.	Order No.
2"	R-1	10	678251000
2"	R-2	10	678252000
3"	R-1	10	678351000
3"	R-2	10	678352000
4"	R-1	10	678451000
4"	R-2	10	678452000
6"	R-2	5	678652000

**Magnetic Bit Holders**

Extra powerful magnet holds screws firmly on tip. The Quick-Release bit holder holds and locks regular bits.	<b>Style</b>	<b>Overall Length</b>	<b>Qty/ Pack</b>	<b>Order No.</b>
	Universal	3"	1	678055000
	Quick-Release	3"	1	678056000

**Magnetic Nutsetters**

Precisely forged & carefully hardened alloy steel to drive more hexagon & sheet metal screws. Powerful permanent magnet holds screws firmly in place. Designed for even the most demanding jobs.

	<b>Overall Length</b>	<b>Hexagon Opening</b>	<b>Qty/ Pack</b>	<b>Order No.</b>
	1 5/8"	1/4"	5	678001000
	1 5/8"	5/16"	5	678002000
	1 3/4"	3/8"	5	678003000
	1 3/4"	7/16"	5	678004000
	2 9/16"	1/4"	5	678011000
	2 9/16"	5/16"	5	678012000
	2 9/16"	3/8"	5	678013000
2 9/16"	7/16"	5	678014000	

Bit Size	Phillips Bits	Square Recess Bits	Mag.Nutsetters 2 9/16" O/L	Bit Holder	Order No.
1" Insert Bits	P-1, P-2, P-2R	R-0, R-1, R-2, R-3	1/4" hex.	3" Quick-Release Magnetic Bit Holder 1/4" Shank	678953000
2" Power Bits	P-1, P-2, P-3	R-1, R-2, R-3	5/16" hex.		
4" Power Bits	P-2	R-2	3/8" hex.		
-	-	-	7/16" hex.		

**G60 Pro Installer's Kit**

Contains 20 selected bits. Offers the professional a complete assortment of insert bits, power bits and nutsetters. Comes in a sturdy plastic case.

**Bi-metal Hole Saws**

**ADVANTAGES**

- Teeth are made with hardened alloyed steel, includes 8% cobalt, which increases durability and maximizes life expectancy
- Quicker and more precise material removal
- Irregular tooth shape and spacing helps to minimize vibration
- For use in cast steel, grey cast iron, stainless steel, construction steel, aluminum, bronze, copper, PVC, acrylic, glass and wood

Order No.	Diameter (inches)
625160000	9/16"
625161000	5/8"
625162000	11/16"
625163000	3/4"
625165000	13/16"
625166000	7/8"
625167000	15/16"
625168000	1"
625169000	1 1/16"
625170000	1 1/8"
625171000	1 13/16"
625172000	1 1/4"
625173000	1 5/16"
625174000	1 3/8"
625175000	1 7/16"
625176000	1 1/2"
625177000	1 9/16"
625178000	1 5/8"
625179000	1 11/16"
625180000	1 3/4"
625182000	1 7/8"
625184000	2"
625186000	2 1/8"

Order No.	Diameter (inches)
625188000	2 1/4"
625189000	2 5/16"
625190000	2 3/8"
625191000	2 1/2"
625192000	2 9/16"
625193000	2 5/8"
625195000	2 3/4"
625196000	2 7/8"
625197000	3"
625198000	3 1/8"
625199000	3 1/4"
625200000	3 3/8"
625201000	3 1/2"
625202000	3 5/8"
625204000	3 7/8"
625205000	4"
625206000	4 1/8"
625207000	4 1/4"
625208000	4 3/8"
625209000	4 1/2"
625210000	4 3/4"
625211000	5"
625213000	5 1/2"
625214000	6"

**Mandrels**

625215000 9/16" to 1-3/16" adaptor



625216000 1-1/4" to 6" adaptor



**Bi-metal Hole Saw Kits**

**625434000 Bi-metal hole saw set (8 pieces)**

Carrying case contains bi-metal hole saws: 7/8", 1-1/8", 1-3/8", 1-3/4", 2" and 2-1/2".

For hole saws 9/16" to 1-13/16" use the 9/16" to 1-3/16" adaptor (625215000)

For hole saws 1-1/4" to 6" use the 1-1/4" to 6" adaptor (625216000)



**625435000 Bi-metal hole saw set (11 pieces)**

Carrying case contains bi-metal hole saws: 7/8", 1-1/8", 1-3/8", 1-3/4", 2" and 2-1/2".

For hole saws 9/16" to 1-13/16" use the 9/16" to 1-3/16" adaptor (625215000)

For hole saws 1-1/4" to 6" use the 1-1/4" to 6" adaptor (625216000)









02



## Angle Grinders

- Patented mechanical **safety slip clutch** reduces the risk of grinder kickback and wheel breakage
- **Safety brake** versions stop wheels in as little as 1 second
- **Electronic "cruise control" and performance monitoring** increase productivity and service life up to 100% over competitive tools
- **Patented flathead grinders** access acute angles as tight as 39°
- **Anti-vibration systems** reduce hand/arm vibrations by 60%, extending the wheel and tool life up to 100%

# Angle Grinder Key Features



LEARN MORE!

**MADE IN GERMANY**

**LONGLIFE MOTOR**

**LongLife Motor with Winding Protection Grid:**  
 ■ for quicker material removal and longer service life



**Cruise Control Electronics**



**S-Automatic Safety Clutch:**

- Increased safety, predictable handling.
- Clutch helps to protect operator from kick back



**"Quick" Toolless Wheel Change System:**

- Metabo quick wheel change system allows for safe, tool-free wheel change



**Rear Air Intake:**

- Maximizes flow of cooling air, for increased protection from overheating and overload

**Drop Secure Ring / Rear Tether Attachment Point**



Tether shown not included



**Auto-balance System:**

- 100% greater wheel life
- 100% greater tool life
- 50% less vibrations, reduces likelihood of work related disorders



**Paddle Switch with Deadman Function:**

- Ergonomic non-slip switch promotes safer grinder use



**For increased control, better ergonomics (rat-tail design available)**

**MVT Vibratex Handle:**

- Reduces vibration by up to 60% compared to other handles. The risk of "White Finger Syndrome" caused by vibration exposure over the workers' lifespan is reduced considerably!



**Brake Technology:**

- Stops grinding wheel in under 2 seconds
- Stops thin cutting wheels in under 1 second
- Greatly reduces the likelihood of injury from kickback or loss of control



Note: features depend on specific model



**Rear vents:**

Optimizes air flow for cooler operation



**Gear housing can be rotated at 90° steps:**  
 For left-handed operation or for cutting



**Multi-position safety handle #627362000**

Infinite adjustment of the side handle for ergonomic, low-fatigue working (e.g. for cutting jobs, left-handed users or in confined spaces)

# Angle Grinder Features Reference Guide



## Safety

## Productivity

### Metabo S-Automatic Mechanical Safety Clutch



- Increased safety, predictable handling
- Clutch helps to prevent kickback and wheel shattering

LEARN MORE!



### LongLife Motor with Winding Protection Grid



- Less heat, higher overload capacity, extends motor life by 5 times

### Brake Technology



- Stops thin cutting wheels in under 1 sec
- Stops grinding wheels in under 2 sec
- Greatly reduces the likelihood of injury from kickback or loss of control



### M-Quick Toolless Wheel Change System



- Metabo quick wheel change system allows for safe, tool-free wheel change



### Auto-Balance System



- 100% greater wheel life
- 100% greater tool life
- 50% less vibration reduces likelihood of work related disorders



### Electronics



- Soft start for longer tool life



Armature speed



Amp load

### Electronics



- Protection against accidental restart

### Metabo VibraTech (MVT) Handle



- Reduces vibration by up to 60% compared to other handles

### Non-Locking Paddle Switch



- Ergonomic switch promotes safer grinder use

### Drop Secure



A 6.5 lbs. angle grinder dropped from 30 ft. can strike with over 600 lbs. of deadly force!

- Secure tethering eye at the rear of the tool for attachment to a lanyard



### Vario Tacho-Constamatic (VTC) Electronics

- VTC full wave electronics: work at customized speeds to suit the application material and speeds that remain almost constant, even under load

### Tacho-Constamatic (TC) Electronics

- TC full wave electronics: highest productivity by maintaining no load speed through the full load range for maximized productivity

# 4 1/2"-5" ANGLE GRINDERS



**W 750-115**  
4 1/2" Angle Grinder



**WP 850-125**  
4 1/2"-5" Angle Grinder w/  
Non-locking Paddle Switch






**W 850-125**  
4 1/2"-5"  
Angle Grinder



**W 11-125 Set**  
4 1/2"-5" Angle Grinder

**NEW**

Model	W 750-115 603604420	W 850-125 603608420	WP 850-125 603610420	W 11-125 Set 603622850
<b>Key Features</b>				 
Maximum wheel diameter	4 1/2"	4 1/2"-5"	4 1/2"-5"	4 1/2"-5"
Amps	7.0	8.0	8.0	11.0
Rated input watts	750	850	850	1100
No-load speed (RPM)	11,000	11,500	11,500	11,000
Switch Type	Lock-on slide	Lock-on slide	Non-locking paddle	Lock-on slide
Motor	<b>Heavy Duty</b>	<b>Heavy Duty</b>	<b>Heavy Duty</b>	LongLife
AC/DC capability	AC	AC	AC	AC/DC
Metabo safety slip clutch				•
Rotatable gear housing				•
Burst-proof guard	•	•	•	w/ 7 stops
Ergonomic side handle	•	•	•	•
Auto-stop carbon brushes	•	•	•	•
Winding protection grid				•
<b>Standard equipment:</b>				
Type 27 wheel guard	339209570	339204770	339204770	339204500
Side handle	314000540	314000540	314000540	314000540
Inner flange	341031290	341031290	341031290	341031290
Locking nut	341101480	341101480	341101480	341101480
Spanner wrench	623934000	623934000	623934000	623934000
Carrying case				344454180
Diamond wheel				624306000
5" Clip-on Dust Extraction Shroud				630401000
<b>Optional equipment:</b>				
Steel type 1 cutting guard	631189000			US339203030
Quick-clip on type 1 cutting guard		630352000	630352000	630352000



**W 11-125 Quick**  
4 1/2"-5" Angle Grinder



**WP 13-125 Quick**  
4 1/2"-5" Angle Grinder with  
Non-locking Paddle Switch



**WP 11-125 Quick**  
4 1/2"-5" Angle Grinder  
with Non-locking Paddle Switch






**WPB 18 LTX BL 115**  
4 1/2" Brushless Paddle  
Switch Angle Grinder with  
Brake

Model	W 11-125 Quick 603623420	WP 11-125 Quick 603624420	WP 13-125 Quick 603629420	WPB 18 LTX BL 115 613074620
<b>5.5Ah Kit:</b> ASC30-36 Chgr + 2 LiHD 5.5 Ah Batteries				
<b>Bare Tool:</b>				613074860
<b>Key Features</b>	 	  	   	   
Maximum wheel diameter	4 1/2"-5"	4 1/2"-5"	4 1/2" - 5"	4 1/2"
Amps	11.0	11.0	12.0	18V
Rated input watts	1100	1100	1,250	
No-load speed (RPM)	11,000	11,000	11,000	9,000
Switch Type	Lock-on slide	Lock-on slide	Non-Locking Paddle	Non-Locking Paddle
Motor	LongLife	LongLife	LongLife	Brushless
AC/DC capability	AC/DC	AC/DC	AC/DC	18V DC
Safety brake				•
Metabo safety slip clutch	•	•	•	
Quick wheel change system	•	•	•	•
Electronic: Power interruption protection, clutch, overload protection				•
Rotatable gear housing	•	•	•	•
Burst-proof guard	w/ 7 stops	w/ 7 stops	w/ 7 stops	w/ 7 stops
Side handle	Vibration dampened	Vibration dampened	MVT Vibratex	Vibration dampened
Auto-stop carbon brushes	•	•	•	•
Winding protection grid	•	•	•	•
<b>Standard equipment:</b>				
Charger				627046000 (ASC 55)
2 - 18V 5.5 Ah LiHD ext. batteries*				625368000
Type 27 wheel guard	339204500	339204500	339204500	339203480
Side handle	316046590	316046590	314000970	316046590
Inner flange	341031290	341031290	341031290	341031290
Locking nut	316055450	316055450	316055450	316062590
Spanner wrench				623934000
Carrying case				Kit only
<b>Optional equipment:</b>				
Quick-clip on type 1 cutting guard	630352000	630352000	630352000	630351000
Dust filter	630835000	630792000	630792000	313062620
Multiple position side handle bar	627362000	627362000	627362000	

# 4 1/2"-5" ANGLE GRINDERS



Model	W 1100-125 603614420	WP 1100-125 603612420	W 13-125 Quick 603627420
<b>Key Features</b>			  
Maximum wheel diameter	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"
Amps	11.0	11.0	12.0
Rated input watts	1,100	1,100	1,250
No-load speed (RPM)	12,000	12,000	10,000
Switch Type	Lock-on slide	Non-locking paddle	Lock-on slide
Motor	<b>Heavy Duty</b>	<b>Heavy Duty</b>	LongLife
AC/DC capability	AC/DC	AC/DC	AC/DC
Metabo safety slip clutch			•
Quick wheel change system			•
Rotatable gear housing	•	•	•
Burst-proof guard	•	•	w/ 7 stops
Side handle	Ergonomic	Ergonomic	MVT Vibratech
Auto-stop carbon brushes	•	•	•
Winding protection grid			•
<b>Standard equipment:</b>			
Type 27 wheel guard	339203960	339203960	339204500
Side handle	314000540	314000540	314000970
Inner flange	341031290	341031290	341031290
Locking nut	341101480	341101480	316055450
Spanner wrench	623934000	623934000	
<b>Optional equipment:</b>			
Type 1 cutting guard (steel)	US339203040	US339203040	US339203040
Quick-clip on type 1 cutting guard	630352000	630352000	630352000
Dust filter			630709000
Multiple position side handle bar			627362000



**WPB 13-125 Quick DS**  
4 1/2" - 5" Angle Grinder  
with Non-locking Paddle  
Switch and Brake



**WEPBA 17-125 Quick DS**  
Electronic 4 1/2" - 5" Angle  
Grinder with Non-locking  
Paddle Switch, Brake,  
Auto-balance  
and Drop Secure



**WEP 15-125 Quick**  
4 1/2" - 5" Angle Grinder  
with Non-locking Paddle Switch

Model	WPB 13-125 Quick DS 600437420	WEP 15-125 Quick 600476420	WEPBA 17-125 Quick DS 600549420
<b>Key Features</b>			
Maximum wheel diameter	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"
Amps	12.0	13.5	14.5
Rated input watts	1,250	1,550	1,700
No-load speed (RPM)	11,000	11,000	11,000
Switch Type	Non-locking paddle	Non-locking paddle	Non-locking paddle
Motor	LongLife	LongLife	LongLife
AC/DC capability	AC/DC	AC	AC
Mechanical brake technology	•		•
<b>Drop secure tethering point</b>	•		•
Auto-balance vibration control			•
Metabo safety slip clutch	•	•	•
Quick wheel change system	•	•	•
Electronic features:		•	•
Electronic speed stabilization		TC	TC
Power interruption protection		•	•
Soft start feature		•	•
Overload protection w/ LED		•	•
Rotatable gear housing	•	•	•
Burst-proof guard w/ 7 stops	•	•	•
Side handle	MVT Vibratex	MVT Vibratex	MVT Vibratex
Auto-stop carbon brushes	•	•	•
Winding protection grid	•	•	•
<b>Standard equipment:</b>			
Charger			627046000 (ASC 55)
Type 27 wheel guard	339204500	339204500	339204500
MVT Vibratex side handle	314000970	314000970	314000970
Inner flange	341031290	341031290	
Locking nut	316055450	316055450	316055450
Spanner wrench			
<b>Optional equipment:</b>			
Type 1 cutting guard (steel)	US339203040	US339203040	US339203040
Quick-clip on type 1 cutting guard	630352000	630352000	630352000
Dust filter	630792000	630792000	630792000
Multiple position side handle bar	627362000	627362000	627362000

# 4 1/2"-5" RAT TAIL GRINDERS



**WP 1200-125 RT**  
5" Angle Grinder



**WE 17-125 Quick RT**  
5" Angle Grinder



**WEV 1500-125 RT**  
5" Variable Speed Angle  
Grinder



**WEPBA 17-125 Quick RT DS**  
5" Angle Grinder



Model # (lock-on trigger)	WP 1200-125 RT 601240420 US601240762	WEV 1500-125 RT 601243420	WE 17-125 Quick RT 601086420	WEPBA 17-125 Quick RT DS 600605420
<b>Key Features</b>			 	    
Maximum wheel diameter	4 1/2" - 5"	4 1/2" - 5"	4 1/2"-5"	4 1/2"-5"
Amps	10.2	13.2	14.6	14.5
Rated input watts	1,200	1,500	1,700	1,700
No-load speed (RPM)	11,000	3,500-11,000	10,000	10,000
Switch Type	Depends on model	Locking trigger	Locking trigger	Non-locking trigger
Motor	<b>Heavy Duty</b>	<b>Heavy Duty</b>	LongLife	LongLife
AC/DC capability	AC/DC	AC	AC	AC
Mechanical brake technology				•
<b>Drop secure tethering point</b>				•
Auto-balance vibration control				•
Metabo safety slip clutch			•	•
Electronic features:				
Speed stabilization		VTC	TC	TC
Soft start feature		•	•	•
Overload protection		•	•	•
Electronic clutch		•		
Ergonomic rat tail design	•	•	•	•
Tool-less adjustable burst-proof guard	•	•	w/ 7 stops	w/ 7 stops
Side handle	Vibration dampened	Vibration dampened	MVT Vibrattech	MVT Vibrattech
Auto-stop carbon brushes	•	•	•	•
<b>Standard equipment:</b>				
Type 27 wheel guard	339203490	339203490	339200450	339200450
Side handle	316046590	316046590	314000970	314000970
Inner flange	341031290	341031290	341031290	341031290
Locking nut	341101480	341101480	316055450	316055450
Spanner wrench	623934000	623934000		
<b>Optional equipment:</b>				
Filter			630719000	630719000
Type 1 cutting guard (steel)			US339203040	US339203040
Quick-clip on type 1 cutting guard	630352000	630352000	630352000	630352000



# 6" - 7" RAT TAIL GRINDERS



**WE 1500-150 RT**  
6" Angle Grinder



**WEP 1500-150 RT**  
6" Angle Grinder



**WEPBA 17-150 Quick RT DS**  
6" Angle Grinder



**WEP 17-150 Quick RT**  
6" Angle Grinder



**WEPB 19-180 RT DS**  
7" Angle Grinder



**Model # (lock-on trigger)  
# (non locking trigger)**

**WE 1500-150 RT**  
601242420  
601244420  
WEP 1500-150 RT

**WEP 17-150 Quick RT**  
601078420

**WEPBA 17-150 Quick RT DS**  
600606420

**WEPB 19-180 RT DS**  
601096420

**Key Features**



Model # (lock-on trigger) # (non locking trigger)	WE 1500-150 RT 601242420 601244420 WEP 1500-150 RT	WEP 17-150 Quick RT 601078420	WEPBA 17-150 Quick RT DS 600606420	WEPB 19-180 RT DS 601096420
<b>Key Features</b>				
Maximum wheel diameter	6"	6"	6"	7"
Amps	13.2	14.6	14.5	15.0
Rated input watts	1,500	1,750	1,750	1,900
No-load speed (RPM)	9,600	9,600	9,600	8,200
Switch Type	Depends on model	Non-Locking	Non-Locking	Non-Locking
Motor	<b>Heavy Duty</b>	LongLife	LongLife	LongLife
AC/DC capability	AC	AC	AC	AC
Mechanical brake technology			•	•
<b>Drop secure tethering point</b>			•	•
Auto-balance vibration control			•	•
Metabo safety slip clutch		•	•	•
Electronic features:				
Speed stabilization	TC	TC	TC	TC
Soft start feature	•	•	•	•
Overload protection	•	•	•	•
Electronic clutch	•	•	•	•
Ergonomic rat tail design	•	•	•	•
Tool-less adjustable burst-proof guard	•	w/ 7 stops	w/ 7 stops	w/ 7 stops
Side handle	Vibration dampened	MVT Vibrattech	MVT Vibrattech	MVT Vibrattech
Auto-stop carbon brushes	•	•	•	•
<b>Standard equipment:</b>				
Type 27 wheel guard	339204450	339204510	339204510	339204790
Side handle	316046590	314000970	314000970	314000970
Inner flange	341031290	341031290	341031290	
Locking nut	341101480	316055450	316055450	
Spanner wrench	623934000			
Wheel mounting kit for type 27 whls				316037200
Guard for non-bubbed wheels				339204780
<b>Optional equipment:</b>				
Type 1 cutting guard (steel)	630353000	US339203050	US339203050	630383000
Quick-clip on type 1 cutting guard		630353000	630353000	
Type 27 guard flange kit for non-hubbed wheels				655199000
Multi-position Handle		627362000	627362000	627362000

# 6" ANGLE GRINDERS



Included:  
4 1/2" and 6" wheel  
guards, for use with  
all your applications

**WPB 18 LTX BL 150**  
6" Brushless Paddle  
Switch Angle Grinder  
with Brake



**NEW**

**WP 13-150 Quick**  
6" Angle Grinder  
with Non-locking Paddle Switch



**NEW**

**W 13-150 Quick**  
6" Angle Grinder



**NEW**

**WPB 13-150 Quick DS**  
6" Angle Grinder  
with Non-locking  
Paddle Switch, Brake  
and Drop Secure



Model	WPB 18 LTX BL 150	W 13-150 Quick 603632420	WP 13-150 Quick 603633420	WPB 13-150 Quick DS 603645420
<b>8.0Ah Kit:</b> ASC30-36 Chgr + 2 LiHD 8.0 Ah Batteries <b>Bare Tool:</b>	<b>613076640</b> <b>613076860</b>			
<b>Key Features</b>				
Maximum wheel diameter	6"	6"	6"	6"
Amps		12.0	12.0	12.0
Rated input watts		1,250	1,250	1,250
No-load speed (RPM)	9,000	10,000	10,000	10,000
Switch Type	Non-locking paddle	Lock-on slide	Non-locking paddle	Non-locking paddle
Motor	Brushless	LongLife	LongLife	LongLife
AC/DC capability	18V DC	AC/DC	AC/DC	AC/DC
Safety brake	•			•
Mechanical brake technology				•
<b>Drop secure tethering point</b>				•
Metabo safety slip clutch		•	•	•
Quick wheel change system	•	•	•	•
Electronic: Power interruption protection, clutch, overload protection	•			
Rotatable gear housing	Rotatable battery pack	•	•	•
Burst-proof guard	•	w/7 stops	w/7 stops	w/7 stops
Side handle	Vibration dampened	MVT Vibratex	MVT Vibratex	MVT Vibratex
Auto-stop carbon brushes		•	•	•
Winding protection grid		•	•	•
<b>Standard equipment:</b>				
2 - 18V 8.0 Ah LiHD ext. batteries*	625369000			
Charger	627046000 (ASC 55)			
Type 27 wheel guard - 4 1/2" and 6"	339204450 / 339204490	339204510	339204510	339204510
Side handle	316046590	314000970	314000970	314000970
Inner flange	341031290	341031290	341031290	341031290
Locking nut	341101480	316055450	316055450	316055450
Carrying case	Kit only			
Spanner wrench	623934000			
<b>Optional equipment:</b>				
Quick-clip on type 1 cutting guard	630353000	630353000	630353000	630353000
Dust filter	316062620	630709000	630792000	630792000
Multiple position side handle bar		627362000	627362000	627362000



**WE 15-150 Quick**  
Electronic 6" Angle Grinder



**WEP 17-150 Quick**  
Electronic 6" Angle Grinder with Non-locking Paddle Switch





















**WEP 15-150 Quick**  
Electronic 6" Angle Grinder with Non-locking Paddle Switch



**WEPBA 17-150 Quick DS**  
Electronic 6" Angle Grinder with Non-locking Paddle Switch, Brake, Auto-balance and Drop Secure



Model	WE 15-150 Quick 600464420	WEP 15-150 Quick 600488420	WEP 17-150 Quick 600507420	WEPBA 17-150 Quick DS 600553420
<b>Key Features</b>	  	   	   	      
Maximum wheel diameter	6"	6"	6"	6"
Amps	13.5	13.5	14.5	14.5
Rated input watts	1,550	1,550	1,700	1,700
No-load speed (RPM)	9,600	9,600	9,600	9,600
Switch type	Lock-on slide	Non-locking paddle	Non-locking paddle	Non-locking paddle
Motor	LongLife	LongLife	LongLife	LongLife
AC/DC capability	AC	AC	AC	AC
Mechanical brake technology				•
<b>Drop secure tethering point</b>				•
Metabo safety slip clutch	•	•	•	•
Quick wheel change system	•	•	•	•
Electronic features:				
Electronic speed stabilization	TC	TC	TC	TC
Power interruption protection	•	•	•	•
Soft start feature	•	•	•	•
Overload protection w/ LED	•	•	•	•
Rotatable gear housing	•	•	•	•
Burst-proof guard w/ 7 stops	•	•	•	•
Side handle	MVT Vibratech	MVT Vibratech	MVT Vibratech	MVT Vibratech
Auto-stop carbon brushes	•	•	•	•
Winding protection grid	•	•	•	•
<b>Standard equipment:</b>				
Type 27 wheel guard	339204510	339204510	339204510	339204510
Quick-clip on type 1 cutting guard	630353000	630353000	630353000	630353000
Side handle	314000970	314000970	314000970	314000970
Inner flange	341031290	341031290	341031290	341031290
Locking nut	316055450	316055450	316055450	316055450
<b>Optional equipment:</b>				
Steel type 1 guard	US339203050	US339203050	US339203050	US339203050
Dust filter	630709000	630792000	630792000	630792000
Multiple position side handle bar	627362000	627362000	627362000	627362000

## 4 1/2"-6" VARIABLE SPEED ANGLE GRINDERS



**WEV 11-125**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder



**WEV 15-125 HT**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder















**WEV 1500-125 RT**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder



**WEV 15-125 Quick**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder



**WEV 15-150 HT**  
Electronic Variable Speed  
6" Angle Grinder

Model	WEV 11-125 603625420	WEV 15-125 Quick 600468420	WEV 15-125 HT 600562420	WEV 1500-125 RT 601243420	WEV 15-150 HT 600563420
<b>Key Features</b>	 	   	 	 	 
Maximum wheel diameter	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"	6"
Amps	11.0	13.5	13.5	13.2	13.5
Rated input watts	1,000	1,550	1,550	1,500	1,550
No-load speed (RPM)	2,800-10,500	2,800-11,000	2,800-9,600	3,500-11,000	2,000-7,600
Switch Type	Lock-on slide	Lock-on slide	Lock-on slide	Locking trigger	Lock-on slide
Motor	LongLife	LongLife	LongLife	<b>Heavy Duty</b>	LongLife
Metabo safety slip clutch	•	•	•	•	•
Quick wheel change system		•			
Electronics features:					
Speed stabilization	VC	VTC	VTC	VTC	VTC
Power interruption protection	•	•	•	•	•
Soft start feature	•	•	•	•	•
Overload protection w/ LED	•	•	•	•	•
Rotatable gear housing	•	•	•	•	•
Burst-proof guard w/ 7 stops	•	•	•	•	•
Side handle	Vibration dampened	MVT Vibratex	Vibration dampened	Vibration dampened	Vibration dampened
Auto-stop carbon brushes	•	•	•	•	•
Winding protection grid	•	•	•	•	•
<b>Standard equipment:</b>					
Type 27 wheel guard	339204500	339204500	339204500	339203970	339204510
Side handle	316046590	314000970	316046590	316046590	316046590
Inner flange	341031290	341031290	341031290	341031290	341031290
Locking nut	341101480	316055450	341101480	341101480	341101480
Spanner wrench	623934000		623934000	623934000	623934000
<b>Optional equipment:</b>					
Type 1 cutting guard (steel)	US339203040	US339203040	US339203040		US339203050
Quick-clip on type 1 cutting guard	630352000	630352000	630352000	630352000	630353000
Dust filter		630709000	630709000		630709000

## DUSTLESS SHROUDS FOR MASONRY GRINDING AND CUTTING



**626732000**  
5" Convertible shroud for concrete grinding. Fits all Metabo W9, 12, 15, 17, 19 series grinders



Dustless convertible shroud for concrete surface prep  
**655154000** For all current large angle grinders W 24 / W 26  
**655153000** For all current small angle grinders W 9 / W 12 / W 15 / W 17



**630401000**  
5" Clip-on Dustless Cutting Shroud



**626731000**  
CED 125 Plus Anti-Static Shroud for concrete cutting with guide rail



**628216000**  
Dustless Tuck Point Guard Fits small angle grinders, W 9/W 12/W 15/W 17



**US626752000**  
CED 230  
9" Dustless concrete cutting shroud fits Metabo 9" large grinders. **Professional series only**

## GUARDS



Quick-clip on type 1 cutting guard  
**630351000** - 4 1/2"  
**630352000** - 5"  
**630353000** - 6"  
Fits W9, W/WP/WPB12, W1200, WE/WEP/WEPBA15, WEV1500, WE/WEP/WEPBA17 series grinders



Type 1 steel cut-off wheel guard  
4 1/2" **US339203030**  
5" **US339203040**  
6" **US339203050**  
7" **630383000** (For WEPB 19 & WPB 36)  
7" **630356000** (For W 24 MVT series)  
9" **630357000** (For W 24 / W 26 MVT series)  
9" **630363000** (For WPB 36 only)  
(Does not fit W 750/W 850/W 1100/W 1200/W 1500)



Cup wheel guard and flange for mounting 4" - 6" Type 11 cup wheels on 7" - 9" angle grinders  
Guards: **655174000** - 4" 5/8", **655178000** - 6".  
Mounting flange **US90357006**



**623276000** Cup wheel guard for mounting 3 1/8" Type 6 cup wheels on 4 1/2" - 6" angle grinders  
**Professional series only**

## ADAPTOR KITS AND SPANNER WRENCH



**316064350**  
For mounting non-hubbed 7" and 9" Type 27 wheels on all Metabo large angle grinders  
**655039000** Flange kit for competitive 7" and 9" angle grinders  
**655052000** replacement nut replacement nut for 655039000  
**316037200** Flange kit for 4-1/2" - 6" non-hubbed type 27 wheels



**US655038000** Adaptor kit for diamond blades on 7" - 9" grinders



**623934000** Straight  
**623910000** Offset



**630327000** hand guard for use on all polishers, angle sanders and grinders

## HANDLES



**627362000** Multiple Position Bar  
The 180 degree bar allows for infinite adjustment of the side handle



**US630342001** Loop handle for 7" - 9" angle sander & grinders



**623262000** Loop handle for small grinders  
Fits W/WP9, WE/WEV/WEV10, W/WP/WPB12, WE/WEV/WEF/WEPF/WEPBF15, WEP/WEPBA17 grinders



**MVT Vibratex Handle**  
Reduces vibration by up to 60% compared to other handles. The risk of "White Finger Syndrome" caused by vibration exposure over the workers' lifespan is reduced considerably!

## BACKING PADS



Flexible backing pads for using abrasive discs on angle sanders and grinders.  
**623279000** - 4 1/2" w/ M14-2.0 nut  
**623283000** - 4 1/2" w/ 5/8-11 nut  
**623284000** - 5" w/ 5/8-11 nut  
**623281000** - 7" w/ 5/8-11 nut  
**623282000** - 9" w/ 5/8-11 nut


## DUST PROTECTION FILTERS



**630835000**  
Non-paddle switch models



**630792000**  
Lock-on switch models



**630709000**  
Paddle switch models



**630719000**  
Rat-tail models

Fits W12-XXX through WEPBA17-XXX grinders

# 7"-9" LARGE ANGLE GRINDERS



**W 2200-180**  
7" Angle Grinder

**W 24-180 MVT**  
7" Angle Grinder

**WEPB 24-180 MVT**  
7" Electronic Angle Grinder  
with Brake

**WPB 36-18 LTX BL 230**  
9" Cordless Angle Grinder

**Compact 7" Rat Tail WEPB 19-180 RT DS**  
See page 49

**18 V + 18 V = 36 V**

**Model**  
# (lock-on trigger)  
# (non-locking deadman switch)

**W 2200-180 (7")**  
606434420  
US606434760

**W 24-180 MVT**  
606466420  
US606466760  
606466460  
(Canada)

**WEPB 24-180 MVT**  
606478420

**WPB 36-18 LTX BL 230**  
613102860  
**Bare tool**  
(accepts 2 - 18V  
batteries)

**Key Features**

	W 2200-180 (7")	W 24-180 MVT	WEPB 24-180 MVT	WPB 36-18 LTX BL 230
Maximum wheel diameter	7"	7"	7"	9"
Amps	15	15	15	36V (2x 18V) LiHD
Rated input watts	2,200	2,400	2,400	2,400
No-load speed (RPM)	8,500	8,500	8,500	6,600
Switch Type	Depends on model	Depends on model	Non-locking paddle	Non-locking paddle
Motor	<b>Heavy Duty</b>	LongLife	LongLife	<b>Brushless</b>
AC/DC capability	AC/DC	AC/DC	AC/DC	36V DC
Mechanical brake			•	•
Safety brake				3 sec
Electronic features:				
Electronic clutch				•
Soft start			•	•
Power interruption protection			•	•
Overload protection w/ LED			•	•
Safety / pinch protection			•	•
<b>Safety lock to prevent accidental switching on of the tool</b>	•	•	•	•
Burst-proof guard	•	Tool-less	Tool-less	Tool-less
(3 position) side handle	Ergonomic	MVT Vibratech	MVT Vibratech	Anti-vibration
Twister 3-position rear handle for cutting/grinding		•	•	•
Auto-stop carbon brushes	•	•	•	
Winding protection grid		•	•	
Carrying case (standard)				•
<b>Standard equipment:</b>				
Type 27 wheel guard	316045010	316053530	316053530	314001470
Side handle	314000280	314000960	314000960	314000960
Inner flange				341031850
Locking nut				341101480
Spanner wrench				623934000
<b>Optional equipment:</b>				
Type 1 cutting guard	630386000	630356000	630356000	630363000 (9")
Type 1 cutting guard				630383000 (7")
Flange kit non-hubbed wheels	316064350	316064350	316064350	

# 7"-9" LARGE ANGLE GRINDERS

BRUSHLESS MOTOR



**W 2200-230**  
9" Angle Grinder

**W 24-230 MVT**  
9" Angle Grinder

**WEPB 24-230 MVT**  
9" Electronic Angle Grinder with Brake

**W 26-230 MVT**  
9" Angle Grinder

Model # (lock-on trigger) # (non-locking deadman switch)	W 2200-230 (9") 606435420 US606435760	W 24-230 MVT 606467420 US606467760 606467460 (Canada)	WEPB 24-230 MVT 606479420	W 26-230 MVT 606474420 US606474760
<b>Key Features</b>			  	
Maximum wheel diameter	9"	9"	9"	9"
Amps	15	15	15	15
Rated input watts	2,200	2,400	2,400	2,600
No-load speed (RPM)	6,600	6,600	6,600	6,600
Motor	<b>Heavy Duty</b>	LongLife	LongLife	LongLife
AC/DC capability	AC/DC	AC/DC	AC	AC/DC
Mechanical brake			•	
Electronic features:				
Soft start			•	
Overload protection w/ LED			•	
Safety cut out / pinch protection			•	
Burst-proof guard	•	Tool-less	Tool-less	Tool-less
(3 position) side handle	Ergonomic	MVT Vibratech	MVT Vibratech	MVT Vibratech
Twister 3-position rear handle for cutting/grinding		•	•	•
Auto-stop carbon brushes	•	•	•	•
Winding protection grid		•	•	•
<b>Standard equipment:</b>				
Type 27 wheel guard	316045000	316053510	316053510	339204010
Side handle	314000280	314000960	314000960	314000960
<b>Optional equipment:</b>				
Type 1 cutting guard	630387000	630357000	630357000	630357000
Flange kit non-hubbed wheels	316064350	316064350	316064350	316064350

## OPTIONAL EQUIPMENT



**US655038000** Adaptor kit for diamond blades on 7" - 9" grinders



Dustless convertible shroud for concrete surface prep  
**655154000** 7" shroud. For all current large angle grinders W 24 / W 26  
**655153000** 5" shroud. For all current small angle grinders W 9 / W 12 / W 15 / W 17



**US630342001** Loop handle for 7" - 9" angle sander & grinders



**US626752000**  
CED 230  
9" Dustless concrete cutting shroud fits Metabo 9" large grinders  
**Professional series only**




## Solutions for Tight Spaces

The patented gear drive allows for a very low profile head design that enables grinding in angles as small as 39°, and into narrow spaces as low as 2-5/8" high.

Ergonomic design reduces fatigue, even when working on weld joints in difficult positions.

Specifically designed abrasive accessories allow the flat head grinder to work faster, saving time and money.

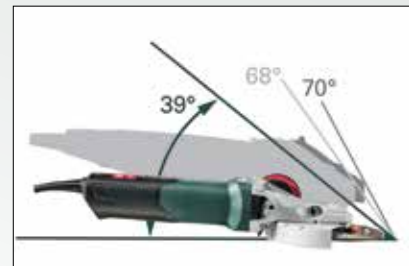

Patented gear design:  
the Metabo flat head angle grinder  
vs. standard angle grinders

### Applications

Metal cutting and grinding	Steel erection	Ship building/maintenance
Metal fabrication	Pipefitting	General metal industry
		General contractors

LEARN MORE!



## Unmatched Safety



Typical problem...Grinder doesn't reach



This solution violates safety standards



**Metabo flat head grinders are THE SOLUTION**

- **Safety Brake\*** stops wheels in under 2 seconds
- **Metabo Safety Clutch** reduces the risk of kickback during jams
- **Non-Locking Paddle Switch\*** (OSHA preferred and required by many safety regulations)
- **Metabo MVT Vibrattech Handle\*** reduces hand / arm vibration by up to 60%
- **Toolless, Adjustable Burst-Proof Guard with 7 Steps**

\*Available on select models



# 4 1/2" - 6" FLAT HEAD ANGLE GRINDERS

**4 1/2"-5" Flat Head Angle Grinder**  
WEF 9-125



**4 1/2"-5" Flat Head Paddle Switch Angle Grinder**  
WEPF 9-125



**4 1/2"-5" Flat Head Electronic Variable Speed High Torque Angle Grinder**  
WEVF 10-125 Quick INOX



**18V 4 1/2"-5" Flat Head Paddle Switch Cordless Angle Grinder**  
WPF 18 LTX 125



**6" Flat Head Electronic Angle Grinder**  
WEF 15-150 Quick



**6" Flat Head Paddle Switch Electronic Angle Grinder**  
WEPF 15-150 Quick



**6" Flat Head Paddle Switch Electronic Angle Grinder with Brake**  
WEPBF 15-150 Quick












Model:	WPF 18 LTX 125	WEF 9-125	WEPF 9-125	WEVF 10-125 Quick INOX	WEF 15-150 Quick	WEPF 15-150 Quick	WEPBF 15-150 Quick
Order No.: CORDED TOOL	----	613060420	613069420	613080420	613083420	613084420	613085420
Order No.: 8.0 LiHD Kit (ASC30-36 Charger + 2 LiHD 8.0 Ah Batteries)	US613070620	----	----	----	----	----	----
Order No.: BARE TOOL	613070860	----	----	----	----	----	----





Maximum wheel diameter	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"	6"	6"	6"
Amps	---	8.0	8.0	9.5	13.5	13.5	13.5
No-load speed (RPM)	8,000	10,000	10,000	2,000-7,600	9,600	9,600	9,600
Minimum clearance	43° / 2-5/8"	43° / 2-5/8"	43° / 2-5/8"	43° / 2-5/8"	39° / 2-5/8"	39° / 2-5/8"	39° / 2-5/8"
Mechanical brake							•
Non-locking paddle switch	•		•			•	•
Toolless wheel change	•			•	•	•	•
Motor	18V Cordless	LongLife	LongLife	LongLife	LongLife	LongLife	LongLife
Side handle	Vibration dampened	Vibration dampened	Vibration dampened	Vibration dampened	MVT VibraTech	MVT VibraTech	MVT VibraTech
Electronic features:							
Variable speed dial				•			
Speed stabilization		TC	TC	VC	TC	TC	TC
Power interruption protection	•	•	•	•	•	•	•
Soft start feature	•	•	•	•	•	•	•
Overload protection	w/LED	•	•	w/LED	w/LED	w/LED	w/LED
Electronic safety clutch	•	•	•	•	•	•	•
Rotatable gear housing	•	•	•	•	•	•	•
Toolless, adjustable burst-proof guard w/ 7 stops	•	•	•	•	•	•	•
<b>Standard Equipment</b>							
Wheel guard	316055590	316055590	316055590	316055590	339204600	339204600	339204600
Side handle	316046590	316046590	316046590	316046590	314000970	314000970	314000970
Inner flange	341031290	341031290	341031290	341031290	341031290	341031290	341031290
Locking nut	341101480	341101480	341101480	316064690	316064690	316064690	316064690
Spanner wrench	623934000	623934000	623934000	623934000			
<b>Optional Equipment</b>							
Type 1 cutting guard	630355000	630355000	630355000	630355000	630378000	630378000	630378000

# Increase Productivity with Metabo's Unique Flat Head Angle Grinder Accessories









SPECIALTY WHEELS	Grit	Size	Pcs./ Pkg.	Order No.
 <b>Flexiamant Super Convex CER</b> Extreme performance ceramic steel/stainless steel/heat sensitive materials <b>contaminant free</b>	P 60	5 x 7/8 6 x 7/8	10	626460000 626488000
	P 80	5 x 7/8 6 x 7/8	10	626461000 626489000
 <b>Flexiamant Super Convex ZK</b> High performance zirconia alumina steel/stainless steel <b>contaminant free</b>	P 40	5 x 7/8 6 x 7/8	10	626462000 626490000
	P 60	5 x 7/8 6 x 7/8	10	626463000 626491000
	P 80	5 x 7/8 6 x 7/8	10	626464000 626492000
 <b>Non-woven Fleece VKS ZK</b> Shapeable disc precise cleaning of weld seams steel/stainless steel	coarse	5 x 7/8	5	626482000
	medium	5 x 7/8	5	626483000

GRINDING WHEELS	Spec.	Size	Pcs./ Pkg.	Order No.
 <b>Original Long Life Grinding Wheel</b> Type 27 Steel	A 24 R	5 x 1/4 x 7/8 6 x 1/4 x 7/8	25	616308000 616319000
	A 36 M	5 x 1/4 x 7/8	25	616749000
 <b>Plus Grinding Wheel</b> Type 27 Aluminum	A 36 M	5 x 1/4 x 7/8	25	616749000
 <b>Plus-Z (Zirconia) Grinding Wheel</b> Type 27 Steel/Stainless Steel	ZA24T	6 x 1/4 x 7/8	25	616787000
 <b>M-Calibur (Ceramic)</b> Type 27 Steel/Stainless Steel	CA46U	5 x 1/4 x 7/8 6 x 1/4 x 7/8	10	US616291000 US616292000
	A 46 U	5 x 5/64 x 7/8 6 x 5/64 x 7/8	25	616501420 616502420
 <b>"Combinator" Type 27</b> Cutting & Grinding Steel/Stainless	A 46 U	5 x 5/64 x 7/8 6 x 5/64 x 7/8	25	616501420 616502420
 <b>Pipeline Wheel Type 27</b> Cutting/Notching/Grinding Steel/Stainless Steel	A 24 T	5 x 1/8 x 7/8 6 x 1/8 x 7/8	25	655287000 655285000
	.020 Carbon Steel	4-1/2 x 3/16 x 5/8-11 5 x .020 x 3/16 x 7/8 6 x .020 x 15/64 x 7/8	5 5 1	655228005 655229005 626816000

Other Accessories	Description	Details	Order No.
	<b>5" Type 1 Cutting Guard</b>		630355000 fits 5" WEPF9-125, WEF9-125
	<b>5" Type 1 Cutting Guard</b>	Comply with OSHA/ANSI B7.1 regulations	630372000 fits 5" WEVF10-125
	<b>6" Type 1 Cutting Guard</b>		630378000 fits all 6"
	<b>Multiple Position Handle</b>	Allows for infinite adjustment of the ergonomic side handle	627362000
	<b>Dust Protection Filter</b>	Protects motor components from harmful particles; aluminum, cloth from fiber discs and polishing fibers. Quick, tool free installation and removal	630719000 for use with slide switch grinders
			630792000 for use with paddle switch grinders

Not compatible with WEF9 / WEPF9-125

TYPE 1 CUTTING WHEELS	Spec.	Size	Pcs./ Pkg.	Order No.
 <b>Original Slicer</b> Fastest Cut/Flexible Steel/Stainless Steel	A 60 TZ	5 x .040 x 7/8 6 x .040 x 7/8	50	655334000 655339000
	A 60 XL	5 x .045 x 7/8 6 x .045 x 7/8	50	655335000 655344000
 <b>Original Long Life Slicer</b> Long Life/Tough Steel/Stainless Steel	A 60 XL	5 x .045 x 7/8 6 x .045 x 7/8	50	655335000 655344000
 <b>Slicer Plus</b> Aggressive/Cool Cutting Steel/Stainless Steel	A 60 TX	5 x .045 x 7/8 6 x .045 x 7/8	50	655993000 655998000
 <b>Super Slicer Heavy Duty</b> Contaminant Free, Steel/Stainless Steel, High Tensile Alloy	A60XP	5 x .045 x 7/8 6 x .045 x 7/8	50	655992000 655995000
 <b>M-Calibur (Ceramic)</b> Extreme Heavy Duty Ceramic, Contaminant Free, Steel/Stainless Steel, High Tensile Alloy	CA46U	6 x 1/16 x 7/8	25	US616287000
 <b>M-Calibur (Ceramic)</b> Extreme Heavy Duty Ceramic, Contaminant Free, Steel/Stainless Steel, High Tensile Alloy	CA46U	6 x .045 x 7/8	25	US616284000



**CORDED**  
**Variable Speed High Torque**  
**Dry Polisher**  
 PE 15-20 RT



**CORDED**  
**Variable Speed High Torque**  
**Dry Polisher**  
 PE 15-30



**PWE 11-100**  
**Variable Speed High**  
**Torque Wet Polisher**

Model	PE 15-20 RT 615200420	PE 15-30 615300420
Maximum pad diameter	7"	7"
Double insulated	•	•
Electronic features:		
Speed stabilization	Vario-tacho-constamatic (VTC)	
Power interruption protection	•	•
Overload protection	•	•
Soft start feature	•	•
Restart protection	•	•
Electronic winding temperature monitor with LED display	•	•
Winding protection grid	•	•
Planetary gearing	•	•
Variable speed controlled by adjusting dial	•	•
Auto-stop carbon brushes	•	•
No-load speed (RPM)	300-1,900 RPM	800-3,000 RPM
Amps	13	13
Rated input watts	1,500	1,550
Spindle thread	5/8"-11	5/8"-11
Carrying case		
<b>Standard equipment:</b>		
Side handle	314000540	
Loop handle		•
<b>Optional equipment:</b>		
5" soft backing pad	655141000	655141000
5" medium backing pad	655129000	655129000
5" hard backing pad	623298000	623298000
7" hard backing pad	655143000	655143000

Model	PWE 11-100 602050420
Vario tacho constamatic (VTC) electronics	•
Low profile aluminum die-cast gear housing	•
Housing cover to protect surfaces	•
Splash proof ventilation slots	•
Water supply through spindle	•
Motor	LongLife
Standard 1/2" quick connect	•
Ergonomic adjustable D-handle	•
Electronic winding temperature monitor with LED display	•
GFCI included for electrical safety	•
Auto-stop carbon brushes	•
Electronic soft start feature	•
Electronic speed stabilization	•
Maximum torque	34 inch lbs.
Backing pad size	4"-5"
No Load speed (RPM)	1,700-5,400
Amps	9.6
Rated input watts	1,100
Spindle thread	5/8"-11
<b>Standard equipment:</b>	Loop handle (343399690)
<b>Optional equipment:</b>	Tool Bag (657006000)



Backing pad not included on above tools





03



## Abrasives

- Abrasives engineered to maximize the performance of Metabo power tools
- Large selection of wheels to match your application
- Premium quality and performance abrasives, made in the US and Germany, exceeding all international standards for performance and safety

# Boost performance with

For Highest Performance, Productivity and Safety:

## HEAVY DUTY

Fast and reliable results

## SUPER DUTY

Longer life, improved productivity

## EXTREME DUTY

Unstoppable, unmatched productivity

Cutting

### Original Slicer

Fast, cool cutting, burr free

- Ferrous metal
- Steel / Stainless
- Bar stock
- Sheet metal

Aluminum Oxide



### Slicer Plus

Fast cutting, long life, most versatile

- Thicker sectional cuts
- Ferrous metal
- Steel / Stainless
- Hard alloys
- Heavy wall pipe
- Angle iron

Engineered Aluminum Oxide



### Ceramic M-Calibur

Extremely fast, longest life, toughest conditions, lowest total cost

- Hardened steel / Stainless
- Tough alloys
- High tensile alloys
- Hastalloys
- Inconels
- Titanium

Contaminant Free Pure Ceramic Alumina



Material Removal & Finishing

### Original Grinding

High removal rate

- Ferrous metal
- Steel / Stainless

Aluminum Oxide



### Plus-Z Grinding

Aggressive high stock removal rate, long life, cool grinding, most versatile

- Ferrous metal
- Steel / Stainless
- Heat sensitive material

Micro-Fracture Proprietary Blend



### Ceramic M-Calibur

Extreme removal, longest life, lowest total cost

- Hardened steel / Stainless
- Tough alloys
- High tensile alloys
- Hastalloys
- Inconels
- Titanium

Contaminant Free Ceramic Alumina



### Original Flapper

Fast stock removal, one step blending and finishing

- Steel / Stainless

Contaminant Free



### Flapper Plus

Aggressive stock removal, long life, most versatile, one step blending and finishing, cool grinding

- Steel / Stainless
- Heat sensitive material
- Glaze resistant

Contaminant Free



### Ceramic Flapper

High performance, cool grinding and finishing

- Hardened metals
- Stainless steel
- High tensile alloys
- Hastalloys
- Inconels
- Titanium
- Heat sensitive material

Contaminant Free Ceramic Alumina



# "The Metabo System"

Pair Metabo Angle Grinders and Abrasives

**HEAVY  
DUTY**

Fast and reliable results

**SUPER  
DUTY**

Longer life, improved productivity

**EXTREME  
DUTY**

Unstoppable, unmatched productivity

## BOOST PERFORMANCE WITH METABO OPTIMIZED SYSTEMS

**HIGH POWER  
GRINDERS**



**MADE IN GERMANY**

Metabo abrasives are optimized to perform best with Metabo Grinders

## Safety Tips:

Even the world's best abrasive wheels need to be used safely. Here are some do's and do not's every operator should follow:

### "Do's and Don'ts"

#### Do:

1. Always handle and store wheels carefully.
2. Visually inspect all wheels for possible damage before mounting.
3. Make sure the tool's operating speed never exceeds the wheel speed.
4. Always check mounting flanges for equal and correct diameter.
5. Use mounting blotters when they're supplied with wheels.
6. Make absolutely sure work rest (where required) is properly adjusted (no more than 1/8" away from wheel.)
7. Always use a safety guard covering at least half of the grinding wheel.
8. Always run newly mounted wheels at full operating speed (with guard in place) for at least one minute before grinding.
9. Always wear safety glasses and appropriate face protection when grinding.
10. Always turn coolant off before stopping wheel, to avoid an out-of-balance condition.

#### Don't:

1. Don't use a wheel that has been dropped.
2. Don't force a wheel onto the tool or alter the size of the mounting hole. If the wheel won't fit the tool, get one that will.
3. Don't ever exceed the maximum operating speed established for the wheel.
4. Don't use mounting flanges that are not clean, flat and designed for the wheel being used.
5. Don't tighten the mounting nut excessively.
6. Don't grind on the side of the wheel. (See ANSI B7.1 for exceptions).
7. Don't start the tool until the wheel guard is in place.
8. Don't jam work into the wheel.
9. Don't stand directly in front of a grinding wheel when a grinder is started.
10. Don't grind material for which the wheel is not designed.





# Metabo Cutting Wheels



## Manufacturing standard

**WARNING!**  
Before using this product you must read ANSI Safety Code B7-1 and comply with OSHA requirements. In addition: **DO NOT USE** on high speed air or electric Sanders - Visually inspect before mounting - Discard if damaged - Wear goggles - Safety guard must be used - Start grinder with wheel away from you - Speed must not exceed max. RPM as marked - Use with care and in a safe manner.

## Safety guide

- Use ear protection
- Use safety rated glasses
- Use dust mask
- Use protective gloves
- Do not use on a bench grinder
- Do not use for grinding
- Limitations of usage

- Order number
- Dimensions
- Size
- Max. Speed recommended
- Formulation

Application

## Product specifications

### Specification:

The combination of letters and numbers is the genetic code of the grinding wheel.

### Abrasive:

- A Aluminium Oxide
  - For general processing of metal

### ZA Zirconia Alumina

- Special discs for metal processing

### C Silicon carbide

- For processing stone

### CA Ceramic

- Special discs for processing stainless steel and metal

### Grit

The higher the number, the finer the grit. We use grain sizes of 16 – 60 for cutting and grinding discs:

- 16 – 24 coarse
- 30 – 60 medium

### Hardness

The hardness of a grinding tool is coded alphabetically:

ABC ...	NOP ...	RST ...	Z
Very soft	Soft	hard	Very hard

- Disc label with all **product and safety information**
- Fiberglass fabric for **more safety** during the cutting process
- Mixture with high-quality **corundum, filler materials and phenolic resins**
- Additional fiber glass fabric for **even more safety**

## HEAVY DUTY

Fast and reliable results

## SUPER DUTY

Longer life, improved productivity

## EXTREME DUTY

Unstoppable, unmatched productivity

### Original Slicer

Fast, cool cutting, burr free



### Slicer-Plus

Fast cutting, long life, most versatile



### Ceramic Cutting

Extremely fast, longest life, toughest conditions, lowest total cost





## Type 1 and 27 Cutting Wheels

NOTE: Numbers in parenthesis ( ) are for when Type 27 wheel specs are different

**HEAVY DUTY**



TYPE 1 Order #	TYPE 27 Order #	Size	Max. RPM	Pcs/Pkg
<b>Original - A60TZ - Steel / Stainless Steel</b>				
■ Aluminum oxide wheel for steel and other ferrous metals. Extremely fast rate of cut. Good wheel life. Flexibility for flush cutting.				
655348000		2 X .035 X 3/8	30,558	100
655316000		3 X .040 X 1/4	25,000	100
655317000		3 X .040 X 3/8	25,000	100
655358000		3 X 1/16 X 1/4	25,000	100
655321000		3 X 1/16 X 3/8	25,000	100
655322000		4 X .040 X 1/4	22,000	50
655323000		4 X .040 X 3/8	22,000	50
655324000		4 X .040 X 5/8	22,000	50
655328000		4 X 1/16 X 3/8	19,000	100
655330000		4 X 1/16 X 5/8	19,000	100
655331000	655346000	4 1/2 x .040 (.045) x 7/8	15,000 (13,300)	100 (50)
	655346421	4 1/2 x .045 x 5/8-11	13,300	50
655334000	655353000	5 x .040 (.045) x 7/8	12,225	50
655999000		6 X .040 X 3/8	14,000	50
655338000		6 X .040 X 5/8	10,200	50
655339000	655347000	6 x .040( .045) x 7/8	10,200	50
	655347421	6 X .045 X 5/8-11		50

**HEAVY DUTY**



**HEAVY DUTY**



<b>Original - A30R - Steel</b>				
■ Aluminum oxide general purpose wheel for heavier working conditions for steel and other ferrous metals. Very fast rate of cut. Good wheel life.				
TYPE 1 Order #	TYPE 27 Order #			
655733000		5 X 1/16 x 7/8	12,225	50
<b>Long Life - A36XL / A60XL - Steel / Stainless Steel</b>				
■ Engineered aluminum oxide wheel for long life in tough applications: thin wall pipe/tube, as well as solids.				
TYPE 1 Order #	TYPE 27 Order #			
655318000 (A36XL)		3 X 1/16 X 1/4	25,000	100
655320000 (A36XL)		3 X 1/16 X 3/8	25,000	100
616321000 (A36XL)		3 X 1/8 X 3/8	25,000	100
655325000 (A36XL)		4 X 1/16 X 1/4	19,000	100
655327000 (A36XL)		4 X 1/16 X 3/8	19,000	100
655329000 (A36XL)		4 X 1/16 X 5/8	19,000	100
655332000 (A60XL)	655349000 (A60XL)	4 1/2 x .045 (1/16) x 7/8	15,000 (13,300)	100 (50)
655335000 (A60XL)	655355000 (A60XL)	5 x .045 (1/16) x 7/8	12,225	50
655344000 (A60XL)	655350000 (A60XL)	6 x .045 (1/16) x 7/8	10,200	50
655342000 (A60XL)		6 X 1/16 X 5/8	10,200	25



## Type 1 and 27 Cutting Wheels

NOTE: Numbers in parenthesis ( ) are for when Type 27 wheel specs are different

**SUPER DUTY**



### Plus - A60TX - Steel / Stainless Steel

■ **Super Duty** performance on stainless steel applications. Premium zirconia proprietary blend.

TYPE 1 Order #	TYPE 27 Order #	Size	Max. RPM	Pcs/Pkg
655996000		4 x .045 x 5/8	15,000	50
655997000	655351000	4 1/2 x .045 x 7/8	15,000 (13,300)	50
	655351421	4 1/2 x .045 x 5/8-11	13,300	50
655993000	655357000	5 x .045 x 7/8	12,225	50
655998000	655352000	6 x .045 x 7/8	10,200	50
	655352421	6 x .045 x 5/8-11		50

**SUPER DUTY**



### Super - A60XP - Steel / Stainless Steel

■ **Contaminant free**, **Super Duty** wheel for steel and stainless steel applications with a long wheel life.

TYPE 1 Order #	TYPE 27 Order #	Size	Max. RPM	Pcs/Pkg
655450000		3 X .040 X 3/8	25,000	50
655451000		3 X 1/16 X 3/8	25,000	100
655452000		4 X .040 X 3/8	19,000	50
655994000	655897000	4 1/2 x .045 x 7/8	15,000 (13,300)	50
655992000	655898000	5 x .045 x 7/8	12,225	50
655995000	655899000	6 x .045 x 7/8	10,200	50

## Ceramic Type 1 and 27 Cutting Wheels

Contaminant Free < 0.1% Iron, Sulfur and Chlorine



**EXTREME DUTY**



### M-Calibur - CA46U - Steel / Stainless Steel / High Tensile Alloy

■ **Contaminant free Extreme Duty** ceramic wheel for steel and stainless steel. Extremely long wheel life.

TYPE 1 Order #	TYPE 27 Order #	Size	Max. RPM	Pcs/Pkg
US616280000	US616272000	4 1/2 X .045 X 7/8	13,300	25
US616285000		4 1/2 X 1/16 X 7/8	13,300	25
US616284000	US616274000	6 X .045 X 7/8	10,200	25
US616287000		6 X 1/16 X 7/8	10,200	25



## Type 1 and 27 Cutting Wheels for Aluminum

**SUPER DUTY**



### Plus-Alu - A46N - Aluminum

■ **Super Duty** speciality wheel for enhanced performance on aluminum.

TYPE 1 Order #	TYPE 27 Order #	Size	Max. RPM	Pcs/Pkg
655811000	655821000	4-1/2 X .040 X 7/8	13,000	50
655812000	655822000	5 X .040 X 7/8	12,300	50
655813000	655823000	6 X .040 X 7/8	10,200	50
655814000	655824000	7 X .040 X 7/8	8,500	50

## Type 1 Cutting Wheels for Circular Saws

**HEAVY  
DUTY**



Order #	Size	Max. RPM	Pcs/Pkg
<b>Original - A30S - Steel / Stainless Steel</b>			
■ Aluminum oxide wheels for steel, other ferrous metals and rail track. Good rate of cut. Longer wheel life.			
616333000	7 X 1/8 X 5/8 DM	8,500	10



## Type 27 Cutting Wheels and Speciality Wheels

**HEAVY  
DUTY**



Order #	Size	Max. RPM	Pcs/Pkg
<b>Original - A30R - Steel</b>			
■ Aluminum oxide general purpose wheel for heavier working conditions for steel and other ferrous metals. Very fast rate of cut. Good wheel life.			
US616727000	4-1/2 X 3/32 X 7/8	13,300	25
655727000	4-1/2 X 3/32 X 5/8-11	13,300	25
655310000	5 X 3/32 X 5/8-11	12,300	25
US616313000	6 X 1/8 X 7/8	10,200	25
655313000	6 X 1/8 X 5/8-11	10,200	25
655300000	7 X 1/8 X 5/8-11	8,500	10
616302000	9 X 1/8 X 7/8	6,600	10
655302000	9 X 1/8 X 5/8-11	6,600	10

**SUPER  
DUTY**



<b>Plus - A46TZ - Steel / Stainless Steel</b>			
■ Aluminum oxide general purpose wheel for steel and other ferrous metals. Aggressive cut. Excellent wheel life. Premium zirconia proprietary blend.			
655801000	7 X 1/16 X 7/8	8,500	10
655797000	9 X 1/16 X 7/8	6,600	10
655799000	9 X 1/16 X 5/8-11	6,600	10



## Type 27 Pipeline Grinding/Notching/Cutting Wheels

Order #	Size	Max. RPM	Pcs/Pkg
---------	------	----------	---------

**HEAVY DUTY**



### Long Life - A24T - Steel / Stainless Steel

- Aluminum oxide general purpose wheel for steel and other ferrous metals. Extremely long wheel life.

616281420	4-1/2 X 1/8 X 7/8	13,300	25
655281000	4-1/2 X 1/8 X 5/8-11	13,300	25
655287000	5 X 1/8 X 7/8	12,300	25
655288000	5 X 1/8 X 5/8"-11	12,300	25
655285000	6 X 1/8 X 7/8	6,600	10
655282000	7 X 1/8 X 5/8-11	8,500	10
655284000	9 X 1/8 X 5/8-11	6,600	10

**SUPER DUTY**



### Plus-Z - ZA24T - Steel / Stainless Steel

- Zirconia alumina wheels for steel and stainless steel applications. Very aggressive stock removal. Extremely long wheel life.

655792000	4-1/2 X 1/8 X 5/8-11	13,300	25
616794420	6 X 1/8 X 7/8	10,200	25
655794000	6 X 1/8 X 5/8-11	10,200	25
655795000	7 X 1/8 X 5/8-11	8,500	10



## Type 27 Combinator: Cutting & Grinding with the Same Wheel

Order #	Size	Max. RPM	Pcs/Pkg
---------	------	----------	---------

**HEAVY DUTY**



### Combinator - A46U - Steel/Stainless Steel

- Aluminum oxide, **contaminant free** for stainless steel and other ferrous metals. Extremely long wheel life, and fast cut.

616500420	4-1/2 X 5/64 X 7/8	13,300	25
616501420	5 X 5/64 X 7/8	12,300	25
616502420	6 X 5/64 X 7/8	10,200	25



## Type 1 Cutting Wheels for Chop Saws

Order #	Size	Max. RPM	Pcs/Pkg	Formula	Wheel
---------	------	----------	---------	---------	-------

**HEAVY DUTY**



### Original - A24M

- Aluminum oxide wheels for general purpose use on steel and other ferrous metals larger chop saw applications. Excellent rate of cut. Good wheel life.

### Original - A30P

- Aluminum oxide wheels constructed with a single internal reinforcement and an aggressive cool cutting formulation best for cutting smaller diameter metals or metal studs.

### Original Long Life - A30R

- Aluminum oxide wheels for general purpose use on steel and other ferrous metals. Good rate of cut. Good wheel life.

### Original Long Life - A30S

- Aluminum oxide wheels specially formulated for dry wall stud applications. Good rate of cut. Good wheel life.

616340000	14 X 3/32 X 1	4,300	10	A24M	Original
655236000	14 X 3/32 X 1 Internal Reinforced	4,300	10	A30P	Original
616215000	16 X 3/32 X 1	3,820	10	A24M	Original
616337420	12 X 3/32 X 1	5,100	10	A30R	Original Long Life
616146000	14 X 3/32 X 1	4,300	10	A30S	Original Long Life
US616338000	14 X 3/32 X 1	4,300	10	A30R	Original Long Life

## Type 1 Cutting Wheels for High Speed Saws

**HEAVY  
DUTY**



Order #	Size	Max. RPM	Pcs/Pkg	Formula	Wheel
---------	------	----------	---------	---------	-------

### Original - A24N

- Aluminum oxide wheels general purpose for steel and other ferrous metals. Fast rate of cut. Good wheel life.

### Original Long Life - A30S

- Aluminum oxide wheels for steel, other ferrous metals and rail track. Good rate of cut. Longer wheel life.

### Original - C24N

- Silicon carbide general purpose wheel for stone, concrete, cast iron, ductile iron, masonry materials, non-ferrous metals, brass, bronze, plastic, etc. Fast rate of cut. Good wheel life.

### Plus - AC24R

- Aluminum oxide and Silicon carbide combination wheel specially formulated for ductile iron. Excellent rate of cut. Excellent wheel life. Smooth and chatter free cutting.

US616136000	12 X 1/8 X 20mm	6,400	10	A24N	Original
616159000	14 X 1/8 X 1	5,400	10	C24N	Original
616140000	14 X 1/8 X 20mm	5,460	10	A24N	Original
616160000	14 X 1/8 X 20mm	5,460	10	C24N	Original
616149000	14 X 1/8 X 1	5,400	10	AC24R	Plus
616142000	14 X 1/8 X 20mm	5,460	10	AC24R	Plus

655172000 Reduced bushing from 1" to 20mm

## Type 1 Cutting Wheels for Stationary Saws

**HEAVY  
DUTY**



Order #	Size	Max. RPM	Pcs/Pkg	Formula	Wheel
---------	------	----------	---------	---------	-------

### Original - A30N

- Aluminum oxide wheels are specially formulated for high powered tools to cut steel and other ferrous metals. Excellent rate of cut. Good wheel life

### Original Long Life - A30R

- Aluminum oxide wheels specially formulated for high powered tools to cut steel and other ferrous metals. Fast rate of cut. Longer wheel life.

### Original Long Life - A30S

- Aluminum oxide wheels for steel, other ferrous metals and rail track. Good rate of cut. Longer wheel life.

### Plus - A30V

- Aluminum oxide wheels are specially formulated for high powered tools to cut steel and other ferrous metals. Good rate of cut. Excellent wheel life.

616365000	20 X 3/16 X 1	4,800	5	A30N	Original
616203000	14 X 1/8 X 1	4,400	10	A30S	Original Long Life
616366000	20 X 3/16 X 1	3,000	5	A30R	Original Long Life
616367000	20 X 3/16 X 1	3,000	5	A30V	Plus

# Metabo Grinding Wheels



## HEAVY DUTY

Fast and reliable results

### Original

High removal rate



## SUPER DUTY

Longer life, improved productivity

### Plus-Z Grind

Aggressive high stock removal rate, long life, cool grinding, most versatile



## EXTREME DUTY

Unstoppable, unmatched productivity

### Ceramic M-Calibur

Extreme removal, longest life, lowest total cost





Available in a wide range of sizes; 3" to 9" diameter in Type 27 depressed center wheels.



### Type 27 Depressed Center Grinding Wheels Steel, Stainless Steel

Order #	Size	Max. RPM	Pcs/Pkg
---------	------	----------	---------

**HEAVY DUTY**



#### Original - A24N - Steel

■ Aluminum oxide general purpose wheel for grinding steel and other ferrous metals in normal working conditions. High stock removal. Good wheel life.

US616726000	4-1/2 X 1/4 X 7/8	13,300	25
655726000	4-1/2 X 1/4 X 5/8-11	13,300	25
655730000	5 X 1/4 X 5/8-11	12,300	25
US616554000	6 X 1/4 X 7/8	10,200	25
655554000	6 X 1/4 X 5/8-11	10,200	25
616560000	7 X 1/4 X 7/8	8,500	25
655560000	7 X 1/4 X 5/8-11	8,500	10
US616572000	9 X 1/4 X 7/8	6,600	25
655572000	9 X 1/4 X 5/8-11	6,600	10

**HEAVY DUTY**



#### Long Life - A24R - Steel

■ Aluminum oxide general purpose wheel for grinding steel and other ferrous metals in normal working conditions. High stock removal. Long wheel life.

616330000	4 X 1/4 X 5/8	15,300	25
616307000	4-1/2 X 1/4 X 7/8	13,300	25
655307000	4-1/2 X 1/4 X 5/8-11	13,300	25
616308000	5 x 1/4 x 7/8	12,300	25
655308000	5 X 1/4 X 5/8-11	12,300	25
616319000	6 X 1/4 X 7/8	10,200	25
655319000	6 X 1/4 X 5/8-11	10,200	25
616782000	7 X 1/4 X 7/8	8,500	10
655782000	7 X 1/4 X 5/8-11	8,500	10
655784000	9 X 1/4 X 5/8-11	6,600	10

**SUPER DUTY**



#### Plus-Z - ZA24T - Steel / Stainless Steel

■ Zirconia alumina wheels for steel and stainless steel applications. Very aggressive stock removal. Extremely long wheel life.

616785000	4-1/2 X 1/4 X 7/8	13,300	25
655785000	4-1/2 X 1/4 X 5/8-11	13,300	25
616787000	6 X 1/4 X 7/8	10,200	25
655787000	6 X 1/4 X 5/8-11	10,200	25
655788000	7 X 1/4 X 5/8-11	8,500	10
655789000	9 X 1/4 X 5/8-11	6,600	10





## Type 27 Grinding Wheels for Stainless Steel

Contaminant Free < 0.1% Iron, Sulfur and Chlorine

Order #	Size	Max. RPM	Pcs/Pkg
---------	------	----------	---------

**SUPER  
DUTY**



### Super - A360 - Steel / Stainless Steel / High Tensile Alloy

- Contaminant free, Super Duty aluminum oxide wheel specially formulated for harder metals such as stainless steel. Good stock removal. Good wheel life.

616739000	4-1/2 x 1/4 x 7/8	13,300	25
US616747000	5 x 1/4 x 7/8	12,300	25
US616604000	6 X 1/4 X 7/8	10,200	25
655610000	7 X 1/4 X 5/8-11	8,500	10

**EXTREME  
DUTY**



### M-Calibur - CA46U - Steel / Stainless Steel / High Tensile Alloy

- Contaminant free, Extreme Duty ceramic wheel for steel and stainless steel. Extremely long wheel life.

US616290000	4-1/2 x 1/4 x 7/8	13,300	10
US655290000	4-1/2 x 1/4 x 5/8-11	13,300	10
US616291000	5 x 1/4 x 7/8	12,200	10
US616292000	6 x 1/4 x 7/8	10,200	10
US655292000	6 x 1/4 x 5/8-11	10,200	10



## Type 27 Specialty Grinding Wheels

Masonry, Aluminum

Order #	Size	Max. RPM	Pcs/Pkg
---------	------	----------	---------

**HEAVY  
DUTY**



### Original - C24N - Masonry / Non-Ferrous

- Silicon carbide general purpose wheel for stone, concrete, cast iron, ductile iron, masonry materials, non-ferrous metals, brass, bronze, etc. High stock removal. Good wheel life.

616729000	4-1/2 x 1/4 x 7/8	13,300	25
655729000	4-1/2 X 1/4 X 5/8-11	13,300	25
616660000	7 X 1/4 X 7/8	8,500	25
655660000	7 X 1/4 X 5/8-11	8,500	10

**SUPER  
DUTY**



### Plus - A36M - Aluminum

- Aluminum oxide wheel formulated for aluminum grinding applications. Good stock removal. Good wheel life. Non clogging capability.

655748000	4-1/2 X 1/4 X 5/8-11	13,300	25
616749000	5 x 1/4 x 7/8	12,300	25



## Type 11 Cup Wheels with Steel Backs for Angle Grinders



Order #	Size	Max. RPM	Pcs/Pkg	Formula
---------	------	----------	---------	---------

### A16Q

- Aluminum oxide general purpose wheel for grinding steel and other ferrous metals. High stock removal. Good wheel life.

### C16N

- Silicon carbide general purpose wheel for grinding stone, concrete, ductile iron, masonry materials, non-ferrous metals (brass, bronze, etc.) and cast iron. High stock removal. Good wheel life.

### ZA16

- Zirconia alumina for aggressive stock removal and extra long wheel life grinding steel and stainless steel.

616341119	4 x 3 x 2 x 5/8-11	9,000	10	A 16 Q
616342119	4 x 3 x 2 x 5/8-11	9,000	10	C 16 N
616343119	5 x 4 x 2 x 5/8-11	7,200	10	A 16 Q
616345119	6 x 4-3/4 x 2 x 5/8-11	6,000	10	A 16 Q
616347119	6 x 4-3/4 x 2 x 5/8-11	6,000	10	ZA 16 T

## GUARDS



Cup wheel guard and flange for mounting 4" - 6" Type 11 cup wheels on 7" - 9" angle grinders  
 Guards: **655174000** - 4<sup>1</sup>/<sub>5</sub>",  
**655178000** - 6"  
 Mounting flange **US90357006**



**623276000** Cup wheel guard for mounting 3 1/8" Type 6 cup wheels on 4 1/2" - 6" angle grinders

# Metabo Flap Discs and Resin Fiber Discs



## HEAVY DUTY

Fast and reliable results

Fast stock removal,  
one step blending  
and finishing



## SUPER DUTY

Longer life, improved productivity

Aggressive stock removal,  
long life, most versatile,  
one step blending  
and finishing,  
cool grinding



## EXTREME DUTY

Unstoppable, unmatched productivity

Extreme removal rate,  
longest life,  
lowest total cost



HEAVY DUTY

SUPER DUTY

EXTREME DUTY

# Flappers



**4-1/2"**

120 grit: special order, previous design

## Original Flapper

Fast stock removal, one step blending and finishing



- Steel / Stainless
- Ferrous metal
- High performance Zirconia blend
- Contaminant Free

Grit	7/8"			5/8"-11 (hubbed)		
	Type 29	Type 27	Pack	Type 29	Type 27	Pack
40	629405000	629467000	10	629401000	629464000	5
60	629406000	629468000	10	629402000	629465000	5
80	629407000	629469000	10	629403000	629466000	5
120	623178000		10	656455000		5

## Flapper Plus

Aggressive stock removal, long life, most versatile, one step blending and finishing, cool grinding



- Steel / Stainless
- Heat sensitive material
- Glaze resistant
- Premium Zirconia and high flap density for increased performance and longer life
- Contaminant Free

Grit	7/8"			5/8"-11 (hubbed)		
	Type 29	Type 27	Pack	Type 29	Type 27	Pack
36	629418000	629480000	10	629408000	629470000	5
40	629419000	629481000	10	629409000	629471000	5
60	629420000	629482000	10	629410000	629472000	5
80	629421000	629483000	10	629411000	629473000	5
120	656427000	656425000	10	656428000	656426000	5

## Flapper Plus **JUMBO**

Based on the flapper plus technology, this exceptional wheel contains 62% more flaps for unbeatable wheel life.



**JUMBO vs. Standard**

Grit	7/8"			5/8"-11 (hubbed)		
	Type 29	Type 27	Pack	Type 29	Type 27	Pack
40	629431000	629490000	5	629425000	629487000	5
60	629432000	629491000	5	629426000	629488000	5
80	629433000	629492000	5	629427000	629489000	5
120	656429000		10			

## Ceramic Flapper

Highest performance, cool operation



- Hardened metals
- Stainless steel
- High tensile alloys
- Hastalloys
- Inconels
- Titanium
- Heat sensitive material
- Contaminant Free
- Ceramic Alumina

Grit	7/8"		
	Type 29	Type 27	Pack
40	629437000	629493000	10
60	629438000	629494000	10
80	629439000	629495000	10

## Flapper Plus **Trimmable**



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629446000	5
60	629447000	5
80	629448000	5

## Ceramic Flapper **Trimmable**



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629455000	5
60	629456000	5
80	629457000	5

**Trimmable Flappers**

- Trimmable for longer life
- Increased flexibility of flap disc
- Integrated 5/8"-11 threading

**5"** Ceramic Flapper



Grit	7/8"	
	Type 29	Pack
40	629440000	10
60	629441000	10
80	629442000	10

**Flapper Plus *Trimnable***



Grit	5/8"-11 (Hubbed)	
	Type 29	Pack
40	629449000	5
60	629450000	5
80	629451000	5

**Ceramic Flapper *Trimnable***



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629458000	5
60	629459000	5
80	629460000	5

**6"** Flapper Plus



Grit	7/8"			5/8"-11 (hubbed)		
	Type 29	Type 27	Pack	Type 29	Type 27	Pack
40	629422000	629484000	10	629412000	629474000	5
60	629423000	629485000	10	629413000	629475000	5
80	629424000	629486000	10	629414000	629476000	5
120	656433000		10	656437000		5

**Ceramic Flapper**



Grit	7/8"		Pack
	Type 29	Type 27	
40	629443000	629499000	10
60	629444000	629500000	10
80	629445000	629501000	10

120 grit: special order, previous design

**Flapper Plus *Trimnable***



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629452000	5
60	629453000	5
80	629454000	5

**Ceramic Flapper *Trimnable***



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629461000	5
60	629462000	5
80	629463000	5

**7"** Original Flapper



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629404000	5

**Flapper Plus**



Grit	5/8"-11 (hubbed)		
	Type 29	Type 27	Pack
40	629415000	629477000	5
60	629416000	629478000	5
80	629417000	629479000	5

**Flapper Plus *JUMBO***





Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629428000	5
60	629429000	5
80	629430000	5

**Ceramic Flapper**



Grit	5/8"-11 (hubbed)	
	Type 29	Pack
40	629434000	5
60	629435000	5
80	629436000	5

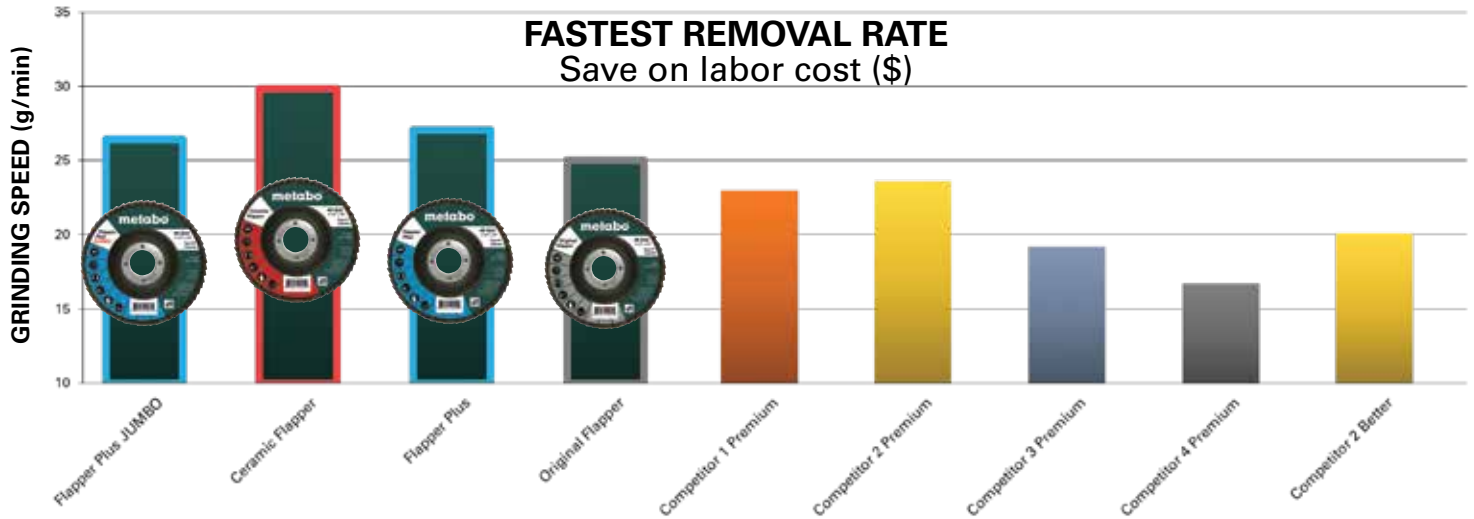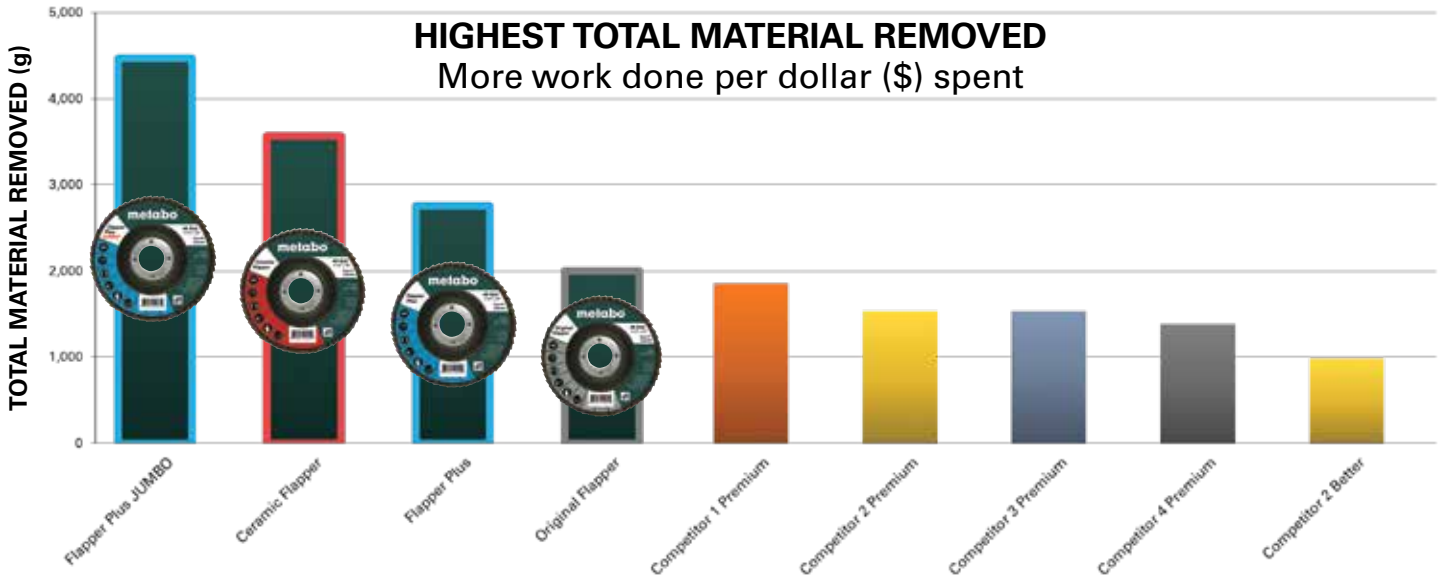

## BOOST PERFORMANCE WITH METABO OPTIMIZED SYSTEMS

**HIGH POWERED METABO GRINDER**



**MADE IN GERMANY**

Use the **WP 12-115 Quick** 4-1/2" Angle Grinder with Metabo 4-1/2" Flappers for optimum performance

# SPEED-FLEX CERAMIC

Removal rate of a grinding wheel - Flexibility of a flap disc!

Aggressive like a grinding wheel with the flexibility and comfort of a flap disc. Improved surface quality results and blending. Extreme performance, fastest removal rate, lightweight, cool operation, reduced noise and dust during operation.

- Weld seam removal
- Mill-scale removal
- Beveling
- Hardened metals
- Stainless steel
- High tensile alloys
- Contaminant Free



**AVAILABLE SIZES: 4-1/2", 5", 6", 7"**



**EXTREME DUTY**

7/8"			5/8"-11 (hubbed)		
Type 29	Pack	Size (36 GRIT)	Type 29	Pack	Size (36 GRIT)
655833000	25	4 1/2" Speed-Flex 36 7/8 T29 Fiberglass	655834000	10	4 1/2" Speed-Flex 36 5/8-11 T29 Fiberglass
655837000	25	5" Speed-Flex 36 7/8 T29 Fiberglass			
655841000	25	6" Speed-Flex 36 7/8 T29 Fiberglass	655842000	10	6" Speed-Flex 36 5/8-11 T29 Fiberglass
655845000	25	7" Speed-Flex 36 7/8 T29 Fiberglass	655846000	10	7" Speed-Flex 36 5/8-11 T29 Fiberglass

## WHAT MAKES UP THE SPEED-FLEX?




Disc label with all **product and safety information**

3 layers of fiberglass fabric for **more safety** during the grinding process

Resin fiber for **aggressive** material removal

## SURFACE FINISH QUALITY





## Resin Fiber Abrasives Discs - Closed Coat

**Aluminum Oxide (A)** - General purpose disc for grinding steel and other ferrous metals. Good cutting rate and excellent life.

**Zirconia Alumina (ZA)** - Very aggressive stock removal on steel, stainless steel and other metal applications, extremely long life, cooler grinding.

**Ceramic Grain (CER)** - Offers extremely high removal rates and extreme longevity, especially when grinding Stainless Steels, Titanium, Inconel and Alloy Steels.





	Disc Size	Aluminum Oxide		Zirconia Alumina		Ceramic Grain	
		Grit	Slotted Order #	Grit	Non-Slotted Order #	Grit	Slotted Order #
623283000 13,000 RPM	4-1/2 x 7/8	A16	624135000	ZA16			
	4-1/2 x 7/8	A24	624136000	ZA24	656350000		
	4-1/2 x 7/8	A36		ZA36	656351000	CER36	626151000
	4-1/2 x 7/8	A40	624137000	ZA40			
	4-1/2 x 7/8	A50	624144000	ZA50	656352000		
	4-1/2 x 7/8	A60	624138000	ZA60	656353000	CER60	626152000
	4-1/2 x 7/8	A80	624139000	ZA80	656354000	CER80	626153000
	4-1/2 x 7/8	A100	624140000	ZA100			
	4-1/2 x 7/8	A120	624141000	ZA120			
	4-1/2 x 7/8	A150	624142000	ZA150			
	4-1/2 x 7/8	A180	624143000	ZA180			
	623284000 12,000 RPM	5 x 7/8	A16	624223000	ZA16		
5 x 7/8		A24	624218000	ZA24	656355000	CER24	626154000
5 x 7/8		A36		ZA36	656356000	CER36	626155000
5 x 7/8		A40	624219000	ZA40			
5 x 7/8		A50	624217000	ZA50	656357000		
5 x 7/8		A60	624220000	ZA60	656358000	CER60	626156000
5 x 7/8		A80	624221000	ZA80	656359000	CER80	626157000
5 x 7/8		A100	624222000				
5 x 7/8		A120	624224000				
5 x 7/8		A150	624225000				
5 x 7/8		A180	624226000				
623281000 8,500 RPM		7 x 7/8	A24	624103000			
	7 x 7/8	A36		ZA36	656361000	CER36	626159000
	7 x 7/8	A40	624104000	ZA40			
	7 x 7/8	A50	624102000				
	7 x 7/8	A60	624105000	ZA60	656363000	CER60	626160000
	7 x 7/8	A80	624106000	ZA80	656364000	CER80	626161000
	7 x 7/8	A100	624107000				
623282000 6,600 RPM	9 x 7/8	A24	624227000				
	9 x 7/8	A36		ZA36	656366000		
	9 x 7/8	A40	624228000				


Note: All sold in packs of 25 and backing pads with M14 arbor available.




### For Small Angle Grinders


	Steel Order#	Stainless Order#	Dia.	Trim Length	Thread	Wire	Max RPM	Use on	Pcs/Pkg
	655207000		2-3/4"	1"	5/8"-11	.012 crimped	14,000	4"-6" grinders	1
	623796000	623801000	2-3/4"	3/4"	M14-2.0	.014 knotted	12,500	4"-6" grinders	1
		623805000	2-3/4"	3/4"	5/8"-11	.014 knotted	12,500	4"-6" grinders	1
	623804000		2-3/4"	3/4"	5/8"-11	.020 knotted	12,500	4"-6" grinders	1
	655200000	655201000	2-3/4"	1"	5/8"-11	.020 knotted	14,000	4"-6" grinders	1
	655203000		3-1/2"	1-1/4"	5/8"-11	.014 crimped	12,000	4"-6" grinders	1
		655205000	3-1/2"	1-1/4"	5/8"-11	.014 knotted	12,000	4"-6" grinders	1
	655202000	655204000	3-1/2"	7/8"	5/8"-11	.023 knotted	13,000	4"-6" grinders	1

	Steel Order#	Stainless Order#	Dia. x Face	Trim Length	Thread	Wire	Max RPM	Use on	Pcs/Pkg
	655137000	655138000	4" x 3/16"	7/8"	5/8"-11	.020 knotted	20,000	4"-6" grinders	1
	655136000	655221000	4" x 3/8"	7/8"	5/8"-11	.020 knotted	20,000	4"-6" grinders	1
	655215000		4" x 1/2"	7/8"	5/8"-11	.014 knotted	20,000	4"-6" grinders	1
	655227000		4" x 1/2"	7/8"	5/8"-11	.014 crimped	14,000	4"-6" grinders	1
	655228005	655231005	4-1/2" x 3/16"	13/16"	5/8"-11	.020 knotted	12,500	4.5"-6" grinders	5
	655229005	655232005	5" x 3/16"	7/8"	5/8"-11	.020 knotted	12,500	5"-6" grinders	5
	655230005	655233005	5" x 1/2"	7/8"	5/8"-11	.023 knotted	12,500	5"-6" grinders	5

	Steel Order#	Stainless Order#	Dia. x Face	Trim Length	Thread	Wire	Max RPM	Use on	Pcs/Pkg
	655234000	655235000	4" x 3/8"	3/4"	5/8"-11	.020 knotted	12,500	4"-6" grinders	1
	626816000		6" x 7/8"	3/4"	5/8"-11	.020 knotted	12,500	4"-6" grinders	1

### For Large Angle Grinders

	Steel Order#		Dia.	Trim Length	Thread	Wire	Max RPM	Use on	Pcs/Pkg
	655209000		4"	1-3/8"	5/8"-11	.014 crimped	9,000	7"-9" grinders	1
	623765000		4"	1-1/8"	5/8"-11	.023 knotted	9,000	7"-9" grinders	1
	655211000		6"	1-1/4"	5/8"-11	.014 crimped	6,600	7"-9" grinders	1
	655210000		6"	1-3/8"	5/8"-11	.023 knotted	6,600	7"-9" grinders	1

	Steel Order#	Stainless Order#	Dia. x Face	Trim Length	Thread	Wire	Max RPM	Use on	Pcs/Pkg
	655134000	655218000	6" x 5/16"	1-3/8"	5/8"-11	.023 knotted	9,000	7"-9" grinders	1
	655133000		6-7/8" x 3/16"	1-1/4"	5/8"-11	.020 knotted	9,000	7"-9" grinders	1





04



## Metal Solutions

- **Advanced solutions for metalworking; weld preparation, edge work, finishing, sharpening, drilling**
- **Systems for increasing your productivity with highest quality and performance, for lowest cost of operation**

# WELD PREP, EDGE PREP, BEVEL, CHAMFER AND RADIUS



Rotatable Battery Pack  
- For working in confined spaces

Detachable Dust Filter  
- Protects motor components from damage

Additional Cutting Guide  
- For increased precision of straight edges and perfect beveled corners

Patented One-Touch Controller  
- Tool free depth adjustment  
- Unmatched precision  
- Locked in depth settings



First cordless beveling tool for 45° chamfers up to 5/32" and radii 5/64" / 1/8"



LEARN MORE!

KFM 18 LTX 3 RF  
(5/32" capacity at 45°)  
(5/64", 1/8" radius)



## COMPACT BEVELING TOOLS



Used for 45° chamfers to 5/32 depth and radii of 5/64" and 1/8"



Model	KFM 9-3 RF	KFM 18 LTX 3 RF
Order No.	601751750	601754750 (5.5 AH LiHD Kit) 601754840 (Bare)
No-Load RPM	4,500-11,500	7,000
Rated Input Power/battery pack	900W / 8.0A	18 V LiHD, 5.5 Ah
Max. chamfer height at 45°	5/32"	5/32"
Possible radii	5/64" and 1/8"	5/64" and 1/8"
Depth setting index	.004 increments	.004 increments
Type of edges	Chamfer and radius	Chamfer and radius
Cable length	13'	n/a

Includes:

Torx 15 driver, 1.5mm hex key, 2 ea. 45° bevel and 5/64" / 1/8" radius carbide inserts

# COMPACT BEVELING TOOL ACCESSORIES



(DCMT II T 304)  
P/N: 623560000 - 45°

### Indexable Carbide Inserts

- Constructed of long life tungsten carbide
- Chamfer and radius versions
- Pack of 10



P/N: R2 (5/64"): 623561000  
P/N: R3 (1/8"): 623562000




P/N: 623566000

### Replacement Insert Screws

- Pack of 10

## VARIOUS APPLICATION AREAS

### Possible cutting shapes

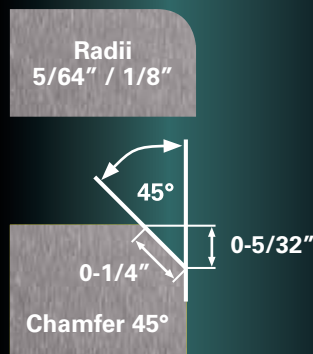


### Possible edges/contours for compact beveling tools


**Chamfer or radius straight edges**  
Using cutting guide  
(min. thickness: 23 gauge)




**Inside/outside curves**  
Chamfer or radius with guide bearing  
(min. thickness: 23 gauge)



**Inside holes/curves**  
Chamfer or radius internal holes with guide bearing  
(min. diameter 1/2")



## HIGH SURFACE QUALITY = PRECISE WORK RESULTS

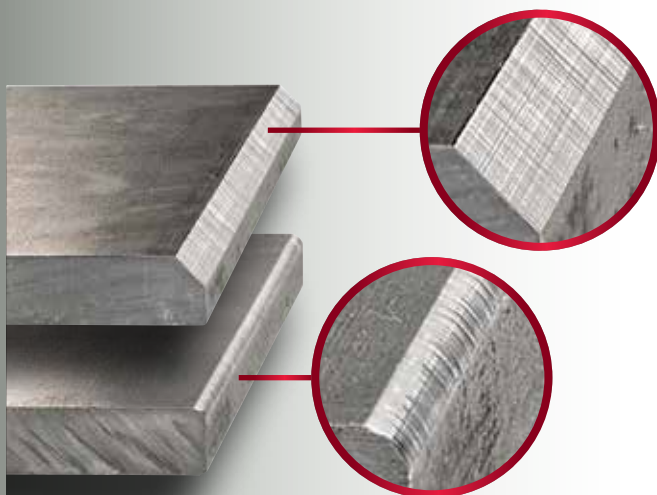

With angle grinder



- Uniform surfaces for highest weld quality
- Edge breaking/deburring of sheet metal
- Perfect radii of edges for optimal paint/coating preparation

### Optimal paint/powder coating preparation

#### Processing of edges:

- Perfectly rounded edges
- Uniform coating thickness  
→ best protection from corrosion



#### Without edge processing:

- Increased risk of corrosion at corners



# BEVELING TOOLS

Patented One-Touch Controller  
 - Tool free depth adjustment  
 - Unmatched precision  
 - Locked in depth settings

13A / 1500 Watt LongLife Motor  
 - With integrated dust protection

Front Handle  
 - Tool free adjustable front handle

Deadman Switch and Safety Brake




Bevel Angle Adjustment  
 - Easy adjustment from 0° - 90°

Roller Guide  
 - Increases precision for pipe beveling

Universal Cutter Head  
 - No need for multiple heads/cutters

Large Guide Plates  
 - Excellent control for beveling straight cuts and perfect beveled corners

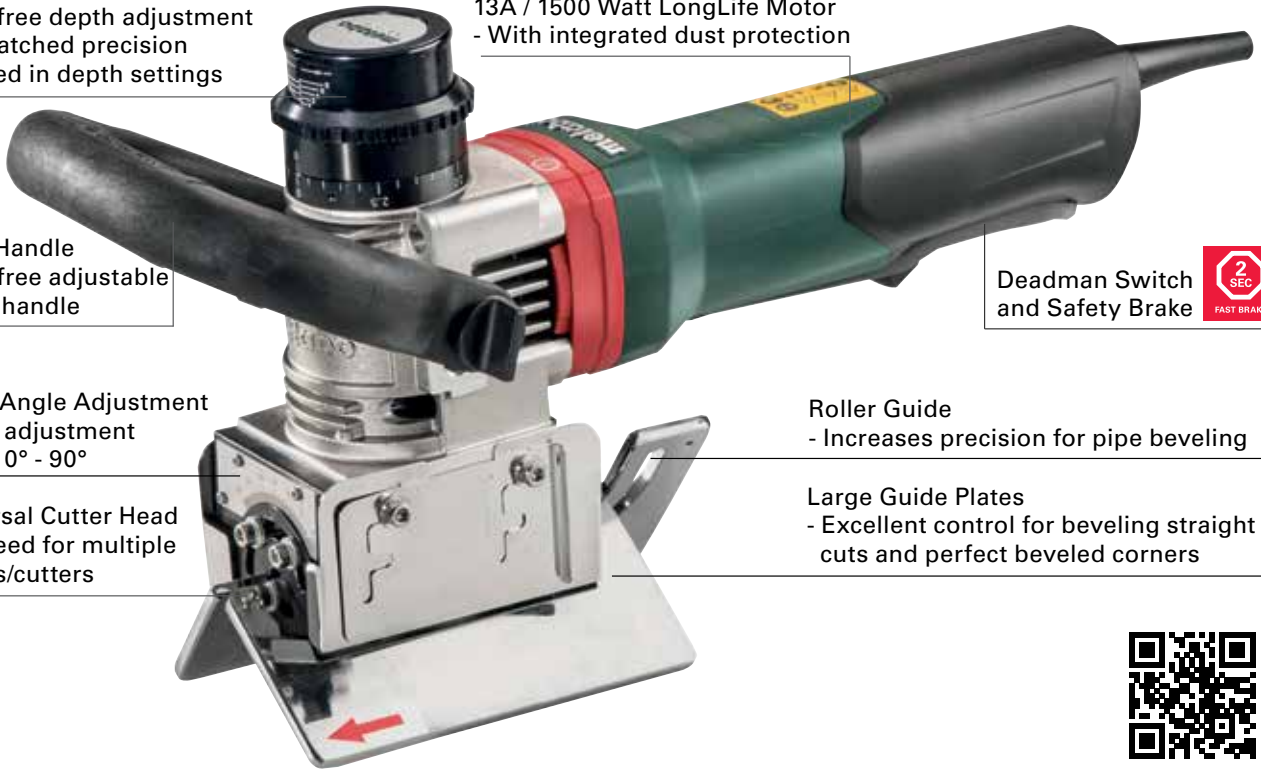

**KFMPB 15-10 F**  
 (3/8" capacity at 45°)

**LEARN MORE!**



## BEVELING TOOLS FOR WELD SEAM PREPARATION



**KFM 15-10 F**

Used for bevel heights up to 3/8" at 45° for weld preparation



Paddle + Brake

**KFMPB 15-10 F**



**KFM 16-15 F**

Used for bevel heights up to 5/8" at 45° for weld preparation

Models	KFM 15-10 F	KFMPB 15-10 F	KFM 16-15 F
Order No.	601752620	601755620	601753620
No-Load RPM	7,800 - 12,200	12,500	12,000
Rated input power	1,500W /13A	1,500W /13A	1,550W / 14A
Maximum bevel height at 45°	3/8"	3/8"	5/8"
Depth setting index	.004 increments	.004 increments	.004 increments
Bevel angle setting	0 – 90 degrees	0 – 90 degrees	0 – 90 degrees
Cable length	13'	13'	13'
Tool weight (without power cable)	10.8 lbs./11.2 lbs.	10.8 lbs./11.2 lbs.	15.2 lbs.

Includes:

Torx 15 driver, 4mm hex key, 10mm wrench,  
 3 SQ4 carbide inserts (623564000), roller guide for pipe

# LARGE BEVELING TOOL ACCESSORIES

QUICK AND SAFE BEVELING = **MORE THAN 70% LABOR SAVINGS!**



**5x more edges processed**  
in the same period of time


**VS.**

9" Angle Grinder



**Infinitely adjustable guide plates quickly adjust, saving time and money**

- One cutter head for all bevel angles 0 - 90 °
- No additional cutter heads required to achieve multiple angles
- Infinitely adjustable

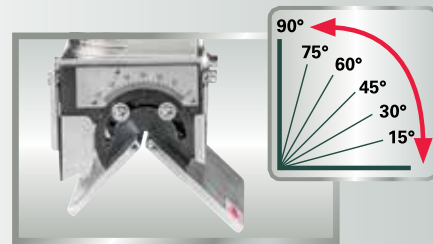

## PRECISE CHAMFER ANGLES = OPTIMUM WELDING CONDITIONS

**More precise than an angle grinder**

- Creates clean surfaces without burrs, oxidation or blue discoloration due to heat generation
- The large surface guide plates maintain uniform chamfer angles and depth



## ACCESSORIES



P/N: 623564000  
(For Steel)



P/N: 623565000  
(For Stainless Steel)



P/N: 623559000  
(For Aluminum, Plastic and Soft Metals)



P/N: 623566000

### Indexable Carbide Inserts

- Longer life & fewer replacements are required
- Up to 600 linear feet using all 4 sides
- Pack of 10

### Replacement Insert Screws

- Pack of 10

# FINISHING AND POLISHING TOOLS



**CORDED**  
**4 1/2"-5" Angle Grinder**  
 WEV 17-125 Quick INOX



Backing pad  
not included

**CORDED**  
**Variable Speed High Torque**  
**Dry Polisher**  
 PE 15-20 RT



**CORDED**  
**Variable Speed High Torque**  
**Dry Polisher**  
 PE 15-30

Model	WEV 17-125 Quick INOX 600517420
Electronics	Vario-tacho-constamatic (VTC)
Electronic soft start feature	•
Electronic speed stabilization	•
Power interruption protection	•
Overload protection	•
Motor	LongLife
Quick wheel change system	•
Switch with lock on capability	•
Low profile aluminum die-cast gear housing	•
Variable speed dial	•
Burst-proof guard w/ 7 stops	•
Anti-vibration side handle	•
Metabo safety slip clutch	•
Auto-stop carbon brushes	•
Winding protection grid	•
Maximum torque	37.2 inch lbs.
Maximum wheel diameter	5"
No-load speed (RPM)	2,000-7,600
Amps	14.5
Rated input watts	1,550
Arbor size	7/8"
Spindle thread	5/8"-11
Carrying case	344454180 (optional)
<b>Standard equipment:</b>	MVT Vibratex side handle (314000970) Wheel guard (339204500) Inner flange (341031290) Locking nut (316055450)
<b>Optional equipment:</b>	Detachable dust filter (630719000)

Model	PE 15-20 RT 615200420	PE 15-30 615300420
Maximum pad diameter	7"	7"
Double insulated	•	•
Electronic features:		
Speed stabilization	Vario-tacho-constamatic (VTC)	
Power interruption protection	•	•
Overload protection	•	•
Soft start feature	•	•
Restart protection	•	•
Electronic winding temperature monitor with LED display	•	•
Winding protection grid	•	•
Planetary gearing	•	•
Variable speed controlled by adjusting dial	•	•
Auto-stop carbon brushes	•	•
No-load speed (RPM)	300-1,900 RPM	800-3,000 RPM
Amps	13	13
Rated input watts	1,500	1,550
Spindle thread	5/8"-11	5/8"-11
Carrying case		
<b>Standard equipment:</b>		
Side handle	314000540	
Loop handle		•
<b>Optional equipment:</b>		
5" soft backing pad	655141000	655141000
5" medium backing pad	655129000	655129000
5" hard backing pad	623298000	623298000
7" hard backing pad	655143000	655143000

See accessories page 99





**SCV 18 LTX BL 1.6**  
18V Cordless Shearer



**NIV 18 LTX BL 1.6**  
18V Cordless Nibbler

Model Bare Tool:	SCV 18 LTX BL 1.6 601615840	NIV 18 LTX BL 1.6 601614840
Type of battery pack	LiHD	LiHD
Battery voltage	18 V	18 V
No-load strokes per minute	1,350 - 4,840	660 - 2,360
Max. material thickness		
- Mild steel	16 gauge	1/16"
- Stainless steel	18 gauge	3/64"
- Aluminum	14 gauge	14 gauge
Smallest curve radius	5/8"	1 9/16"
Starting hole Ø	1"	53/64"
Cutting track width		13/64"
<b>Standard equipment:</b>	(2) Blades (630239000)	Punch (630243000)
	(2) Hexagon Wrenches	Die (630247000)
	Feeler gauge	Combination key
	MetaLoc Case	MetaLoc Case
<b>Optional equipment:</b>		
For med-high carbon steel	2 Blades (630241000)	



**NEW**

**MT 18 LTX BL QSL**  
18V Multi-Tool



Model Bare Tool:	Multi-Tool 613088840
Voltage	18 V
Length	250 mm / 10"
Electronics	VTC Electronics
Weight	2.6 lbs / 1,2 kg
Oscillating angle	3.2°
Oscillations per minute	8,000-20,000 opm
Accessory compatibility	Starlock®, StarlockPlus®
Brushless motor	•
Double LED Illumination	•
Tool-less magnetic blade change	•
<b>Standard equipment:</b>	Case, curved-tec StarlockPlus® wood + metal blade (626945000)

**DEPTH STOP +  
DUST EXTRACTION**

**626943000**  
Depth stop + dust extraction

**SANDING PLATE**

**626944000**  
3-5/8" (93 mm)  
StarlockPlus® sanding plate

**StarlockPlus® SAW BLADES**



**626945000**  
1-1/4" x 2 3/8" (32 x 60 mm)  
StarlockPlus® plunge saw blade  
For wood+metal



**626946000**  
1-1/4" x 2 3/8" (32 x 60 mm)  
StarlockPlus® plunge saw blade  
For wood



**626947000**  
1-1/4" x 2" (32 x 50 mm)  
StarlockPlus® precision saw blade  
For wood



**626948000**  
1-1/4" x 2" (32 x 50 mm)  
StarlockPlus® plunge saw blade  
For metal



**626949000**  
1-1/2" x 2" (40 x 53 mm)  
StarlockPlus® saw blade  
For wood/abrasive

# DIE GRINDERS



**GP 400**  
25,000 RPM  
AC/DC Paddle Switch  
Die Grinder



**GE 710 Plus**  
10,000-30,500 RPM Die Grinder



**GE 950 G Plus**  
2,500-8,700 RPM  
High Torque Die Grinder



**GPA 18 LTX**  
25,000 RPM  
18V DC Paddle Switch Die Grinder



**GEP 710 Plus**  
10,000-30,500 RPM  
Paddle Switch Die Grinder



**GE P950 G Plus**  
2,500-8,700 RPM Paddle Switch  
High Torque Die Grinder



**GE 710 Compact**  
13,000-34,000 RPM  
Die Grinder



**GA 18 LTX G**  
6,000 RPM High Torque  
18V DC Die Grinder

Model	GP 400 600453420	GPA 18 LTX 600621860 Bare tool	GE 710 Compact 600615420	GE 710 Plus 600616420	GEP 710 Plus 600617420	GA 18 LTX G 600639860 Bare tool	GE 950 G Plus 600618420	GEP 950 G Plus 600627420
Switch Type	Non-locking paddle	Non-locking paddle	Slide locking	Slide locking	Non-locking paddle	Slide locking	Slide locking	Non-locking paddle
Spindle lock - single wrench system		•		•	•	•	•	•
Removable soft rubber grip	•	•		•	•		•	•
Extended spindle	•	•		•	•	•	•	•
High torque planetary gear reduction						•	•	•
Motor	Heavy Duty	Cordless	LongLife	LongLife	LongLife	Cordless	LongLife	LongLife
AC/DC Capability	AC/DC	18V DC	AC	AC	AC	18V DC	AC	AC
Electronics								
- Variable speed control			VC	VC	VC		VC	VC
- Electronic overload protection		•	•	•	•	•	•	•
- Power interruption protection		•	•	•	•	•	•	•
- Electronic safety stop		•	•	•	•	•	•	•
No-load speed (RPM)	25,000	25,000	13,000-34,000	10,000-30,500	10,000-30,500	6,000	2,500-8,700	2,500-8,700
Amps	3.5		6.4	6.4	6.4		8.5	8.5
Rated input watts	400		710	710	710		950	950
Collet bore	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
<b>Standard equipment:</b>								
Collet wrench 17mm	344163990 (19mm)	344160400	344160400	344160400	344160400	344160400	344160400	344160400
- 1/4" collet	631949000	631949000	630821000	630821000	630821000	630821000	630821000	630821000
Spindle wrench 13mm	344164000		344164000					
Side handle						314001030	314001030	314001030
Soft rubber grip	344099150	344099150		344099150	344099150		344099150	344099150
<b>Optional equipment:</b>								
- 1/8" collet	631948000	631948000	631948000	631948000	631948000		631948000	631948000
Side handle	631052000	631052000	631052000	631052000	631052000			

Non-woven



Standard

Interleaved

## Flap Wheels 1/4" Shank Mounted Style for Die Grinders

- Standard - Aluminum oxide on resin fiber backing provides excellent stock removal on contoured steel shapes and in confined areas.

Order#	Size	Spec.	Application	Max. RPM	Pcs/Pkg
655368000	1 x 1	A 60	Steel / Stainless Steel	30,000	10
655369000	1 x 1	A 80	Steel / Stainless Steel	30,000	10
655370000	1 x 1	A 120	Steel / Stainless Steel	30,000	10
655371000	1-1/2 x 1	A 60	Steel / Stainless Steel	25,000	10
655372000	1-1/2 x 1	A 80	Steel / Stainless Steel	25,000	10
655373000	1-1/2 x 1	A 120	Steel / Stainless Steel	25,000	10
655374000	2 x 1	A 60	Steel / Stainless Steel	25,000	10
655375000	2 x 1	A 80	Steel / Stainless Steel	25,000	10
655376000	2 x 1	A 120	Steel / Stainless Steel	25,000	10
655377000	3 x 1	A 60	Steel / Stainless Steel	20,000	10
655378000	3 x 1	A 80	Steel / Stainless Steel	20,000	10
655379000	3 x 1	A 120	Steel / Stainless Steel	20,000	10

- Interleaved - Aluminum oxide flaps are interleaved with strips of non-woven abrasive material to provide a brushed satin finish.

Order#	Size	Spec.	Application	Max. RPM	Pcs/Pkg
655390000	3 x 1	A 80	Steel / Stainless Steel	18,000	5
655391000	3 x 1	A 120	Steel / Stainless Steel	18,000	5
655392000	3 x 1	A 180	Steel / Stainless Steel	18,000	5
655393000	3 x 2	A 80	Steel / Stainless Steel	6,000	5
655394000	3 x 2	A 120	Steel / Stainless Steel	6,000	5

- Non-Woven - Aluminum oxide is bonded to a non-woven fabric to provide an excellent wheel for general deburring and contour surface finishing.

Order#	Size	Spec.	Application	Max. RPM	Pcs/Pkg
655380000	2-3/8 x 1	Fine	Stainless Steel	10,000	5
655381000	2-3/8 x 1	Medium	Stainless Steel	10,000	5
655382000	2-3/8 x 2	Fine	Stainless Steel	8,000	5
655383000	2-3/8 x 2	Medium	Stainless Steel	8,000	5
655384000	3 x 1	Fine	Stainless Steel	8,000	5
655385000	3 x 1	Medium	Stainless Steel	8,000	5
655386000	3 x 2	Fine	Stainless Steel	6,000	5
655387000	3 x 2	Medium	Stainless Steel	6,000	5

### DIE GRINDER ACCESSORIES



627354000 Bench Mount Stand For working with the flex shaft 627107000 Clamp For attaching 627354000 to work bench



655168000 Combo mandrel to mount slicers on die grinders (1/4" shank) 1/4" or 3/8" arbor



628329000 Cage Mount System. For use with all Metabo Die Grinders. (For all except GE710)



655170000 Die Grinder Cut-off Wheel Guard. For use on GE710, GEP710, GE950, GEP950 & GP400) 655169000 Die Grinder Cut-off Wheel Guard. For use on GE700 and GE900 Plus die grinder. Always comply with OSHA/ANSI B7.1



630980420 Flex Shaft

- 4 ft. long, heavy-duty rubber covered flex shaft for use with both die grinder or router motor
- Ball bearing construction
- 1/4" collet for 1/4" shank mounted bits
- Speed range 10,000 to 30,500 RPM (Not for use on tools running less than 10,000 RPM)
- 1/4" Replacement Collet 630978000


## Double Cut Carbide Burs For Drills, Hammer Drills and Die Grinders





- Double cut solid carbide burs are designed to remove metal faster with more control, smaller chips and provides a smoother finish. Each of these double cut burs is individually packaged in a plastic tube.

Order#	Cutting Dia.	Cutter Length	Shank Dia.	Spec.	Application	Pcs/ Pkg
656750000	1/4"	5/8"	1/4"	SA-1	Steel / Stainless Steel	1
656751000	3/8"	3/4"	1/4"	SA-3	Steel / Stainless Steel	1
656752000	1/4"	5/8"	1/4"	SC-1	Steel / Stainless Steel	1
656753000	3/8"	3/4"	1/4"	SC-3	Steel / Stainless Steel	1
656754000	1/2"	1"	1/4"	SC-5	Steel / Stainless Steel	1
656755000	1/2"	7/16"	1/4"	SD-5	Steel / Stainless Steel	1
656756000	1/4"	3/4"	1/4"	SF-1	Steel / Stainless Steel	1
656757000	3/8"	3/4"	1/4"	SF-3	Steel / Stainless Steel	1
656758000	1/2"	1"	1/4"	SF-5	Steel / Stainless Steel	1
656759000	3/8"	1-1/16"	1/4"	SL-3	Steel / Stainless Steel	1

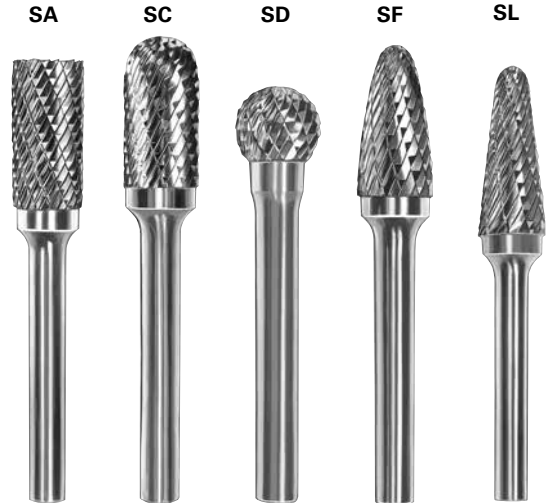
Note: Other sizes and shapes are available upon request.



## Wire End Brushes 1/4" Stem For Drills, Hammer Drills and 316064350s


	Steel Order#	Stainless Order#	Dia.	Trim Length	Stem	Wire	Max RPM	Pkg.	Pcs/ Pkg
 <p>crimped</p>	655212000	655219000	1"	1-1/8"	1/4"	.020 crimped	22,000	Carded	1
 <p>knotted</p>	655213000		1"	3/4"	1/4"	.020 knotted	22,000	Carded	1

## Crimped Wheels 1/4" Stem For Drills and Hammer Drills

	Steel Order#	Stainless Order#	Dia.	Trim Length	Stem	Wire	Max RPM	Pkg.	Pcs/ Pkg
	655214000	655222000	3"	1"	1/4"	.014 crimped	20,000	Carded	1

# STAINLESS STEEL FINISHING

**Metabo Pyramid: The perfect abrasive!**  
**Finest finish. Fastest finish.**

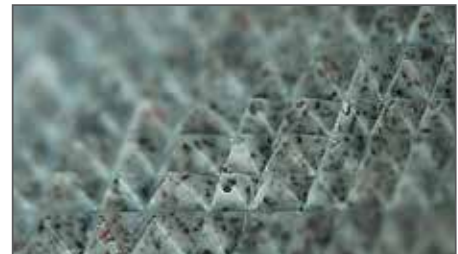

Unique structured abrasive delivers consistent finishes with higher cut rates while remaining cool under pressure. Suited for finishing mild steels, stainless steels, nickel alloys, titanium, aluminum and non-ferrous metals.

Higher cut rates even with the finer grit sizes allows for reduction in steps to reach the final finish. Result, lower overall cost.



Preparation for Polishing; Metabo INOX 5" grinders, 5" 'cling fit' Pyramid sanding discs in grit range from A160 (120 grit) to A30 (600 grit) with 5" backing pad 623298000.



The Pipe and Tube sanders for a uniform even finish on hand rails using Pyramid sanding belts from A160 (120 grit) to A6 (2000 grit).

(tool does not include roller guide)



Preparation for mirror polishing: Metabo Burnishers with expansion roller, and Pyramid sanding belts from A160 (120 grit) to A6 (2000 grit).



**CORDED**  
**Burnisher**  
SE 17-200 RT



**CORDLESS**  
**18V Burnisher**  
S 18 LTX 115

Model	SE 17-200 RT 602259620
Double insulated	•
Electronics	Vario-tacho-constamatic (VTC)
Motor	LongLife
Toolless wheel change system	•
Spindle lock	•
Winding protection grid	•
High performance planetary gears	•
Variable speed controlled by adjusting dial	•
Auto-stop carbon brushes	•
Maximum torque	151 inch lbs.
No-load speed (RPM)	800-3,000
Amps	14.5
Rated input watts	1,700
Spindle thread	5/8"-11
Arbor Size	3/4" keyed
Carrying case	344453970 (standard)
<b>Standard equipment:</b>	Case (344453120) 1 - Allen key (344161300) 1 - Expansion roll for grinding and polishing sleeves (623470000) 3 - P80 Sanding belt (623474000) 1 - P80 Flap wheel (623479000) 1 - 4" x 4" P180 interleaved (623485000) 1 - 4" x 4" P280 non-woven nylon wheel (623514000) 1 - Set of spacer rings (623511000) 1 - 3/4" Arbor complete (316052560)
<b>Optional equipment:</b>	2" Spindle (626413000)

Model Bare Tool:	S 18 LTX 115 600154850
Electronic clutch	•
Electronic overload protection	•
Switch with lock on capability*	•
Power interruption protection	•
Electronic soft start	•
Spindle lock	•
Rotatable battery pack	•
Detachable dust filter	•
Spindle thread	M14
Arbor size	3/4" keyed
Max diameter of accessories	8"
Max width of accessories	4"
No-load speed (RPM)	3,000
<b>Standard equipment:</b>	M14 Arbor Complete (316052550) Dust filter (343398890) 19 mm wrench (344161300) Allen key (344161300)



See burnisher accessories page 100



Model	RBE 15-180 602243620
Electronics	Vario-tacho-constamatic (VTC)
LongLife motor	•
Switch with lock on capability	•
Power interruption protection	•
Spindle lock	•
Low profile aluminum die-cast gear housing	•
Variable speed dial	•
Ergonomic side handle	•
Electronic winding temperature monitor with LED display	•
Auto-stop carbon brushes	•
Winding protection grid	•
Electronic soft start feature	•
Electronic speed stabilization	•
Maximum pipe / tube dia.	7"
Dimensions of grinding belt	1-1/2" x 30"
Wrap angle (maximum)	270°
No-load speed	1,650-5,512 ft./min
Amps	13.5
Rated input watts	1,550
Carrying case	344453970 (standard)
<b>Standard equipment:</b>	Side handle (316046590)
	10 (pcs) Zirconia alumina sanding belts P80 (626306000)
	2 (pcs) Pyramid sanding belts P280/A65 (626312000) P400/A45 (626313000) P600/A30 (626314000) P1200/A16 (626315000)
	3 (pcs) Non-woven medium (626320000)

Model Bare Tool:	RB 18 LTX 60 600192850
Electronic clutch	•
Electronic overload protection	•
Switch with lock on capability*	•
Power interruption protection	•
Electronic soft start	•
Spindle lock	•
Rotatable battery pack	•
Detachable dust filter	•
Wheel/belt size	1-3/16 x 21
No-load speed (SFM)	1, 812
<b>Standard equipment:</b>	Dust filter (343398890)
	Hex key (344161510)



See pipe tube sander accessories page 103





**CORDED**  
**Fillet Weld Grinder/Finisher**  
 KNSE 9-150



**CORDLESS**  
**18V Fillet Weld Grinder/Finisher**  
 KNS 18 LTX 150

Model	KNSE 9-150 602265620
Electronics	Vario-tacho-constamatic (VTC)
Motor	LongLife
Switch with lock on capability	•
Power interruption protection	•
Spindle lock	•
Low profile aluminum die-cast gear housing	•
Variable speed dial	•
Adjustable guard	•
Ergonomic side handle	•
Electronic winding temperature monitor with LED display	•
Auto-stop carbon brushes	•
Winding protection grid	•
Electronic soft start feature	•
Electronic speed stabilization	•
No-load speed (RPM)	900-3,800
Amps	8.5
Rated input watts	950
Wheel size / arbor	6" x 1"
Spindle thread	M14
Carrying case	344453990 (standard)
<b>Standard equipment:</b>	Side handle (316046590) Wheel guard (339203590) Flange set (316047400) Hex wrench (344161510) Spanner wrench (623934000) 1 (pc) Fleece compact disc (6" x 1/4" x 1", medium) (626402000) (6" x 1/4" x 1", very fine) (626401000) (6" x 1/8" x 1", medium) (626400000)

Model	KNS 18 LTX 150 600191850
<b>Bare Tool:</b>	
Electronic clutch	•
Electronic overload protection	•
Switch with lock on capability*	•
Power interruption protection	•
Electronic soft start	•
Spindle lock	•
Rotatable battery pack	•
Detachable dust filter	•
Spindle thread	M14
Arbor size	1"
Wheel/belt size	6" dia.
Max diameter of accessories	6"
No-load speed (RPM)	3,800
<b>Standard equipment:</b>	Dust filter (343398890) Flange set (316047400) Hex wrench (344161510) Spanner wrench (623934000) Side handle (316046590)



See fillet weld grinder / finisher accessories page 104




**CORDED  
Band File  
BFE 9-20**



**CORDLESS  
18V Band File  
BF 18 LTX 90**

Model	BFE 9-20 602244620
Electronics	Vario-constamatic (VC)
Motor	LongLife
Quick belt change system	•
Switch with lock on capability	•
Spindle lock	•
Low profile aluminum die-cast gear housing	•
Ergonomic side handle	•
Metabo safety slip clutch	•
Auto-stop carbon brushes	•
Winding protection grid	•
Sanding belt size	1/4", 1/2", 3/4" x 18"
No-load speed (SFM)	2,087-3,937
Amps	8.5
Rated input watts	950
Useful length of grinding belt arm	3-1/2"
Carrying case	344453980 (standard)
<b>Standard equipment:</b>	Side handle (316046590)
	10 (pcs) Zirconia alumina sanding belts 1/4" x 18" P60 (626345000) P120 (626347000) 3/4" x 18" P60 (626353000) P120 (626355000)
	2 (pcs) 1/4" x 18" medium non-woven (626384000)
	Grinding arm - for belt widths of 1/4" and 1/2" (626379000) 3/4" (626382000)
<b>Optional equipment:</b>	(See page 105)

Model Bare Tool:	BF 18 LTX 90 600321850
Electronic clutch	•
Electronic overload protection	•
Switch with lock on capability*	•
Power interruption protection	•
Electronic soft start	•
Spindle lock	•
Rotatable battery pack	•
Detachable dust filter	•
Wheel/belt size	1/4", 3/8", 1/2" x 18"
No-load speed (SFM)	1,576
<b>Standard equipment:</b>	Dust filter (343398890)
	Side handle (316046590)
	Grinding arm - for belt widths of 1/4" and 1/2" (626379000)
<b>Optional equipment:</b>	(See page 105)

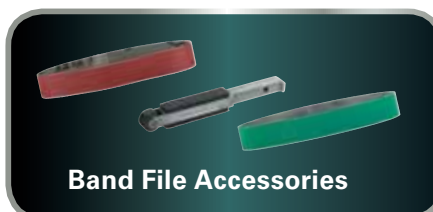

**Band File Accessories**

See band file accessories page 105

## Inox Angle Grinder Accessories

### Special non-woven - VKS (with bore)



- Made from pressed fleece material on glass fiber supporting plate
- Reduces the number of working stages required. For cleaning and polishing surfaces, for smoothing weld seams
- For steel, stainless, alloy and high-alloy steels, colored and light metals, chrome and nickel steels, titanium, steels

Diameter inches	Grit	Pcs/Pkg	Order #
5" x 7/8"	Very fine	1	626368000
5" x 7/8"	Very fine	5	626417000

### Combi Flap disc (KLS)



- Made from high-quality pink aluminum oxide fabric in combination with high-quality nonwoven nylon abrasive
- For removal of rough material to fine polish in a single process. Very even grinding results with good material removal
- For processing weld seams on flat or rounded surfaces. For removing minor scratches and damage to the work piece
- Suitable for grinding, cleaning and finishing work on stainless steel, steel, color and light metals, titanium alloys

Diameter inches	Grit	Pcs/Pkg	Order #
5" x 7/8"	Coarse	1	626369000
5" x 7/8"	Coarse	5	626415000
5" x 7/8"	Medium	1	626370000
5" x 7/8"	Medium	5	626416000

### "Pyramid" cling-fit sanding discs



- 3-dimensional structure of the grinding media (pyramid-shaped)
- High volume output with very even and fine sanding results at the same time. Long service life. Faster progress when compared to traditional sanding media, due to the reduced number of working stages
- For removing scratches, mill skin on stainless steel. Preparation for polishing
- Suitable for use on all metals; especially for stainless steels, titanium, cobalt, nickel, chrome alloys

Diameter inches	Grit	Pcs/Pkg	Order #
5"	P 120 (A 160)	5	626371000
5"	P 280 (A 65)	5	626372000
5"	P 400 (A 45)	5	626373000
5"	P 600 (A 30)	5	626374000
5"	P 1200 (A 16)	5	626403000
5"	P 2000 (A 6)	5	626404000

### Special non-woven disc - VKS cling-fit



- Made of compacted fleece material hook and loop backing
- Reduces the number of working stages required. For cleaning and polishing surfaces, for smoothing weld seams
- For steel, stainless, alloy and high-alloy steels, color and light metals, chrome and nickel steels, titanium, steels

Diameter inches	Grit	Pcs/Pkg	Order #
5"	Very fine	1	626375000

### Stripping wheels



- For the removal of light rust, paint / varnish on metal, cleaning weld seams / steel / copper / aluminum / brass, sanding steel and texturing wood
- Maximum working speed: 63 m/s
- Recommended speeds at Ø 115 mm: 2,900 /min, Ø 125 mm: 2,700 /min

Diameter inches	Grit	Pcs/Pkg	Order #
4.5" x 7/8"	Medium	1	624346000
5" x 7/8"	Medium	1	624347000

### Cling-fit backing pad



- 5" x 5/8-11

Order #  
623298000

### Micro fiber cloth



- 3 micro-fiber cloths
- For cleaning and evenly distributing protective spray and polishes
- For removing paste residue using talcum powder
- Suitable for all metals and hard plastics

Order #  
626398000

## Burnisher Accessories

### Expansion roller



- For using sanding belts and abrasive sleeves. The belts / abrasive sleeves are pushed over the roller and clamped securely by centrifugal force. Aggressive metal removal.

Diameter inches	Order #
4" x 4"	623470000

### Pneumatic sanding drum



- For using sanding belts and abrasives sleeves. The sanding belts / abrasive sleeves are pushed over the drum and clamped securely by pneumatic force. Fine metal finishing.

Diameter inches	Order #
4" x 4"	623542000

### Sanding belts



- Material: zirconia alumina
- Suitable for all metals and stainless steel
- For removing scratches and smoothing weld seams

Diameter inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 40	10	623512000
4" x 4"	P 60	10	623473000
4" x 4"	P 80	10	623474000
4" x 4"	P 120	10	623475000
4" x 4"	P 220	10	623476000

### Felt Flap Rolls



- Patented flap design made with 70% wool felt material. Designed to be used in combination with a rouge or compound that can produce a mirror surface finish. The flap construction increases flexibility and runs cooler, for overall better performance.

(Medium version: Flaps are slit lengthwise to create a mop effect. This increases the flexibility of the material for polishing irregular or contoured surfaces.)

Diameter inches	Version	Pcs/Pkg	Order #
4-1/4" x 4" x 5/8-11	Medium	1	656790000
4-1/4" x 4" x 5/8-11	Fine	1	656791000

### Non-woven sinus wheel



- For transition-free matt and satin-finishes on stainless steel surfaces and non-ferrous metals
- For removing minor scratches and for cleaning surfaces
- Elastic nylon fleece containing grit with a corrugated arrangement on the core
- Maximum speed: 5,900 /min; recommended speed: 3,000 /min

Diameter inches	Grit	Order #
4" x 4"	P 180	623567000


### Nylon non-woven abrasive sleeves



- For removing scratches and oxide layers, tarnishing, graining, deburring and fine grinding

Diameter inches	Version	Pcs/Pkg	Order #
4" x 4"	Coarse (brown)	2	623519000
4" x 4"	Medium (maroon)	2	623495000
4" x 4"	Fine (blue)	2	623496000

### "Pyramid" sanding belts



- For all metal uses, suited for processing steel/stainless steel and aluminum
- 3-dimensional structure of the grinding media (pyramid-shaped). High removal of material with an even and fine grinding finish
- Quick progress; considerably reduces working stages compared to traditional grinding methods

Diameter inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 120 (A 160)	5	626405000
4" x 4"	P 280 (A 65)	5	626406000
4" x 4"	P 400 (A 45)	5	626407000
4" x 4"	P 600 (A 30)	5	626408000
4" x 4"	P 1200 (A 16)	5	626409000
4" x 4"	P 2000 (A 6)	5	626410000

### Flap wheels



- For removing rust, oxide layers, scratches
- For texturing and graining metal

Diameter inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 40	1	623477000
4" x 4"	P 60	1	623513000
4" x 4"	P 80	1	623479000
4" x 4"	P 120	1	623480000
4" x 4"	P 180	1	623481000
4" x 4"	P 240	1	623482000

### Interleaved wheels



- Pink aluminum oxide sanding flaps combined with grain-coated non-woven nylon
- For tarnishing, graining and removing scratches on metal

Diameter inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 60	1	623483000
4" x 4"	P 80	1	623484000
4" x 4"	P 180	1	623485000
4" x 2"	P 60	1	623526000
4" x 2"	P 80	1	623527000
4" x 2"	P 180	1	623528000

## Burnisher Accessories

### Non-woven nylon abrasive wheels



- Elastic grain-coated nylon web for shadow-free tarnishing, graining and polishing of stainless steel and non-ferrous metals

Diameter inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 60	1	623486000
4" x 4"	P 80	1	623487000
4" x 4"	P 180	1	623488000
4" x 4"	P 280	1	623514000
4" x 4"	P 400	1	623468000
4" x 4"	P 600	1	623469000
4" x 4"	P 900	1	623494000
4" x 2"	P 60	1	623515000
4" x 2"	P 80	1	623516000
4" x 2"	P 180	1	623517000

### Hard stripping wheel



- For cleaning and descaling weld seams
- Removing rust, oxide layers and paint
- Strong longitudinal grinding of stainless steel

Dimensions inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 46	1	623525000

### Rubberized abrasive wheels



- Rubberized silicone carbide abrasive grain coating
- For removing small scratches. For bright shining, decorative longitudinal grinding of stainless steel and non-ferrous metals

Diameter inches	Grit	Pcs/Pkg	Order #
4" x 4"	P 60	1	623510000
4" x 4"	P 180	1	623499000

### Cotton web polishing rings



- For pre-polishing non-ferrous steel in conjunction with the brown polishing paste 623522000
- Size: 4" x 3/8"
- Type: hard
- Pcs/Pkg: 8

Order # 623508000



- For high-gloss polishing of all metals in conjunction with the blue polishing paste 623524000
- Size: 4" x 3/8"
- Type: soft
- Pcs/Pkg: 8

Order # 623509000

### Sisal polishing rings



- For pre-polishing steel and stainless steel in conjunction with the white polishing paste 623520000
- Size: 4" x 1/2"
- Type: impregnated
- Pcs/Pkg : 5

Order # 623507000

### Polishing paste, white



- For pre-polishing and polishing steel and stainless steel in conjunction with sisal polishing rings, for example, 623507000

Order # 623520000

### Polishing paste, brown



- For pre-polishing and polishing non-ferrous metals in conjunction with cotton web polishing rings, for example, 623508000

623522000

### Polishing paste, blue



- For high-gloss polishing of all metals in conjunction with cotton web polishing rings, for example, 623509000

623524000

### Steel-wire wheel brushes



- Ideal for removing rust, deburring and cleaning metal

Diameter inches	Width inches	Wire thickness	Order #
4"	2-3/4"	.010 mm	623501000

### Stainless steel-wire wheel brushes



- With stainless wire. For cleaning weld seams, deburring, removing rust, roughening

Diameter inches	Width inches	Wire thickness	Order #
4"	2-3/4"	.008 mm	623503000

### Plastic wheel brushes




- Elastic, grain-coated wheel brush for roughening and deburring metal

Diameter inches	Width inches	Order #
4"	2-3/4"	623505000

## Burnisher Accessories


**3 spacer rings**



- For width compensation when using grinding rollers, brushes, polishing rings

**Order #**  
623511000


**Sanding belt driver**



- With smooth surface for non-slip work with grinding belts, nylon web and felt band
- Size: 3-3/8" x 2-3/4"

**Order #**  
623529000


**Guard/Spindle Accessory**



- 2" Guard/Spindle accessory

**Order #**  
626413000


**Sanding belts**



- Pink aluminum oxide
- For sanding/grinding, descaling, derusting and smoothing of pipe and tube
- Use in combination with the sanding belt roll 623529000
- Can be resealed with adhesive tape 623530000

Length inches	Width inches	Grit	Pcs/Pkg	Order #
23-5/8"	1-3/16"	P 40	10	623532000
23-5/8"	1-3/16"	P 60	10	623533000
23-5/8"	1-3/16"	P 120	10	623534000
23-5/8"	1-3/16"	P 240	10	623535000


**Adhesive tape**



- For re-closing the sanding belts

**Order #**  
623530000


## Non-woven nylon web bands



- For fine grinding or polishing, also on "closed" pipe constructions
- Recloseable by "buttonhole closure"
- Use in combination with the sanding belt roll 623529000

Length inches	Width inches	Grit	Pcs/Pkg	Order #
26"	1-3/16"	coarse (brown)	3	623536000
26"	1-3/16"	medium (maroon)	3	623537000
26"	1-3/16"	fine (blue)	3	623538000
26"	1-3/16"	super fine (grey)	3	623539000


## Felt band



- For polishing work, also on "closed" pipe constructions
- Can be used on both sides
- Recloseable by "buttonhole closure"
- Use in combination with the sanding belt roll 623529000

**Order #**  
623541000

## Stainless steel adhesive tape



- 1-9/16" W x 8' 4" L x .20 Thick, self-adhesive

**Order #**  
626376000

## Pipe / Tube Belt Sander Accessories

### Aluminum oxide sanding belts



- Suitable for use throughout the metal industry
- Grinding material with sturdy cotton base
- Good cutting output with good tool life
- Even grinding results

RBE15-180 (Belt Size: 1-1/2" x 30)			RB18 LTX 60 (Belt Size: 1-3/16" x 21")
Grit	Order #	Pcs/Pkg	Order #
P 120	626300000	10	626279000
P 180	626301000	10	626280000
P 240	626302000	10	626281000
P 320	626303000	10	626282000
P 400	626304000	10	626283000

### Zirconia alumina sanding belts



- For all metal uses, particularly suited to the processing of stainless steel
- Grinding material with cotton backing
- Fast cutting with good life
- For rough finishing and deburring of steel and stainless steel

RBE15-180 (Belt Size: 1-1/2" x 30)			RB18 LTX 60 (Belt Size: 1-3/16" x 21")
Grit	Order #	Pcs/Pkg	Order #
P 60	626305000	10	626284000
P 80	626306000	10	626285000
P 120	626307000	10	626286000

### Ceramic grain sanding belts



- For all metal uses, particularly suited to the processing of stainless steel
- Fast cutting with extremely long life thanks to the self-sharpening ceramic grain
- For rough finishing and deburring of steel and stainless steel

RBE15-180 (Belt Size: 1-1/2" x 30)			RB18 LTX 60 (Belt Size: 1-3/16" x 21")
Grit	Order #	Pcs/Pkg	Order #
P 60	626308000	10	626287000
P 80	626309000	10	626288000
P 120	626310000	10	626289000

### "Pyramid" sanding belts



- For all metal uses, particularly suited to the processing of stainless steel
- 3-dimensional structure of the grinding media (pyramid-shaped). High removal of material with a very even and fine grinding result for the entire lifetime of the product
- Fastest finish; considerably reduces working time compared to traditional grinding methods

RBE15-180 (Belt Size: 1-1/2" x 30)			RB18 LTX 60 (Belt Size: 1-3/16" x 21")
Grit	Order #	Pcs/Pkg	Order #
P 120 (A 160)	626311000	5	626290000
P 280 (A 65)	626312000	5	626291000
P 400 (A 45)	626313000	5	626292000
P 600 (A 30)	626314000	5	626293000
P 1200 (A 16)	626315000	5	626294000
P 2000 (A6)	626316000	5	626295000

### Non-woven nylon web belts



- For grinding, cleaning and finishing work  
For removing scratches, color runs and oxide layers
- For preparing, pre-grinding and polishing weld seams

RBE15-180 (Belt Size: 1-1/2" x 30)			RB18 LTX 60 (Belt Size: 1-3/16" x 21")
Grit	Order #	Pcs/Pkg	Order #
Coarse (brown)	626319000	3	626296000
Medium (maroon)	626320000	3	626297000
Very fine (blue)	626322000	3	626298000

### Felt belt



- For polishing stainless steel and non-ferrous metals, always in conjunction with a polishing paste

RBE15-180 (Belt Size: 1-1/2" x 30)			RB18 LTX 60 (Belt Size: 1-3/16" x 21")
Grit	Order #	Pcs/Pkg	Order #
Soft	626323000	1	626299000

### Polishing paste, white



- For pre-polishing and polishing steel and stainless steel in conjunction with sisal polishing rings, for example, 623507000

Order #  
623520000

### Polishing paste, brown



- For pre-polishing and polishing non-ferrous metals in conjunction with cotton web polishing rings, for example, 623508000

623522000

### Polishing paste, blue



- For high-gloss polishing of all metals in conjunction with cotton web polishing rings, for example, 623509000

623524000

### Micro fiber cloth



- 3 micro-fiber cloths
- For cleaning and evenly distributing protective media and polishes, for removing pastes and cream residue
- Suitable for all metals and hard plastics

Order #  
626398000

## Fillet Weld Grinder Accessories

### Compressed non-woven nylon discs - VKS



- Made of compressed nylon on a fiberglass disc
- For cleaning and polishing surfaces, for smoothing weld seams; reduces the number of working stages required
- For alloy and high-alloy steels, colored and light metals, chrome and nickle steels, titanium, stainless steels

Dimensions inches	Grit	Pcs/Pkg	Order #
6" x 1/8" x 1"	Medium	1	626400000
6" x 1/4" x 1"	Very fine	1	626401000
6" x 1/4" x 1"	Medium	1	626402000

### Felt disc



- For polishing stainless steel and non-ferrous metals, always in conjunction with a polishing paste

Dimensions inches	Grit	Pcs/Pkg	Order #
6" x 3/16" x 1"	Soft	1	626395000

### Micro-fiber cloth



- 3 micro-fiber cloths
- For cleaning and evenly distributing protective media and polishes, for removing pastes and cream residue
- Suitable for all metals and hard plastics

**Order #**  
626398000

## Polisher Accessories




### Hook and loop backing pads



- Hook & loop-faced, for attaching polishing and sanding accessories

Diameter inches	Pcs/Pkg	Order no.
5" Soft backing pad	1	655141000
5" Medium backing pad	1	655129000
5" Hard backing pad	1	623298000
7" Hard backing pad	1	655143000

### 5" Hook and loop backed accessories

Diameter inches	Description	Pcs/Pkg	Order no.
 5"	Cling-fit intermediate disc for uneven surfaces	1	631216000
 5"	Polishing sponge	1	631222000
 5"	Lambs wool buff	1	631223000



## Band File Accessories

### Aluminum oxide sanding belts



- Suitable for use on metals or wood
- Good removal rate with good belt life
- Consistent results

Grit	Pcs/Pkg	Order no. 1/4 x 18	Order no. 1/2 x 18	Order no. 3/4 x 18
P 40	10	626326000	626332000	626338000
P 60	10	626327000	626333000	626339000
P 80	10	626328000	626334000	626340000
P 120	10	626329000	626335000	626341000
P 240	10		626337000	

### Zirconia alumina sanding belts



- For all metal uses, particularly suited to the processing of steel/stainless steel
- Excellent removal rate and long belt life
- For rough finishing and deburring

Grit	Pcs/Pkg	Order no. 1/4 x 18	Order no. 1/2 x 18	Order no. 3/4 x 18
P 40	10	626344000	626348000	626352000
P 60	10	626345000	626349000	626353000
P 80	10	626346000	626350000	626354000
P 120	10	626347000	626351000	626355000

### Ceramic grain sanding belts



- For all metal uses, particularly suited to the processing of steel/stainless steel
- Extremely high removal rate with excellent belt life due to self sharpening ceramic grains
- For rough and medium finishing and deburring

Grit	Pcs/Pkg	Order no. 1/4 x 18	Order no. 1/2 x 18	Order no. 3/4 x 18
P 40	10	626356000	626360000	626364000
P 60	10	626357000	626361000	626365000
P 80	10	626358000	626362000	626366000
P 120	10	626359000	626363000	626367000

### Non-woven nylon web bands



- For grinding, cleaning and finishing work
- For removing scratches, color runs and oxide layers
- For preparing, pre-grinding and polishing weld seams

Grit	Pcs/Pkg	Order no. 1/4 x 18	Order no. 1/2 x 18	Order no. 3/4 x 18
Coarse (brown)	5	626383000	626387000	626391000
Medium (maroon)	5	626384000	626388000	626392000
Very fine (blue)	5	626386000	626390000	626394000

### Sanding belt arms



- Suitable for sanding belts 1/4 x 18 in. and 1/2 x 18 in.
- For sanding narrow areas, weld seams, deburring edges
- Work on flat or curved surfaces

**Order #**  
626379000




- Suitable for sanding belts 1/4 x 18 in.
- For sanding narrow areas, edges, deburring pipe and tube
- Work on flat surfaces

626380000



- Suitable for sanding belts 1/2 x 18 in.
- For sanding edges, deburring pipes, sanding welds
- Work on flat surfaces

626381000



- Suitable for sanding belts 3/4 x 18 in.
- For grinding edges and surfaces
- Work on flat surfaces

626382000

### Micro-fiber cloth



- 3 micro-fiber cloths
- For cleaning and evenly distributing protective media and polishes
- For removing pastes and cream residue
- Suitable for all metals and hard plastics

**Order #**  
626398000

# BENCH GRINDERS



**DS 150**  
6" Bench Grinder



**DS 175**  
7" Bench Grinder



**DS 200**  
8" Bench Grinder



**DSD 250**  
10" Bench Grinder

Model	DS 150 619150420	DS 175 619175420	DS 200 619200420	DSD 250 619250420
Magnetic switch with Restart protection		•	•	•
Toolless stamped steel tool rest	•	•	•	•
Steel guard, quick opening	•			
Steel guard with dust collection port		•	•	•
Maintenance free induction motor	•	•	•	•
Large toolless adjustable spark guards	•	•	•	•
Vibration absorbing rubber mounts	•	•	•	•
Maximum torque	18 inch lbs.	18 inch lbs.	21 inch lbs.	53 inch lbs.
Motor power	120V, 60 Hz, single phase	120V, 60 Hz, single phase	120V, 60 Hz, single phase	120V, 60 Hz, single phase
No-load speed (RPM)	3,570	3,570	3,570	1,780
Amps	3.8	3.7	4.8	7.5
Rated input watts	450	500	600	900
Arbor size	1/2"	1"	1-1/4"	1-1/4"
Tool weight	22 lbs.	32 lbs.	36 lbs.	74 lbs.
Shipping weight	24 lbs.	36.5 lbs.	41 lbs.	80 lbs.
Length	13.5"	16"	17.3"	20.8"
<b>Standard equipment:</b>	Hex wrench	Hex wrench	Hex wrench	Hex wrench
	36 Grit wheel (6"x3/4"x1/2")	36 Grit wheel (7" x 1" x 1")	36 Grit wheel (8" x 1"x 1-1/4")	36 Grit wheel (10" x 1-1/2" x 1-1/4")
	60 Grit wheel (6"x3/4"x1/2")	60 Grit wheel (7" x 1" x 1")	60 Grit wheel (8" x 1"x 1-1/4")	60 Grit wheel (10" x 1-1/2" x 1-1/4")

**BENCH GRINDER ACCESSORIES**


Floor Stand  
with storage slots and water cup.

**Order #**  
623867000




Wall Mount Bracket  
Suitable for 7" or 8" bench grinders.

**Order #**  
623862000



**Wire Wheels for Bench Grinders**

	Steel Order#	Dia. x Face	Trim Length	Arbor	Wire	Max RPM	Pkg.	Pcs/ Pkg
	655216000	6" x 3/4"	1-1/4"	1/2"-5/8"	.014 crimped	6,000	Boxed	1
	655217000	8" x 3/4"	2-1/8"	5/8"	.014 crimped	6,000	Boxed	1



Quick release adjustable vise adds versatility.

**CS 23-355**  
14" Chop Saw

Model	CS 23-355 602335420
Lock-off button for safety	•
Spindle lock for convenient wheel changes	•
Pivoting wheel guard	•
All ball bearing construction for long life	•
Auto-stop carbon brushes (externally accessible)	•
Durable steel base	•
Maximum vise open	9 3/8"
Maximum cutting capacity	
- bar	2 1/2"
- pipe	5"
- section steel	4 1/2" x 5 1/8"
No-load speed (RPM)	4,100
Amps	15
Rated input watts	2,300
Arbor size	1"
Vise angle (adjustable)	0°-45°
Tool weight	38 lbs.
Shipping weight	43 lbs.
Standard equipment:	344163520 wrench

### Type 1 Cutting Wheels for Chop Saws



Order #	Size	Max. RPM	Pcs/Pkg	Formula	Wheel
616340000	14 X 3/32 X 1	4,300	10	A24M	Original
655236000	14 X 3/32 X 1 Internal Reinforced	4,300	10	A30P	Original
616215000	16 X 3/32 X 1	3,820	10	A24M	Original
616337420	12 X 3/32 X 1	5,100	10	A30R	Original Long Life
616146000	14 X 3/32 X 1	4,300	10	A30S	Original Long Life



See cordless drills page 26



**BEV 1300-2**  
1/2" 2-Speed Drill



**BE 75-16**  
1/2" Triple Gear Reduction  
Drill High Torque

Model	BEV 1300-2 600574420	BE 75-16 600580420
Electronics	Vario-tacho-constamatic	Variospeed
Aluminum die-cast gear housing	•	•
Gear-box	2-speed	Triple gear reduction
High torque, e.g. for use with auger bits up to 2" in dia.		•
Rubber coated comfort grip	•	•
Safety non-slip side handle	•	•
Reversing switch	•	•
Chuck	1/2" Geared (635250000)	1/2" Geared (635250000)
Metabo mechanical slip clutch	•	•
Swivel cord connection	•	
Auto-stop carbon brushes	•	•
Winding protection grid	•	•
Extra long, safety non-slip side handle	•	•
Switch locking catch, equally accessible to right & left hand		•
Overload protection	•	
Power interruption protection	•	
Maximum tightening torque	390 inch lbs.	664 inch lbs.
Capacity		
- in mild steel	5/8"	5/8"
- in softwood	1 9/16"	2"
No-load speed (RPM)	0-1,100/0-3,100	0-650
Amps	9.6	6.7
Rated input watts	1,100	750
Chuck capacity	1/2"	1/2"
<b>Standard equipment:</b>	Chuck key (635167000) Side handle (314001030) 1/2 geared chuck (63525000)	Chuck key (635167000) Side handle (314001030) 1/2 geared chuck (63525000)

# DRILL PRESSES

**CORDED  
MAG 32**  
1-1/4" Electromagnetic Drill Press



**CORDED  
MAG 50**  
2" Electromagnetic Drill Press



Model	MAG 32 600635620	MAG 50 600636620
Vario tacho constamatic (VTC) electronics		•
LongLife motor	•	•
Aluminum die-cast gear housing	•	•
2-speed gear-box		•
LED Light illuminates drilling path	•	•
Variable speed dial		•
Reversing switch (for tapping)		•
Electronic overload protection		•
Power interruption protection		•
Integrated coolant container	•	•
Maximum torque	443 inch lbs.	797 inch lbs. / 443 inch lbs.
Capacity		
- in mild steel w/ annual cutters	1-1/4"	2"
- in mild steel w/ solid bits	1/2"	13/16"
Maximum drilling depth	2"	2"
Thread cutting	n/a	5/8" Max.
No-load speed (RPM)	700	100-250/200-450
Amps	9	11.9
Rated input watts	1,000	1,200
Bit retention	Weldon 3/4"	Morse taper MT2, Weldon 3/4"
Dimensions of magnetic base	3-9/16" x 7-1/2"	3-9/16" x 7-1/2"
Stroke	6-5/16"	6-5/16"
Height at highest position	19"	24"
Height at lowest position	13.3"	18"
Tool weight	22.5 lbs.	28 lbs
Shipping weight	30.5 lbs.	36 lbs.
Carrying case	344453960 (standard)	344453960 (standard)
<b>Standard equipment:</b>	Safety strap (341148140)	Safety strap (341148140)
	Allen wrench (344163630)	Allen wrench (344163620)
	Weldon 3/4" chuck	MT2 drift key (642395000)
	Centering pin 3" (626608000)	Weldon 3/4" industrial tool holder (316046240)
		Centering pin 3" (626608000)
		Centering pin 4" (626609000)
<b>Optional equipment:</b>		
Universal cutting spray	(626606000)	(626606000)
Weldon 3/4" to 1/2" chuck adaptor	(626611000)	(626611000)
Adaptor for weldon to FEIN quick IN	(626600000)	(626600000)
	Centering pin 3" (626608000)	Quick change weldon 3/4" tool holder (626604000)



DRILL ACCESSORIES



**600890000 Drill Stand**  
Adjustable depth guide.  
Tool clamp dia.: 43 mm  
Stroke: 2 9/16"  
Distance - center to column: 6 1/2"  
Base dimensions: 8 5/8" x 8 3/8"



**627256000 X3 Attachment**  
Multiplies torque by 3 times for tasks that demand more power. Fits the BS18 LTX BL Quick, BE1100 or BE75-16 with chucks removed.



**626611000 Weldon 3/4" to 1/2-20 Chuck Adaptor**  
Allows use of any chuck with 1/2-20 mounting threads.



**626600000 Adaptor for Weldon to FEIN Quick IN**



**626608000 Centering pin 3"**  
**626609000 Centering pin 4"**



**626604000 Quick change Weldon 3/4" tool holder**  
Toolless cutter change.



**Concrete / Stone Surface Prep**

**Masonry Cutting**

**Concrete / Masonry Drilling & Breaking**

**OSHA  
COMPLIANT**

See page 122-123 for vacuum and accessories





05



# Concrete & Masonry Solutions

- Full range of OSHA Compliant\* dustless solutions (tools, vacuum and shrouds)
- Specially designed systems to outperform the applications
- Powerful, light weight tools
- High torque for demanding applications
- Wide ranges of available accessories
- Ergonomically designed

\*CFR 1926.1153 for respirable crystalline silica

# METABO COMPLIANT SYSTEMS



**THE HEART OF THE DUSTLESS SYSTEM**  
**157 CFM, NO SUCTION LOSS WHEN IN SELF CLEANING MODE**

**MADE IN GERMANY**

Power dial: Adjust to provide tool with proper power/amp supply

Durable wheels: Large rear wheels. Front wheels swivel and can lock for ease of use

Electromagnetic cleaning process: Vacuum maintains suction while cleaning



- Mode selection dial
- Tool outlet: The vacuum starts and stops automatically when the tool is turned on/off
- Flip door release
- WET / DRY Capable
- Hose locking system: The vacuum can be pulled across the job site

**9** GALLON CAPACITY

**157** CFM AIRFLOW

**ACCESSORIES**

Fleece Pre-filter Bags (5) 630343000	PE Collection Bags (5) 630325000	Paper Filter Bags (5) 631935000	1-1/2" x 13' Anti-static Suction Hose 631370000	Standard Polyester Filter Set (2) 631934000	HEPA filter set (2) 630326000

**TABLE 1 COMPLIANT**

**SURFACE GRINDING / PREPARATION**

RFEV 19-125 RT	5" Variable Speed Concrete Grinder RSEV 19-125 RT	5" Variable Speed Concrete Grinder RSEV 17-125 Set

**NEW**

**AUTO CLEAN VACUUM**

**157 CFM**

**ASR 35 ACP HEPA Auto-Clean HEPA Vacuum**  
602057800

**TABLE 1 COMPLIANT**

**CUTTING / SCORING / TUCKPOINTING / CHASING**

5" Concrete Cutter Set T 13-125 CED Set	5" TuckPoint Set T 13-125 TuckPoint Set	Wall Chaser MFE 40

**NEW**

# FLEXIBILITY FOR MEETING OSHA CFR 1926.1153

TABLE 1 COMPLIANT  
GRINDING / CUTTING / SCORING

## ANGLE GRINDERS



4 1/2" / 5" Angle Grinder  
W 1100-125



4 1/2" / 5" Angle Grinder  
WP 1100-125



Electronic Variable Speed  
4 1/2" / 5" Angle Grinder  
WEV 11-125



Electronic Variable Speed  
4 1/2" / 5" Angle Grinder  
WEV 15-125 Quick



Electronic 5" Angle Grinder with  
Non-locking Paddle Switch, Brake,  
Auto-balance and Drop Secure  
WEPBA 17-125 Quick DS



Electronic Variable Speed  
6" Angle Grinder  
WEV 15-150 HT



Electronic Variable Speed  
4 1/2" / 5" Angle Grinder  
WEV 15-125 HT

## SHROUDS



GED Grinding  
Shroud  
626732000



5": For all current  
small professional  
angle grinders  
655153000



5" Clip-on Dustless  
Cutting Shroud  
630401000



CED 125 Plus Anti-Static Cutting  
Shroud with rolling guides  
626731000



Dustless Tuckpoint Guard  
Fits all professional angle grinders  
628216000

## AUTO-CLEAN VACUUM



157  
CFM



ASR 35 ACP HEPA  
Auto-Clean HEPA Vacuum  
602057800

TABLE 1 COMPLIANT  
DRILLING SOLUTIONS

## ROTARY HAMMERS



1" SDS-Plus Hammer  
KHE D-26



1 1/4" SDS-Plus Hammer  
KHA 36-18 LTX 32 (2x18V)



1 9/16" SDS-Max Hammer  
KH 5-40



1 9/16" SDS-Max Hammer  
KHEV 5-40 BL



1 3/4" SDS-Max Comb. Hammer  
KHEV 8-45 BL



2 1/16" SDS-Max Demolition /  
Chipping Hammer  
KHEV 11-52 BL

## EXTRACTORS

Dual suction chamber collects  
dust while allowing full suction  
to adhere to walls or ceilings.



630829000  
9/16" Dust extraction accessory  
Dustless drilling up to 9/16" dia.  
Model: DDE 14



631343000  
2-3/4" Dust extraction accessory  
Dustless drilling up to 2-3/4" dia.  
Model: DDE 72



623271000  
Dust extractor for drilling  
and chiseling  
Model: ESA Max

OBJECTIVE  
DATA



1" SDS-Plus Comb18V Hammer  
with integrated dust extraction  
KHA 18 LTX BL 24 + ISA 18 LTX  
1,200 RPM 4,500 BPM

Ask for  
objective  
data



9" Masonry Cutting Tool  
T 24-230 MVT CED  
6,600 RPM 15 Amps



Ask for objective data

7" Surface Prep Kit  
W 24-230 MVT with  
Dust Control Shroud  
6,600 RPM

# CONCRETE GRINDERS



**RFEV 19-125 RT**  
5" Variable Speed Concrete Scarifier



**RSEV 19-125 RT**  
5" Variable Speed Concrete Renovation Grinder



**RSEV 17-125 Set**  
5" Concrete Grinder Kit

Model w/Concrete Diamond Cup Wheel*	RFEV 19-125 RT	RSEV 19-125 RT US603825751	RSEV 17-125 Set 603829620 (KIT)
<b>Tool Only</b>	<b>603826760</b>	<b>603825750</b>	
Wheel diameter	5"	5"	5"
Motor	LongLife high torque		
Switch with lock-on capability	•	•	•
Electronics:	Vario-tacho-constamatic (VTC)	Vario-tacho-constamatic (VTC)	Vario-tacho-constamatic (VTC)
Power interruption protection	•	•	•
Electronic soft start	•	•	•
Electronic overload protection	•	•	•
Metabo safety slip clutch		•	•
Floating brush ring	•	•	
Aluminum die-cast "Turbo" dustless guard	•	•	
Near wall access	•	•	•
<b>Heavy Duty</b> aluminum die-cast flange	•	•	•
5 Position ergonomic, adjustable loop handle	•	•	
Anti-vibration side handle			•
No-load speed (RPM)	750-3,100 RPM	3,200-8,200	2,800-9,600
Amps	15.0	15.0	14.5
Rated input watts	1,900	1,900	1,550
Arbor size		7/8"	7/8"
Spindle thread	M14	5/8"-11	5/8"-11
Carrying case (standard)	344455160	344455160	344455290
<b>Standard equipment:</b>			
Vacuum adaptor	630796000	630796000	
5 Position adjustable loop handle	343399690	343399690	
MVT Vibratex side handle			314000970
Additional brush ring	628215000	628214000	626733000
Scarifier head pointed stars	628218000		
Inner flange		341031290	341031290
Locking nut		341101480	341101480
Offset spanner wrench	623910000	623910000	623910000
5" Concrete diamond cup wheel		628205000	628209000
Shroud			626732000
<b>Optional equipment:</b>	Scarifier head, offset stars (628219000)	Diamond cup whl for hard concrete (628205000)	
		Diamond cup whl for green concrete, abrasive materials (628206000)	
		PCD diamond cup wheel (628208000)	

## CONCRETE ACCESSORIES



**628206000**  
Diamond cup wheel for green concrete



**628208000**  
PCD wheel (protective concrete coatings) for epoxies and sealants



**628205000**  
Universal diamond cup wheel for concrete



**628209000**  
For hard materials



**628218000**  
Milling head, pointed complete  
**628219000**  
Milling head, offset complete



**628270000**  
10 Milling stars, pointed  
**628271000**  
10 Milling stars, offset

# CONCRETE GRINDER AND SURFACE PREP KITS

**MADE IN GERMANY**

**Excellent Ergonomics:**  
Adjustable D-Handle for perfect control

**Turbo Airflow Design:**  
Cools and cleans spindle bearing for extended life

**Convertible Feature:**  
Flush grinding to the wall

**Spring mounted brush ring**  
Excellent handling on rough surfaces, longer brush life

**Powerful 15A Long Life Motor:**  
Soft start, overload protection, restart protection

**VTC Full Wave Electronics:**

- Work at customized speeds to suit the application material
- Speeds remain almost constant, even under load



**Excellent Ergonomics:**  
Rat tail with lock-on switch for extended grinding and reduced fatigue

Tool free depth control



LEARN MORE!

**RFEV 19-125 RT**  
5" Variable Speed Scarifier



**5" Surface Prep Kit**  
WEV 15-125 HT with Dust Control Shroud



with ASR 35 ACP  
(Ask for objective data)

**7" Surface Prep Kit**  
W 24-230 MVT with Dust Control Shroud

Model Kit:	WEV 15-125 with Dust Control Shroud US600562800	W 24-230 MVT with Dust Control Shroud US606467800 USCA606467800
Motor	LongLife	LongLife
Switch w/ lock on capability	•	•
Side handle	Vibration dampened	Anti-vibration
Auto-stop carbon brushes	•	•
Winding protection grid	•	•
Electronics features:		
Speed stabilization	VTC	
Power interruption protection	•	
Soft start feature	•	
Overload protection w/ LED	•	
Maximum wheel diameter	4 1/2" - 5"	7"
No-load speed (RPM)	2,800-9,600	6,600
Amps	13.5	15
Rated input watts	1,550	2,400
<b>Standard equipment:</b>		
Side Handle	316046590	314000960
Type 27 wheel guard	339204500	339203260
Loop handle		US630342000
Handle bolt (2 req.)		141110390
Convertible shroud	655153000	655154000
Vacuum adaptor	630316000	630316000
Universal wheel mounting kit for non threaded wheels		US90357031

## T 13-125 Tuck Point Kit

Tuck Point Kit



Side of guard opens for tuck-pointing 90 degree corners

**LongLife Motor with Winding Protection Grid**  
For quicker material removal and longer service life

**S-Automatic Safety Clutch**  
Increased safety, predictable handling  
Clutch helps to protect operator from kick back

**Rear Air Intake**  
Maximizes flow of cooling air, for increased protection from overheating and overload

Great line of sight so you can see your motor joint

**Tuck Point Guard**  
Dust extraction guard for quick removal of mortar joints

**MVT Vibrattech Handle**  
Reduces vibration by up to 60% compared to other handles. The risk of "White Finger Syndrome" caused by vibration exposure over the workers' lifespan is reduced considerably!



**Model**  
**Kit: Tool, Shroud, 2 Diamond Wheels**

**T 13-125 Tuck Point Kit**  
**600431690**

**Tool Only:**

**600431420**

Maximum wheel diameter	5"
Motor	LongLife high torque
AC/DC capability	•
Switch with lock-on capability	•
Metabo safety slip clutch	•
Maximum Torque	30.1 inch lbs.
Low profile aluminum die-cast gear housing	•
Heavy duty die-cast flange	•
Rotatable gear housing	•
Auto-stop carbon brushes	•
Winding protection grid	•
No-load speed (RPM)	9,600
Amps	12.0
Rated input watts	1,350
Arbor size	7/8"
Spindle thread	5/8"-11
Dust Extraction port	2-1/4"
<b>Standard equipment:</b>	
2" to 2 1/4" Vacuum adaptor	316054000
Dustless tuck point guard	628216000
5" Turbo Sandwich Diamond Blade	624304000
Spanner wrench	623934000
MVT Vibrattech side handle	314000970
Inner flange	341031290
Locking nut	341101480
1-1/4" Hose adapter for ASR 35 ACP HEPA	630316000

See page 122-123 for vacuum and accessories

**T 13-125 CED Set**  
4 1/2"-5" Masonry Cutting/  
Scoring Tool  
with Guide Rollers



**T 24-230 MVT CED**  
9" Masonry Cutting Tool

**MFE 40**  
Wall Chaser



Model	T 13-125 CED Set 600431680	T 24-230 MVT CED 600435620
<b>Kit:</b> Tool, Shroud, 1 Diamond Wheel		
<b>Tool Only:</b>	<b>600431420</b>	
Maximum wheel diameter	5"	9"
Maximum cutting depth		
without base plate	1-1/16"	2-3/8"
with base plate	1"	
with guide rail	25/32"	
Base plate size	6-11/16" x 11-1/8"	
Motor	LongLife high torque	LongLife high torque
AC/DC capability	•	•
Switch with lock-on capability	•	•
Metabo slip clutch	•	
Winding protection grid	•	•
Maximum torque	30.1 inch lbs.	4.5 HP/150 in. lbs.
Low profile aluminum die-cast gear housing	•	•
Rotatable gear housing	•	
Auto-stop carbon brushes	•	•
Plunge function	•	
Removable base plate	•	
Toolless adjustable cutting depth	•	•
Steel base plate	•	•
Steel base plate w/ guide rollers	•	•
Ability to use with guide rail	•	
Aluminum die-cast flange	•	•
No-load speed (RPM)	9,600	6,600
Amps	12.0	15.0
Rated input watts	1,350	2,400
Arbor size	7/8"	7/8"
Spindle thread	5/8"-11	5/8"-11
Dust extraction port	35mm (1-3/8")	35mm (1-3/8")
<b>Standard equipment:</b>		
Shroud	626731000	US626752000
Concrete diamond cutting wheel	628112000 (5")	628116000 (9")
Spanner wrench	623934000	623910000
Inner flange	341031290	341031290
Locking nut with spacer	316060150	341212950
Side handle	314000970 (Anti-vibration)	314000280
Spacers		341032380

Model	MFE 40 604040620
<b>Wall Chaser:</b>	
Maximum wheel diameter	5"
Motor	LongLife high torque
Switch with lock-on capability	•
Power interruption protection	•
Electronic soft start	•
Electronic overload protection	•
Metabo slip clutch	•
Winding Protection Grid	•
Adjustable Handle	•
Maximum Torque	54 in lbs.
No-load speed (RPM)	5,000
Amps	15.0
Rated input watts	1,700
Arbor size	7/8"
Spindle thread	M14
Width of cut	3/8", 5/8", 7/8", 1-1/8"
Adjustable depth of cut	3/8" to 1-9/16"
Tool weight (including diamond wheel)	10.1 lbs.
Carrying case (standard)	344455860
<b>Standard equipment:</b>	
5" Concrete diamond cutting wheel (2)	628157000
Offset spanner wrench	623934000
Spacer set	341032380
Clamping nut	341212450
Inner flange	341212440
Chisel	344147650

**Guide Rails for T 13-125 CED**


FS 80 #629010000  
FS 160 #629011000



**Diamond Channeling Wheels for MFE 40**

Cuts 3/4" channel in one pass  
#628298000

Cuts 1-3/16" channel in one pass  
#628299000



# POLISHERS



Backing pad  
not included

**CORDED**  
**Variable Speed High Torque**  
**Dry Polisher**  
PE 15-20 RT



**CORDED**  
**Variable Speed High Torque**  
**Dry Polisher**  
PE 15-30



**PWE 11-100**  
**Variable Speed High**  
**Torque Wet Polisher**

Model	PE 15-20 RT 615200420	PE 15-30 615300420
Maximum pad diameter	7"	7"
Double insulated	•	•
Electronic features:		
Speed stabilization	Vario-tacho-constamatic (VTC)	
Power interruption protection	•	•
Overload protection	•	•
Soft start feature	•	•
Restart protection	•	•
Electronic winding temperature monitor with LED display	•	•
Winding protection grid	•	•
Planetary gearing	•	•
Variable speed controlled by adjusting dial	•	•
Auto-stop carbon brushes	•	•
No-load speed (RPM)	300-1,900 RPM	800-3,000 RPM
Amps	13	13
Rated input watts	1,500	1,550
Spindle thread	5/8"-11	5/8"-11
Carrying case		
<b>Standard equipment:</b>		
Side handle	314000540	
Loop handle		•
<b>Optional equipment:</b>		
5" soft backing pad	655141000	655141000
5" medium backing pad	655129000	655129000
5" hard backing pad	623298000	623298000
7" hard backing pad	655143000	655143000

Model	PWE 11-100 602050420
Vario tacho constamatic (VTC) electronics	•
Low profile aluminum die-cast gear housing	•
Housing cover to protect surfaces	•
Splash proof ventilation slots	•
Water supply through spindle	•
Motor	LongLife
Standard 1/2" quick connect	•
Ergonomic adjustable D-handle	•
Electronic winding temperature monitor with LED display	•
GFCI included for electrical safety	•
Auto-stop carbon brushes	•
Electronic soft start feature	•
Electronic speed stabilization	•
Maximum torque	34 inch lbs.
Backing pad size	4"-5"
No Load speed (RPM)	1,700-5,400
Amps	9.6
Rated input watts	1,100
Spindle thread	5/8"-11
<b>Standard equipment:</b>	Loop handle (343399690)
<b>Optional equipment:</b>	Tool Bag (657006000)



Backing pad not included on above tools



# 4 1/2" VARIABLE SPEED ANGLE GRINDERS



**WEV 11-125**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder



**WEV 15-125 HT**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder



**WEV 1500-125 RT**  
5" Variable Speed Angle  
Grinder



**WEV 15-125 Quick**  
Electronic Variable Speed  
4 1/2"/ 5" Angle Grinder



**WEV 15-150 HT**  
Electronic Variable Speed  
6" Angle Grinder

Model	WEV 11-125 603625420	WEV 15-125 Quick 600468420	WEV 15-125 HT 600562420	WEV 1500-125 RT 601243420	WEV 15-150 HT 600563420
Maximum wheel diameter	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"	4 1/2" - 5"	6"
Amps	11.0	13.5	13.5	13.2	13.5
Rated input watts	1,000	1,550	1,550	1,500	1,550
No-load speed (RPM)	2,800-10,500	2,800-11,000	2,800-9,600	3,500-11,000	2,000-7,600
Switch Type	Lock-on slide	Lock-on slide	Lock-on slide	Locking trigger	Lock-on slide
Motor	LongLife	LongLife	LongLife	<b>Heavy Duty</b>	LongLife
Metabo safety slip clutch	•	•	•	•	•
Quick wheel change system		•			
Electronics features:					
Speed stabilization	VC	VTC	VTC	VTC	VTC
Power interruption protection	•	•	•	•	•
Soft start feature	•	•	•	•	•
Overload protection w/ LED	•	•	•	•	•
Rotatable gear housing	•	•	•		•
Burst-proof guard w/ 7 stops	•	•	•	•	•
Vibration dampened side handle	•		•		•
Side handle		Anti-vibration		Ergonomic	
Auto-stop carbon brushes	•	•	•	•	•
Winding protection grid	•	•	•		•
<b>Standard equipment:</b>					
Type 27 wheel guard	339204500	339204500	339204500	339203490	339204510
Side handle	316046590	314000970	316046590	316046590	316046590
Inner flange	341031290	341031290	341031290	341031290	341031290
Locking nut	341101480	316055450	341101480	341101480	341101480
Spanner wrench	623934000		623934000	623934000	623934000
<b>Optional equipment:</b>					
Type 1 cutting guard (steel)	US339203040	US339203040	US339203040		US339203050
Quick-clip on type 1 cutting guard	630352000	630352000	630352000	630352000	630353000
Dust filter		630709000	630709000		630709000

**WILL NEVER LOSE SUCTION WHILE CLEANING!**

**RATED #1**



**630174000**  
Rolling base trolley with locking casters for AS 18 PC HEPA cordless vacuum



**Auto Clean Wet/Dry Vacuum**

ASR 35 ACP  
#602057800 HEPA

**9** GALLON CAPACITY    **1400** WATTS / **11** AMPS    **157** CFM AIRFLOW

**Cordless Dry 74 CFM HEPA Vacuum**

AS 18 PC HEPA  
#602021860 (BARE)

**2** GALLON CAPACITY    **120** CFM AIRFLOW

**Model**  
**Auto Clean HEPA Vacuum:**

**ASR 35 ACP**  
**602057800**

Automatic electromagnetic vibration filter cleaning	•
Stable design	•
Extra large rear wheels	•
Integrated power outlet with autostart	•
Power control	•
7 sec. run on prevents hose clogs	•
Airflow, CFM	157
Max. vacuum pressure mBar	248
Filter surface inches <sup>2</sup> total	1333
Rated input watts/amps	1400/11
Container capacity	9 gallons
Tool weight	33.1 lbs.
<b>Standard:</b>	
Suction hose 1-1/2" x 11.5 ft	631362000
PE collection bag	630325000
HEPA Filter Set (washable)	630326000
<b>Optional:</b>	
Transport handle	630311000
Vacuum wand	630317000
Crevice tool	630323000
Floor tool	630321000 or 630329900
PVC Filter Set (washable)	631934000
Adaptor for hose to 2-1/4" inlet	630316000
Paper dust bag 5pk	631935000
Fleece pre-filter bag 5pk	630343000



**Model**  
**Bare Tool:**

**AS 18 PC HEPA**  
**602021860**

Press clean: manual filter cleaning uses powerful air stream	•
Dual power setting: Eco-mode for extended run time. Boost for powerful suction	•
Non-slip rubber base	•
Metaloc box, designed for stacking	•
Capacity display	•
Run time (with 8.0 Ah)	20 min / 40 min (ECO)
Airflow, CFM	74
Max. vacuum pressure mBar	120
Container capacity (dry pick-up)	2 gallons
<b>Standard:</b>	
Fleece bag	630173000
Suction Hose	630171000
Additional brush ring	628215000
Floor nozzle	630320000
Crevice tool	630323000
<b>Optional:</b>	
5 Fleece Filter Bags	630173000
Portable base w/locking casters	630174000
HEPA Filter	630175000

SHROUDS

Dustless Convertible Shroud for concrete surface prep

**655154000**

7": For all current large professional angle grinders

**655153000**

5": For all current small professional angle grinders



**626732000**  
GED Grinding Shroud



**630401000**  
5" Clip-on Dustless Cutting Shroud



**626731000**  
CED 125 Plus Anti-Static Shroud with rolling guides



**628216000**  
Dustless Tuckpoint Guard. Fits all professional angle grinders



**US626752000**  
CED 230  
9" Dustless concrete cutting shroud fits Metabo 9" large grinders. **Professional series only**

BAGS AND FILTERS



**631934000**  
Standard Polyester Filter Set (2)

**630326000**  
HEPA filter set (2)



**630175000**  
HEPA Filter for AS 18 PC HEPA cordless vacuum



**630173000**  
Fleece Bag for Cordless HEPA vacuum, AS 18 PC HEPA



**630343000**  
Fleece Pre-filter Bags (5)



**630325000**  
PE Collection Bag (5)



**631935000**  
Paper Filter Bags (5)

DUST CONTROL ACCESSORIES



**630829000** 9/16" Dust extraction accessory  
Dustless drilling up to 9/16" dia. (model DDE 14)



**631343000** 2-3/4" Dust extraction accessory  
Dustless drilling up to 2-3/4" dia. (model DDE 72)



**623271000**  
Dust extractor for drilling and chiseling (model ESA Max)

HOSES



**631362000**  
1-1/2" x 11.5' Standard Hose included with ASR 35 ACP. Durable, crush proof, high quality



**631370000**  
1-1/2" x 13' Anti-static Suction Hose. Durable, crush proof, high quality



**630171000**  
1-1/8" x 10' Hose for AS 18 PC HEPA cordless vacuum



**630312000**  
2'-1/4" x 10' Hose for Large Machine applications, fits with 655154000, 655155000 Shrouds



**631751000**  
6' x 1 1/2" diameter and 2 1/4" vacuum connection for use with Sander

ADAPTORS



**630798000**  
Standard swivel rubber adaptor 35mm



**630796000**  
Hose adaptor for RSEV 19-125 RT, RFEV 19-125 RT, W 12-125 HD CED Plus, WE 15-125 HD GED



**630316000**  
Extraction Adaptor 35/58mm

ATTACHMENTS



**630317000**  
Wand



**630321000**  
Nozzle Set (3 piece)



**630245000**  
Upholstery Brush



**630314000**  
Plastic Suction Pipes 35mm



**630329000**  
Plastic Floor Nozzle



**630244000**  
Universal Brush



**630320000**  
Suction Nozzle 35mm X 120mm wide



**631363000**  
Metal Suction Pipes 35mm



**631940000**  
Metal Nozzle



**630324000**  
Rubber Nozzle



**630323000**  
Crevice (Grout) tool

# SDS-PLUS COMBINATION HAMMERS

## 1" SDS-Plus Combination Hammer

KHE D-26  
#601109420



## 1" 18V SDS-Plus Combination Hammer with Integrated Dust Collection

KHA 18 LTX BL 24 Quick + ISA 18 LTX  
#600211950 (w/Dust Extraction) 5.2 Ah Kit  
#600211900 (w/Dust Extraction) No batts.  
#600211850 Tool Only



Ask for objective data



**KHA 18 LTX BL 24 + ISA 18 LTX**  
1" 18V SDS-Plus Combination Hammer  
with Integrated Dust Collection



**KHE D-26**  
1" SDS-Plus Combination  
Hammer



**KHE 3250**  
1 1/4" SDS-Plus  
Combination Hammer w/Rotostop



**KHA 36 LTX**  
1 1/4" 36V SDS-Plus  
Combination Hammer

Model	KHA 18 LTX BL 24 + ISA 18 LTX (18V) 600211950 (+ Dust Extraction) 5.2 Ah Kit	KHE D-26 601109420	KHE 3250 600637420	KHA 36 LTX (36V) 600795520 5.2 Ah Kit 600795840 Tool Only
	<b>KHA 18 LTX BL 24 + ISA 18 LTX (18V) (+ Dust Extraction) 600211900</b> No batts.			<b>KHA 36-18 LTX 32 (2x 18V) 600796840</b> Tool Only
	<b>600211850</b> Hammer Only			
Single blow energy (EPTA)	2.2 J	2.3 J	3.1 J	3.1 J
Electronics	Vario-speed	Vario-speed	Vario-speed	Vario-speed
Motor	Brushless 18V	<b>Heavy Duty</b>	Long Life	Cordless 36V
Max tightening torque (inch lbs.)	133			142
Quick Chuck system	•			•
Rotation stop for chiseling operations	•	•	•	•
Percussion stop for drilling only	•	•	•	•
Aluminum die-cast gear housing	•	•	•	•
Reversing switch	•	•	•	•
Metabo safety slip clutch	•	•	•	•
Rubber coated handle	•	•	•	•
Auto-stop carbon brushes	•	•	•	
Winding protection grid	•	•	•	•
Capacity				
-in concrete using solid bits	1"	1"	1-1/4"	1-1/4"
-in brickwork using thin wall core bits	2-1/2"	2-5/8"	3-1/4"	2-3/4"
No-load speed (RPM)	1,200	960	1,150	1,100
No-load blows per minute (BPM)	4,500	5,400	4,470	4,500
Amps		7.0	7.2	
Rated input watts		800 W	800 W	
<b>Standard equipment:</b>				
Side handle	314001140	631052000	314001380	314001380
Depth gauge		341511630	341511630	341511630
Quick SDS-Plus chuck				316047350
Quick 3-jaw chuck				316047500
<b>Optional equipment:</b>				
Dust extraction adaptor		630829000	630829000	630829000

## 2-1/16" SDS-Max Combination Hammer

KHEV 11-52 BL

#600767620



### S-Automatic Safety Clutch:

- Increased safety, predictable handling
- Helps to protect operator from kick back



### Internal Counterweight:

Absorbs shock energy for significantly less vibration



### 2 Modes:

Rotary Hammer  
Chipping Hammer



### MVT Vibratech Handle:

Reduces vibration by up to 60% compared to other handles



### Most Powerful BL Motor:

- Longest life
- Lowest maintenance



### VTC Full Wave Electronics:

- Work at customized speeds to suit the application material
- Speeds remain almost constant, even under load



Dust extractor for drilling and chiseling  
ESA Max #623271000

# SDS-MAX COMBINATION HAMMERS



**KH 5-40**  
1 9/16" SDS-Max  
Combination Hammer




**KHEV 8-45 BL**  
1 3/4" SDS-Max  
Combination Hammer



**KHEV 5-40 BL**  
1 9/16" SDS-Max  
Combination Hammer



**KHEV 11-52 BL**  
2 1/16" SDS-Max  
Combination Hammer

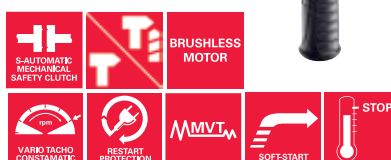

Model	KH 5-40 600763620	KHEV 5-40 BL 600765620	KHEV 8-45 BL 600766620	KHEV 11-52 BL 600767620
Max. Single blow energy (EPTA)	7.1 J	8.7 J	12.2 J	18.8 J
No-load Speed (RPM)	500	350 / 500	212 / 300	190 / 270
No-load Impacts (BPM)	2,800	2,900	2,900	2,360
Amps	10.0	11.3	14.8	14.8
Rated Input Watt	1,100	1,100	1,500	1,500
Motor	Brushed	Brushless	Brushless	Brushless
Gear Box	Aluminum	Aluminum	Aluminum	Aluminum
Chipping Lock-on		•	•	•
Electronics		VTC	VTC	VTC
Safety Slip Clutch		•	•	•
Variable Speed		2-speed (100%-70%)	2-speed (100%-70%)	2-speed (100%-70%)
Capacity in concrete:				
-Solid Bits	1-9/16"	1-9/16"	1-3/4"	2-1/16"
-Core Bits	4-1/8"	4-1/8"	5"	6-5/16"
Length (inch)	17.6	19.2	21.1	23
Tool Weight (lbs)	15.7	18.3	22.3	27.3
Featured accessory:	ESA Max (623271000)			

# CHIPPING HAMMERS



**MHEV 5 BL**  
Chipping Hammer



**MHEV 11 BL**  
Chipping Hammer



Model	MHEV 5 BL 600769620	MHEV 11 BL 600770620
Max. Single blow energy (EPTA)	8.7 J	18 J
No-load Impacts (BPM)	2,900	2,100
Amps	11.3	14.8
Rated Input Watt	1,150	1,500
Motor	Brushless	Brushless
Gear Box	Aluminum	Aluminum
Chipping Lock-on	•	•
Electronics	VTC	VTC
Variable Speed	2-speed	2-speed
Length (inch)	19	23
Tool Weight (lbs)	17.4	27

**Dust extractor for drilling and chiseling**  
ESA Max #623271000

**9/16" Dust Extraction Accessory**  
DDE 14 #630829000

Dust extraction accessory  
Dustless drilling up to 9/16" dia.

**2-3/4" Dust Extraction Accessory**  
DDE 72 #631343000

Dustless drilling up to 2-3/4" dia.

Dual suction chamber collects dust while allowing full suction to adhere to walls or ceilings.






**SBE 850-2**  
1/2" Hammer Drill



**SBE 650**  
1/2" Hammer Drill



**SBEV 1000-2**  
1/2" Hammer Drill



Model	SBE 650 600671420	SBE 850-2 600782620	SBEV 1000-2 600783620
Electronics	Variospeed (V)	Variospeed (V)	Vario-tacho-constamatic (VTC)
Motor	<b>Heavy Duty</b>	LongLife	LongLife
Aluminum die-cast gear housing		•	•
Safety non-slip side handle	•	•	•
Gear-box	1-speed	2-speed	2-speed
Electronic soft start feature		•	•
Power interruption protection			•
Maintenance reminder light			•
Swivel cord connection		•	•
Reversing switch	•	•	•
Chuck	1/2" Geared	1/2" Geared	1/2" Geared
Metabo safety slip clutch		•	•
Auto-stop carbon brushes		•	•
Winding protection grid		•	•
Maximum tightening torque	80 in. lbs.	319 in. lbs	354 in. lbs.
Rubber coated handle	•	•	•
Capacity			
- in concrete	5/8"	3/4"	7/8"
- in mild steel	1/2"	1/2"	5/8"
- in softwood	1-1/4"	1-1/2"	1-3/4"
No-load speed (RPM)	0-2,800	0-1,100 / 0-3,100	0-1,000 / 0-2,800
No-load blows per minute (BPM)	44,800	58,900	53,200
Amps	6.0	7.7	9.0
Rated input watts	650	850	1,000
Chuck capacity	1/2"	1/2"	1/2"
Spindle thread	1/2 x 20 UNF	1/2 x 20 UNF	1/2 x 20 UNF
Standard Equipment:	1/2" chuck (635250000) Side handle (631052000) Depth gauge (341511630) Chuck key (635167000)	1/2" chuck (635250000) Side handle (314001030) Depth gauge (341511630) Chuck key (635167000)	1/2" chuck (635250000) Side handle (314001030) Depth gauge (341511630) Chuck key (635167000)
Optional Equipment:	Dust extraction kit (630829000)	Dust extraction kit (630829000)	Dust extraction kit (630829000)

# SDS-Max and SDS-Plus Carbide Bits

2-CUTTER

## PRO 4: FAST & EFFICIENT

**SUPER DUTY**

SDS-Plus bit diameters 5/32" - 5/8"

### Flute Design

- Patented design
- Multi-fluted spiral shaft
- Quickly removes concrete dust
- Longer bit life
- Increased impact power and speed due to reinforced core
- Reduces vibration



### Carbide Head

- Solid carbide tip
- Chisel shaped geometry with centering tip
- Improved speed
- Precise spot drilling on hard and soft surfaces
- Reduces wear on flutes
- Reinforced chamfers

### Application:

Concrete	☆☆☆
Reinforced Concrete	☆
Natural Stone	☆☆
Solid Brick	☆☆☆
Limestone	☆☆



## CLASSIC: FAST & COST EFFECTIVE

**HEAVY DUTY**

SDS-Plus bit dia. 11/16" - 1"  
SDS-Max bit dia. 1/2" - 9/16"

### Flute Design

- Large spiral flutes
- Accurate drilling
- Flexible center core



### Carbide Head (SDS Max)

- Chisel shaped drill bit head
- Short head to flute entrance
- 130 degree strong carbide tip improves centering

### Application:

Concrete	☆☆☆
Natural Stone	☆☆
Solid Brick	☆☆☆
Limestone	☆☆



## ULTRA-X: LONG LIFE & DURABILITY

**EXTREME DUTY**

SDS-Plus bit diameters 3/16" - 9/16"

### Flute Design

- Dissipates vibration and concentrates impact on carbide cutter
- Multi-fluted spiral shaft
- Low vibration
- Large volume flute
- High quality alloy steel



### Carbide Head: (SDS Plus)

- Solid carbide 4 cutter head
- Centering point power breaker
- Up to 50% more carbide tip for precise drilling and hole guides
- Precision 4 x 90° ensures perfect round holes
- Secondary cutters improve speed and support
- Chamfered carbide tipped profile stops bits from seizing up when hitting rebar

### Application:

Concrete	☆☆☆
Reinforced Concrete	☆☆
Natural Stone	☆☆☆
Solid Brick	☆☆
Limestone	☆☆



## PRO 4: LONG LIFE, DURABILITY, BEST REBAR PERFORMANCE

**SUPER DUTY**

SDS-Plus bit dia. 5/8" - 1 1/4"  
SDS-Max bit dia. 5/8"-2"

### Flute Design

- Dissipates vibration and concentrates impact on carbide cutter
- Patented design
- Multi-fluted spiral shaft and large volume flute
- Lowest vibration
- High quality alloy steel




### Carbide Head (SDS Max)

- Solid carbide tip
- Centering point
- Up to 50% more carbide tip for precise drilling and hole guides
- Precision 4 x 90° ensures perfect round holes
- Secondary cutters improve speed and support
- Chamfered carbide tipped profile stops bits from seizing up when hitting rebar

### Application:

Concrete	☆☆☆
Reinforced Concrete	☆☆☆
Natural Stone	☆☆☆
Solid Brick	☆☆



4-CUTTER

# SDS-PLUS AND SDS-MAX SHANK DRILL BITS

SDS plus	Drilling Dia. (inches)	Drilling Depth (inches)	Total Length (inches)	2-Cutter	Bulk	Qty for Bulk	4-Cutter
	5/32	2	4	674505000	676276000	25	
	5/32	4	6	674605000	674652000	25	
	3/16	2	4		676277000	25	674840000
	3/16	4	6	674606000	674656000	25	674841000
	3/16	6	8	676127000	676278000	25	674842000
	3/16	8	10	676147000			674843000
	3/16	10	12				674844000
	3/16	12	14	676148000	676148100	25	
	3/16	14	16	676507000			
	7/32	2-1/4	4-1/4	674507000			
	7/32	4-1/4	6-1/4	676132000	676279000	25	
	7/32	6-1/4	8-1/4	676129000	676129100	25	
	7/32	9	11	676130000	676130100		
	7/32	12	14	676149000			
	7/32	14	16	676131000			
	1/4	2	4	674508000	674558000	25	674845000
	1/4	4	6	674708000	674758000	25	674846000
	1/4	6	8		676281000	25	674847000
	1/4	9	11		674908100	25	
	1/4	10	12				674849000
	1/4	12	14	676150000			
	1/4	14	16	676151000			
	1/4	18	20	674909000			
	5/16	4	6	674510000	676282000	25	674850000
	5/16	6	8	674710000			
	5/16	10	12	674810000			674851000
	3/8	4	6	674512000	674562000	20	674853000
	3/8	6-1/4	8-1/4	676125000	676283000	25	
	3/8	8	10	674712000			
	3/8	10-1/4	12-1/4	676123000			674854000
	3/8	16	18	674713000			674855000
	3/8	22	24	674714000			
	7/16	4	6	674514000			674856000
	7/16	8-1/4	10-1/4	676153000			
	7/16	10-1/4	12-1/4	676133000			674857000
	7/16	16	18	676154000			674858000
	1/2	4	6		674566000	25	674859000
	1/2	8	10				
	1/2	10-1/4	12-1/4	688062000			674860000
	1/2	16	18				674861000
	1/2	22	24	674818000			
	9/16	4-1/4	6-1/4	674819000			674862000
	9/16	8-1/4	10-1/4	676155000			
	9/16	10-1/4	12-1/4	676156000			674863000
	9/16	16	18	676157000			674864000
	5/8	4-1/4	6-1/4	676158000			
	5/8	6	8	674520000	676286000	10	688074000
	5/8	8	10				676173000
	5/8	10	12	674620000			676174000
	5/8	16	18	674720000			676177000
	5/8	22	24	676159000			
	11/16	6	8	676166000			
	11/16	10	12	676167000			
	3/4	6	8		676288000	15	
	3/4	8	10	676126000			676181000
	3/4	10	12				676183000
	3/4	16	18	674724000			676185000
	3/4	22	24	676168000			
	7/8	6	8	676169000			676191000
	7/8	8	10	674528000			676192000
	7/8	10-1/4	12-1/4	676170000			676193000
	7/8	16	18	674728000			676196000
	1	6	8	676171000			
	1	8	10				676199000
	1	10	12	676172000			676201000
	1	16	18	674800000			676205000
	1-1/8	8	10				674804000
	1-1/8	16	18				688065000
	1-1/4	16	18				688066000

Red number indicates SPECIAL ORDER ITEM

SDS max	Diameter (inches)	Drilling Depth (inches)	Total Length (inches)	Order No.
2 Cutter CLASSIC	1/2	8	13	
	1/2	12	17	
	1/2	16	21	
	9/16	8	13	676258000
	9/16	16	21	676134000
	5/8	12	17	676620000
	5/8	8	13	676520000
	5/8	16	21	676720000
	5/8	31	36	676259000
	11/16	16	21	676260000
4 Cutter PRO 4	3/4	8	13	
	3/4	12	17	
	3/4	16	21	676724000
	3/4	31	36	676261000
	13/16	16	21	676262000
	27/32	8	13	676263000
	27/32	16	21	676264000
	7/8	8	13	
	7/8	12	17	
	7/8	16	21	
	7/8	31	36	676265000
	1	8	13	676700000
	1	12	17	676800000
	1	16	21	676900000
	1	31	36	676266000
	1-1/16	18	23	676267000
	1-1/8	12	17	
	1-1/8	16	21	676904000
	1-1/8	31	36	676268000
	1-1/4	10	15	676270000
1-1/4	18	23	676908000	
1-1/4	31	36	676271000	
1-3/8	12	17	676709000	
1-3/8	18	23	676912000	
1-3/8	31	36	676272000	
1-7/16	18	23	676273000	
1-1/2	12	17	676274000	
1-1/2	18	23	676916000	
1-9/16	18	23	676275000	
1-3/4	18	23	676924000	
2	18	23	676135000	

**SDS-PLUS BIT KIT**

**SDS-Plus 5 pc Assortment Kit #USBITKIT**

Includes:  
 3/16" x 4"  
 1/4" x 4"  
 1/4" x 6"  
 5/16" x 6"  
 3/8" x 6"



**SDS-MAX CHISEL SET**

**2 piece Chisel Set #623309000**



**Tapcon**

Drilling Dia. (inches)	Drilling Depth (inches)	Total Length (inches)	2-Cutter
5/32	2-3/8	5	688067000
5/32	3-1/8	6	688068000
5/32	4-1/8	7	688069000
3/16	2-1/8	5	688070000
3/16	3-1/8	6	688071000
3/16	4-1/8	7	688072000
Assortment Tapcon bit kit			688073000

**MADE IN GERMANY**

# SPLINE AND STRAIGHT SHANK DRILL BITS

**Spline Shank - Fits all Spline Drive Rotary Hammers**

**2-Cutter Design 3/8"-2"**

**4-Cutter Design 5/8"-1 1/2"**

**ADVANTAGES**



- Unique head design reduces friction in the hole resulting in faster drilling speed and maximum bit life
- Large volume double spiral flutes provide rapid dust removal further enhancing bit life and drilling speed
- Drills precise round holes for ease of anchor installation and stronger anchor holding
- Patented flute design minimizes vibration and noise thus protecting both tool and operator

	Drilling Dia. (inches)	Drilling Depth (inches)	Total Length (inches)	2-Cutter	4-Cutter
<b>SPLINE SHANK</b>	3/8	5	10	676122000	
	3/8	8	13	676222000	
	3/8	11	16	676223000	
	7/16	8	13	676224000	
	1/2	5	10	676016000	
	1/2	11	16	676116000	
	1/2	17	22	676118000	
	1/2	24	29	676225000	
	1/2	31	36	676226000	
	9/16	5	10	676227000	
	9/16	8	13	626228000	
	9/16	11	16	676229000	
	9/16	18	23	676230000	
	9/16	24	29	626231000	
	5/8	5	10		676020000
	5/8	8	13	626232000	
	5/8	11	16		676120000
	5/8	16	22	676121000	
	5/8	17	22		676119000
	5/8	24	29	676234000	676247000
	5/8	31	36	676233000	676248000
	11/16	11	16	676235000	
	3/4	5	10	676236000	676249000
	3/4	8	13	676237000	
	3/4	11	16	676251000	676124000
	3/4	17	22	676252000	676324000
	3/4	24	29	676239000	676115000
	3/4	31	36	676238000	676250000
	7/8	8	13	676240000	
	7/8	11	16		676128000
	7/8	17	22		676328000
	7/8	31	36	676241000	
	1	8	13	676242000	
	1	11	16	676031000	676200000
	1	17	22	676033000	676400000
	1	24	29	676244000	676254000
	1	31	36	676243000	676253000
	1-1/8	11	16	676037000	676204000
	1-1/8	17	22	676039000	676404000
	1-1/4	11	16	676041000	
1-1/4	17	22	676043000	676408000	
1-1/4	24	29		676255000	
1-1/4	31	36		676257000	
1-3/8	17	22	676047000	676412000	
1-1/2	11	16	676245000		
1-1/2	17	22		676416000	
1-3/4	17	22	676246000		
2	17	22	676136000		

Red number indicates SPECIAL ORDER ITEM

**Straight Shank - Fits Metabo Hammer Drills SBE561, SBE710, SBE751, SBE1100 and all Hammer Drills with 3-Jaw Chucks**

**>Pro VX2< Design**  
Bit diameters 1/8"-1"

**ADVANTAGES**




- Special carbide tip has low wear, high life expectancy, and improved resistance to damage when hitting rebar
- Aggressive carbide cutting edge provides rapid penetration and makes drilling possible even through hard aggregate
- Centering point on tip reduces bit "walking"
- 30% more holes per charge when used with cordless impact drills
- Premium alloy steel construction maximizes life expectancy

Note: Other sizes available on a special order basis

	Diameter	Drilling Depth	Overall Length	Order No.
<b>STRAIGHT SHANK</b>	1/8	1-3/8	3	674004000*
	5/32	4	6	676290000
	3/16	1-5/8	3-1/2	674006000
	3/16	4	6	674206000
	7/32	4	6	676291000
	1/4	2	4	674008000
	1/4	4	6	674108000
	1/4	10	12	676138000
	1/4	22	24	676139000
	9/32	2	4	676140000
	5/16	2-3/4	4-3/4	674010000
	5/16	4	6	674210000
	5/16	10	12	674410000
	3/8	4	6	674012000
	3/8	10	12	674412000
	3/8	18	20	674213000
	3/8	22	24	676141000
	7/16	4	6	674014000
	1/2	4	6	674016000
	1/2	10	12	674416000
	1/2	18	20	674216000
	1/2	22	24	676142000
	9/16	4	6	676143000
	5/8	4	6	674020000
	5/8	10	12	674420000
	5/8	22	24	676144000
	3/4	4	6	674024000
	3/4	10	12	674424000
	7/8	4	6	674028000
	7/8	10	12	676145000
1	4	6	674100000	
1	10	12	674300000	
1	22	24	676146000	

\*without centering point on tip

**MADE IN GERMANY**

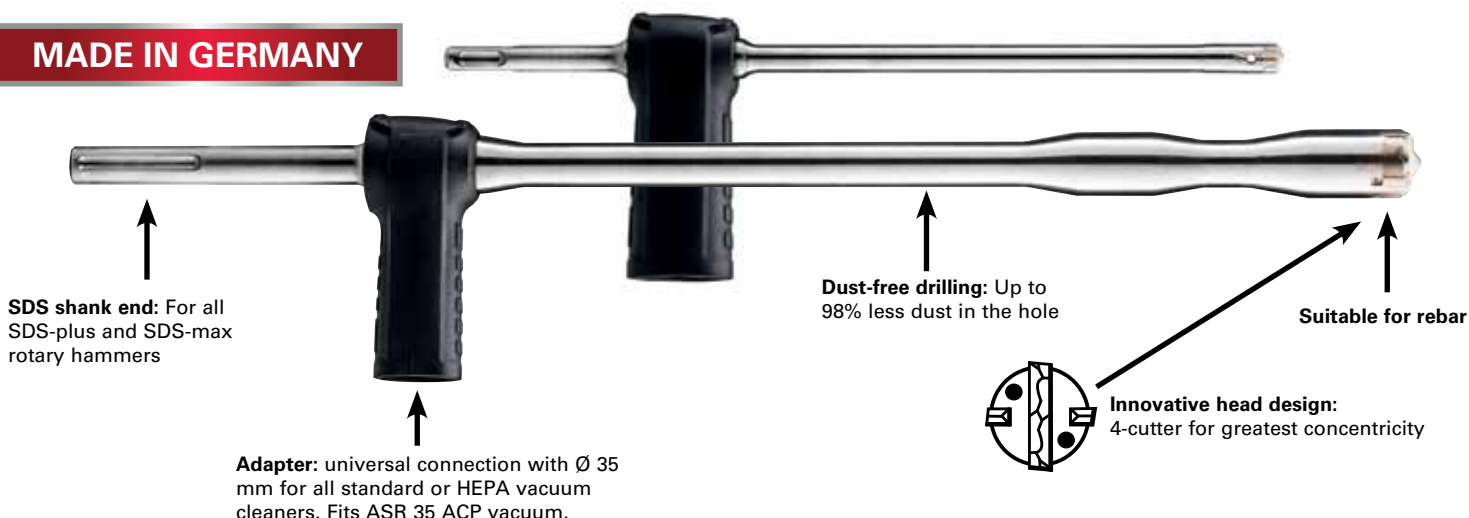


**SDS shank end:** For all SDS-plus and SDS-max rotary hammers

**Dust-free drilling:** Up to 98% less dust in the hole

**Suitable for rebar**

**Adapter:** universal connection with Ø 35 mm for all standard or HEPA vacuum cleaners. Fits ASR 35 ACP vacuum.




Type	Ø	Overall Length	Working Length	Part #
SDS-PLUS	7/16"	13"	7 7/8"	676301000
	1/2"	13"	7 7/8"	676302000
	9/16"	14"	9 1/2"	676303000
	5/8"	14"	9 1/2"	676304000
	3/4"	14"	9 1/2"	676305000
SDS-MAX	5/8"	23"	15 3/4"	676311000
	3/4"	23"	15 3/4"	676312000
	7/8"	23"	15 3/4"	676313000
	1"	25 1/4"	17 1/2"	676314000
	1 1/8"	35"	27 1/2"	676315000
	1 3/8"	35"	27 1/2"	676316000

## Dust Extraction Bits For SDS-Plus and SDS-Max

### ADVANTAGES


- Reduce steps in process for chemical anchoring
- Reduce dust exposure
- Excellent drilling speed because of optimal dust removal
- Reliable service life
- Reinforced cutter head structural design
- Competitive Y-cutter design is weak due to center hole

## EXTRACTION AND CHUCK ADAPTORS




**631343000 Dust extraction accessory**  
Dustless drilling up to 2 3/4" dia. Dual suction chamber collects dust while allowing full suction to adhere to walls or ceilings.

**Model DDE72**




**623271000 Dust extractor for drilling and chiseling**


**Model ESA Max**




**630829000 Dust extraction accessory**  
Dustless drilling up to 9/16" dia. Dual suction chamber collects dust while allowing full suction to adhere to walls or ceilings.




**630276000 Spline to SDS-Plus adaptor**



**630316000 Adaptor**  
Used for connecting 631592000 vacuum hose to standard 2 1/4" vacuum inlets.




**676137000 Spline to SDS-Max adaptor**




**631285000 SDS chuck adaptor**  
Suitable for drilling applications only. For use with most 1/2 x 20 thread chucks on all Metabo SDS rotary hammers (includes clamping bushing for 1/4" hex accessories).

(For Drilling Only)




**623371000 SDS-Max to SDS Plus adaptor**



**630928000 SDS chuck adaptor**  
1/2 x 20 threads. Use it to mount specialty chucks and accessories on Metabo SDS rotary hammers.

(For Hammering)



**676293000 SDS-Max to Spline adaptor**

## Core Bits

### Core Bits




- Patented design with body clearance drills faster
- Tooth geometry provides better centering, improved resistance to rebar and longer bit life

**Note: Core bit attaches to bit holder or bit holder extension with either the 675701000 centering bit or 675703000 threaded bolt.**

Diameter	Length	Order No.
1 1/2"	4"	675716000
2"	4"	675720000
2 5/8"	4"	675726000
3 1/8"	4"	675730000
3 1/2"	4"	675736000
4"	4"	675740000
5"	4"	675750000

Individually packaged in plastic twist-off tubes.

### Threaded Bolt and Centering Bit



	Description	Order No.
A	6" x 1/2" CENTERING BIT	675701000
B	THREADED BOLT	675703000

- For core bits.



	Description	Overall Length	Order No.
A	SDS-MAX*	7"	675915000
B	SPLINE	7"	675910000

Individually packaged in plastic twist-off tubes.  
\*Registered trade mark of Robert Bosch Inc.

### One piece construction Core Bits - SIMPLIFIED USE

Diameter	Overall Length	Drilling Depth	SDS-Max Shank	Spline Shank
1-1/2	12	6-1/4	675800000	
1-1/2	22	16-3/4	675801000	675821000
1-3/4	22	16-3/4	675803000	675823000
2	12	6-1/4	675804000	
2	22	16-3/4	675805000	675825000
2-5/8	22	16-3/4	675807000	675827000
3-1/8	12	6-1/4	675808000	
3-1/8	22	16-3/4	675809000	675829000
3-1/2	12	6-1/4	675810000	
3-1/2	22	16-3/4	675811000	675831000
4	12	6-1/4	675812000	
4	22	16-3/4	675813000	675833000
5	12	6-1/4	675814000	
5	22	16-3/4	675815000	675835000
6	22	16-3/4	675816000	675836000



Replacement Pilot Drill\*  
675891000

Replacement Drift Key, Round\*  
675892000

\*included with one piece core bits

### Bit Holder Extension




- Bit holder extension for deep hole drilling, multiple extensions possible

Description	Order No.
EXTENSION 1" X 11"	675702000

Individually packaged in plastic tubes.

### SDS-MAX Drill Bit adaptor/extension system



- Inexpensive system will extend drilling depth up to 43" (even longer by attaching additional connectors and extensions)
- Simple to use/no energy loss
- 1 3/16" Minimum hole diameter for through drilling
- Universal adaptors available for SDS-Max, Spline, SDS-Plus

Description	Order No.
CONNECTOR SDS-Max TO SDS-Plus	623371000
CONNECTOR SDS-Max TO SDS-Max	675704000
CONNECTOR Spline TO SDS-Max	676137000
EXTENSION SDS-Max 43"	675705000
EXTENSION SDS-Max 30"	675706000
EXTENSION SDS-Max 12.5"	675707000

Additional lengths available upon special request

## Chisels

### SDS Plus Shank Chisels


- Precisely sharpened, they will retain their cutting edge over a long time
- Made of specially tough breakage resistant steel
- Easy to reforge

Order No.		Description	Width (inches)	Total Length (inches)	Pcs/Pk
631420420	A	COLD CHISEL	3/4	10	1
631425420	B	SCALING CHISEL	1 1/2	10	1
631421420	C	BULL POINT	---	10	1
631422420	D	GROOVING CHISEL	15/16	9 1/2	1
630992000	E*	POINTED	---	10	1




\*Use with SDS-Plus Hammers without rotation stop

### SDS-Max Shank Chisels

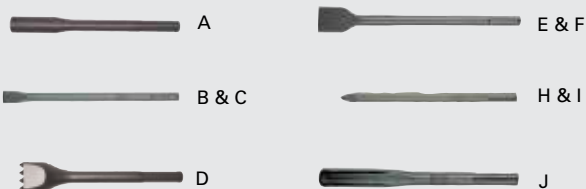

Order No.		Description	Width (inches)	Total Length (inches)	Pcs/Pk
655054000	A	GROUND ROD DRIVER	7/8	10 1/4	1
623353420	B	COLD CHISEL	1	12	1
623354420	C	COLD CHISEL	1	18	1
655079000	D	BUSHING TOOL	1 3/4	9 1/2	1
623355420	E	SCALING CHISEL	2	12	1
623384420	F	ASPHALT CHISEL	3 1/2	16	1
623356420	G	SCALING CHISEL	3	12	1
623351420	H	BULL PT CHISEL	---	12	1
623352420	I	BULL PT CHISEL	---	18	1
623357420	J	GROOVING CHISEL	1	12	1

### Spline Shank Chisels

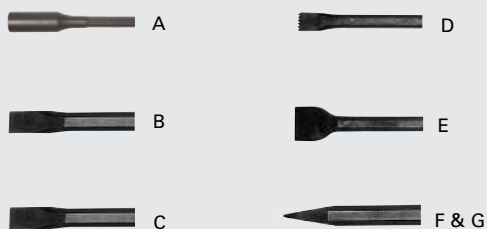

Order No.		Description	Width (inches)	Total Length (inches)	Pcs/Pk
655053000	A	GROUND ROD DRIVER	7/8	10 1/4	1
623361420	B	COLD CHISEL	1	12	1
630381420	C	COLD CHISEL	1	18	1
623364420	D	SLOTING CHISEL	1 1/8	12	1
623363420	E	SCALING CHISEL	2	12	1
623360420	F	BULL PT CHISEL	---	12	1
630380420	G	BULL PT CHISEL	---	18	1

### Floor Scraper for SDS-Max Rotary Hammers



Order No.		Description	Width (inches)	Total Length (inches)	Pcs/Pk
655020000	A	FLOOR SCRAPER HEAD	6	8	1
655022000	B	SDS-MAX SHANK	---	15	1
655023000	C	REPLACEMENT BLADE WITH HARDWARE	---	---	1







06



## Woodworking Tools and Heat Guns

- Engineered, designed and manufactured in Germany
- Unique designs and features
- High performance
- Saves you time and money



**SXE 450 TurboTec**  
6" Dual Random Orbit Sander

Model	SXE 450 TurboTec 600129420
Variospeed (V) electronics	•
Power control system	•
Turbo boost	•
Dual orbit setting	•
Integral dust collection	•
Auto-stop brushes	•
Double insulated	•
Sanding pad size	6" round (6 hole)
Sheet size	6" round
Orbits per minute	8,400 - 22,000
Orbit size	1/8" or 1/4"
Amps	3.4
Rated input watts	350
Carrying case	623894000 (optional)
<b>Standard equipment:</b>	Dust bag (344101410) Medium hard hook & loop pad Backing pad (630262000) Hexagon key (344161520)
Dual Orbit Settings:	• 1/8" orbit for fine finishing • 1/4" orbit for fast stock removal



**SXE 400**  
Compact Orbital Disc Sander

Model	SXE 400 600405420
Variospeed (V) electronics	•
Power Control System	•
Auto-stop brushes	•
Double insulated	•
Sanding pad size	3 1/8" round (6 hole)
Sheet size	3 1/8" round
Orbits per minute	5,000 - 10,000
Orbit size	1/8"
Amps	2
Rated input watts	220
Carrying case	623898000 (optional)
<b>Standard equipment:</b>	Hexagon key (344161530) Hook & loop backing pad (624064000) Intermediate disc (624061000)
<b>Optional equipment:</b>	Vacuum hose adaptor (624996000)



**Turbo Boost**  
for fastest removal of stock!





ORBITAL SANDER ACCESSORIES

For SXE 400 **Order #**

 **Hook & loop-faced intermediate disc** 624061000


 **"Cling-fit" Replacement Backing pad** 624064000

 **"Cling-fit" lambs wool polishing disc** 624063000

 **"Cling-fit" sanding discs. Ready-punched, Aluminum Oxide**

Packs of 10  
 P 40 grit 624041000  
 P 60 grit 624042000  
 P 80 grit 624043000  
 P 100 grit 624044000  
 P 120 grit 624045000  
 P 180 grit 624046000  
 P 240 grit 624047000  
 P 320 grit 624048000


Packs of 25  
 P 40 grit 624051000  
 P 60 grit 624052000  
 P 80 grit 624053000  
 P 100 grit 624054000  
 P 120 grit 624055000  
 P 180 grit 624056000  
 P 240 grit 624057000  
 P 320 grit 624058000  
 P 400 grit 624059000


 **Accessory Assortment** 624060000  
 Package includes:  
 10 Pieces- P 60  
 10 Pieces- P 80  
 5 Pieces- P 120


 **Adaptor** 624996000  
 Vacuum Adapter 35mm for SXE400



For SXE 450 **Order #**


 **Backing Pads**  
 6" medium hard (6 hole) 631158000  
 6" soft (6 hole) 631156000  
 PSA Pad-6" (6 hole) 631169000

 **"Cling-fit" intermediate disc (not perforated)**  
 soft, well suited for sanding rounded surfaces  
 6" 624037000

 **6" "Cling-fit" sanding discs**  
 (packs of 5)  
 Grit 6" (6 hole)  
 A40 624001000  
 A60 624002000  
 A80 624003000  
 A100 624004000  
 A120 624005000  
 A180 624006000  
 A240 624007000  
 A320 624008000


(packs of 25)  
 Grit 6" (6 hole)  
 A40 624019000  
 A60 624020000  
 A80 624021000  
 A100 624022000  
 A120 624023000  
 A180 624024000  
 A240 624025000  
 A320 624026000  
 A400 624027000


**6" Sanding Assortment** 624066000  
 Package includes:  
 10 Pieces- P 60  
 10 Pieces- P 80  
 5 Pieces- P 120


 **"Cling-fit" polishing sponge**  
 6" 631233000


 **"Cling-fit" lambs-wool polishing disc**  
 6" 631217000

**Order #**


 **Hook & Loop Backing Pad (for FSX200)** 625658000

 **Hook & Loop Backing Pads**  
 5" medium hard (8 hole) 631219000  
 5" soft (8 hole) 631220000  
**(for SXE425)**


 **"Cling-fit" Intermediate Disc (not perforated)**  
 soft, well suited for sanding rounded surfaces  
 5" 631216000


 **"Cling-fit" Sanding Discs**  
 (packs of 5)  
 Grit 5" (8 hole)  
 A40 631226000  
 A60 631227000  
 A80 631228000  
 A120 631229000  
 A180 631230000


(packs of 25) 5" (8 hole)  
 A40 631584000  
 A60 631585000  
 A80 631586000  
 A120 631587000  
 A180 631588000  
 A240 631589000  
 A320 631596000  
 A400 631597000


 **"Cling-fit" polishing sponge**  
 5" 631222000

 **"Cling-fit" lambs-wool Polishing Disc**  
 5" 631223000

 **Spare Paper Dust Bags (5 per pack) (for Sr356, Sr358, SXE425 SXE450 Duo)** 631288000

 **Canvas Dust Bag (for Sr356, Sr358, SXE425 SXE450 Duo)** 631235000


 **Vacuum Hose** 631751000  
 6' x 1 1/2" diameter and 2 1/4" vacuum connection. Tapered end fits directly into tool's extraction port.

 **Vacuum Hose** 631362000  
 11.5' x 1 1/2" diameter and 2 1/4" vacuum connection. Tapered end fits directly into tool's extraction port.

For SXE 450

**"Professional Series" for working with metal and wood**

**6" "Cling-fit" sanding discs. Ready-punched, for Wood and Metal**


 Packs of 50  
 P 40 grit 626674000  
 P 60 grit 626675000  
 P 80 grit 626676000  
 P 100 grit 626677000  
 P 120 grit 626678000  
 P 180 grit 626679000  
 P 240 grit 626680000  
 P 320 grit 626681000  
 P 400 grit 626682000

**6" Backing Pad** 630262000

**"Professional Series" for working with paints and varnishes**

**6" "Cling-fit" sanding discs. Ready-punched, for paints and varnishes**

 Packs of 50  
 P 40 grit 626683000  
 P 60 grit 626684000  
 P 80 grit 626685000  
 P 100 grit 626686000  
 P 120 grit 626687000  
 P 180 grit 626688000  
 P 240 grit 626689000  
 P 320 grit 626690000  
 P 400 grit 626691000

 **6" "Cling-fit" intermediate disc**  
 well suited for sanding rounded surfaces 630260000

# JIG SAW/PAINT REMOVER AND ACCESSORIES




**STEB 140**  
Variable Speed Jig Saw  
with Orbit

Model	STEB 140 601402420
Electronics	Vario-tacho-constamatic (VTC)
Aluminum die-cast gear housing	•
Variable speed controlled by adjusting dial	•
Electronic speed stabilizer	•
Orbital saw-blade movement for fast cutting	3-stage
Grooved needle-bearing roller-guide prevents the blade from wandering, allowing for truer cuts. Suitable for bevel cuts. Rapid setting of the sole plate for bevel angles of 22.5° & 45° left or right	•
Uses T-shank style blades	•
Sawdust is blown from line of cut for better visibility	•
Auto-stop carbon brushes	•
Quick blade change system with auto eject	•
Maximum torque	62 inch lbs.
Maximum thickness of material	
- wood	5 1/2"
- non-ferrous metal	1 3/8"
- sheet steel	3/8"
Rated input watts/amps	720/7.0
No-load speed (SPM)	1,000-3,100
Length of stroke	1"
Orbital settings	3 position
Carrying case	344454150 (optional)
<b>Standard equipment:</b>	Allen wrench (344161530)
<b>Optional equipment:</b>	Anti-splintering sole plate insert (631208000)
	Circle Guide (631340000)




**LF 724 S**  
Paint Remover

Model	LF 724 S 600724420
Double insulation	•
Environmentally friendly method of paint and varnish removal	•
Highly suitable for handling rabbets	•
Continuous adjustment of chip removal: 0-.012"	•
Reversible all-carbide blades with long service life	•
Low vibration reduces fatigue	•
Minimal dust creation	•
Encased aluminum die-cast gear housing	•
High-performance palloid gear system	•
Maximum torque	18 inch lbs.
Blade cutting circle diameter	3 1/8"
Maximum rabbet height	1 1/10"
Axial cutting depth	0-.012" (0-.3mm)
Radial cutting depth	.006"
Rated input watts/amps	710/6.0
No-load speed (RPM)	10,000
Carrying case	623860000 (standard)
<b>Standard equipment:</b>	4 indexable solid tungsten carbide blades - 4 cutting edges per blade
	Vacuum adaptor (343371390)
	Combination wrench(344162450)
	Cleaning pick (344162540)

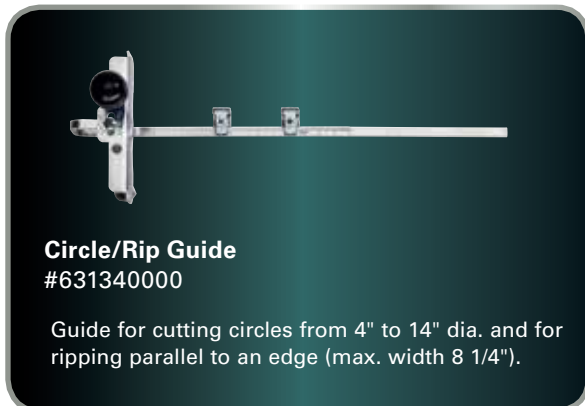

**Circle/Rip Guide**  
#631340000

Guide for cutting circles from 4" to 14" dia. and for ripping parallel to an edge (max. width 8 1/4").

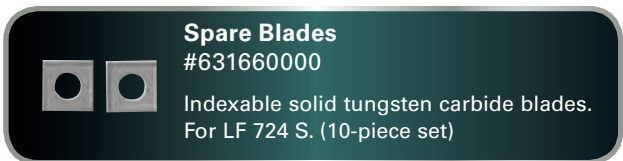

**Spare Blades**  
#631660000

Indexable solid tungsten carbide blades. For LF 724 S. (10-piece set)



Back View of Heat Gun



**H 16-500**  
2-Stage Variable Temperature Heat Gun



Back View of Heat Gun



**HE 20-600**  
Electronic 3-Stage Variable Temperature Heat Gun



Back View of Heat Gun



**HE 23-650**  
Digital Programmable 2-Stage Variable Temperature Heat Gun



**NEW**

**STANDARD EQUIPMENT FOR HG 18 LTX 500**

**630004000**  
Wrap around nozzle



**630005000**  
Reducing nozzle



**HG 18 LTX 500**  
18V Cordless Dual Temperature Heat Gun

Model	H 16-500 601650420	HE 20-600 602060420	HE 23-650 602365420	Model Bare Tool:	HG 18 LTX 500 610502850
Double insulation	•	•	•	LED Light	•
Variospeed (V) electronics	•	•	•	Temperature regulation via thumb wheel	•
Digital programmable temperature w/LED display			•	Batteries	Compatible with Metabo Lilon or LiHD batteries
Temperature regulation via thumb wheel	•	•		Runtime (8.0 Ah Battery)	20+ minutes
Non-slip pads for stationary use	•	•	•	Temperature range	570 °F - 930 °F
One handed temp adjustment	•	•	•	Time to temperature	5 sec (572 °F)
Thermal fuse for safety	•	•	•	Air Flow/Volume	6-7 CFM
Rated input watts	1,400	1,500	1,600	Carrying case (optional)	
Rated Amps	11.7	12.5	13.0	Tool weight (lbs) without batteries	1.1 lbs.
Air Flow	8.5/15.9 CFPM	5.3/10.6/17.7 CFPM	5.3-8.8/5.3-17.7 CFPM	<b>Standard Equipment:</b>	
Air Temperature	572/932 °F	122/122-1100 °F	122/122-1200 °F	Wrap around nozzle	630004000
Carrying case (optional)	623854000	623854000	623854000	Reducing nozzle	630005000

## HEAT GUN ACCESSORIES



**630001000**  
**Wide jet nozzle- 2"**  
Drying, stripping old coats of paint



**630002000**  
**Wide jet nozzle- 3"**  
Stripping old coats of paint from large surfaces



**630003000**  
**Deflector Nozzle**  
Stripping old coats of paint from window frames, waxing and de-waxing skis



**630004000**  
**Air-wrap Nozzle**  
Heating plastic tubes prior to bending them; shrinking of shrink-fit plastic sleeves



**630005000**  
**Reducing Nozzle- 9mm dia.**  
Spot Heating (not for H16-500)

# CARRYING CASES

Updates to come - Fall 2020



344453630  
344453760



344454090  
344454110  
344454120  
344454140  
344454180  
623854000  
344455600



657006000



657007000



656304000



623874000

Item No.	Material	L x H x D	Use
656304000	Steel	13 3/4 x 10 x 5 1/8	4 1/2" / 5" / 6" Small Angle Grinders / drills / hammer drills
344454090	Plastic	15 1/4 x 12 1/2 x 4 1/2	Cordless tools LT/LTX / SSD / SSW
344454110	Plastic	15 1/4 x 12 1/2 x 4 1/2	Drills and hammer drills w/ aluminum gear housings
344454120	Plastic	15 1/4 x 12 1/2 x 4 1/2	KHE-D24 / KHE-D28 / ASE18
344454140	Plastic	15 1/4 x 12 1/2 x 4 1/2	LF724
344454180	Plastic	15 1/4 x 12 1/2 x 4 1/2	4-1/2" and 5" Angle grinders
344455600	Plastic	15 1/4 x 12 1/2 x 4 1/2	6" Angle grinders
623854000	Plastic	19 1/2 x 12 1/2 x 5 1/4	Multipurpose - foam inlay for customizing
657006000	Canvas	18 x 10 x 18	Fits 2 tools plus accessories
344453630	Plastic	24 x 16 x 6 1/2	KHE56
344453760	Plastic	24 x 16 x 8	KHE76
657007000	Canvas	25 x 11 x 13	Fits 4 tools plus accessories
623874000	Steel	26 1/2 x 6 1/2 x 11	Intermediate and large angle grinders

## Futuro Top Keyless Chucks



For hammer drills

For Hammering

Capacity	Internal Thread	Weight ozs.	Order No.
1/16"-3/8"	1/2" - 20 UNF	12	636216000
0"-1/2"	1/2" - 20 UNF	16	636226000

Individually packaged in cardboard boxes.

## Futuro Plus Double Sleeve Reversible Keyless Chucks



For corded and cordless drills

- **Mechanism** provides higher gripping power and longer life.
- **Large protective steel cap** protects chuck against dirt and damage.

For Rotation Only

Capacity	Internal Thread	All Metal	Weight ozs.	Order No.
1/32"-3/8"	1/2" - 20 NF		7	636519000

For LTX Class Hammers and Drills

1/16"-1/2"	Quick-change	•	7	627240000
------------	--------------	---	---	-----------

For Hammering

1/16"-1/2"	1/2" - 20 UNF	•	10.5	636619000*
1/16"-1/2"	1/2" - 20 UNF	•	10.5	636620000

\*With carbide jaws  
Individually packaged in cardboard boxes.

## Futuro Plus Single-Sleeve Reversible Keyless Chucks



For drills with spindle locking mechanism only

- **Specially developed mechanism** allows changing bits rapidly with one hand.
- **High gripping power**, accurate concentricity and long service life.

For Rotation Only

Capacity	Internal Thread	All Metal	Weight ozs.	Order No.
----------	-----------------	-----------	-------------	-----------

For Hammering

1/16"-1/2"	1/2" - 20 NF	•	11	636621000
------------	--------------	---	----	-----------

Individually packaged in cardboard boxes.

## Quick Tapping Chucks



Capacity	Order No.
M4-M6 (1/4")	627235000
M8-M12 (1/2")	627237000

Individually packaged.

## Taper Arbors



Machine Side Morse taper	Chuck Side Taper arbor	Order No.
No. 2	B12	635114000
No. 2	B16	635115000

Individually packaged.

## Keyless Drill Chucks



For non-reversing portable and stationary drills

- All parts are **hardened and ground** for long life and smooth operation.
- Jaws are **self tightening** – no scored drill shanks and less drill breakage.
- No key to lose.

Capacity	Internal Thread or Taper Socket	Weight ozs.	Order No.
3/64"-3/8"	3/8" - 24 NF	12	636321000
3/64"-3/8"	1/2" - 20 NF	12	636322000
3/64"-3/8"	B16	21	636333000
3/64"-1/2"	1/2" - 20 NF	29	636351000
3/64"-1/2"	J6	29	636356000
1/8"-5/8"	5/8" - 16 UN	35	636361000
1/8"-5/8"	B16	35	636362000
1/8"-5/8"	J6	35	636364000

Individually packaged in cardboard boxes.

## Quick Keyless Chuck



Capacity	Order No.
----------	-----------

For BS 18 LTX BL Quick and SB 18 LTX BL Quick

1/2"	1/2" - 20 UNF	10.5	627240000
------	---------------	------	-----------

For BS 12 BL Quick and BS 18 Quick (NEW)

3/8"			627259000
------	--	--	-----------

For BS 18 L Quick (NEW)

1/2"			636608000
------	--	--	-----------

For Any Quick 12V/18V Drill (NEW)

1/2" Carbide Quick Chuck			627203000
--------------------------	--	--	-----------



Individually packaged in cardboard boxes.

## Keyed Drill Chucks



For corded and cordless drills

- All wearing parts are made of **case hardened steel** for longest life.
- **Higher gripping power**, positive chucking and close tolerance concentricity.
- Supplied complete with chuck key.

For Power Tools

Capacity	Internal Thread	Weight ozs.	Order No.	Supplied with chuck / key
1/64"-3/8"	1/2" - 20 NF Rev.	8	635252000	•
3/32"-1/2"	1/2" - 20 NF Rev.	11	635250000	•

Individually packaged in cardboard boxes.

For Drill Presses

Capacity	Internal Thread or Taper Socket	Weight ozs.	Order No.
1/16"-1/2"	3/8" - 24 NF	11	635033000
1/16"-1/2"	1/2" - 20 NF	11	635035000
1/16"-1/2"	B16	12	635036000
1/8"-5/8"	1/2" - 20 NF	21	635054000
1/8"-5/8"	1/2" - 20 UN	21	635056000

Individually packaged in cardboard boxes.

## Replacement Chuck Keys & Screw

For Metabo drill chucks	Order No.
3/8" and 1/2" capacity (chuck keys)	635167000
5/8" capacity (chuck keys)	635168000
Chuck retention screw	341701940

Individually packaged.



Sending your tool for repair has never been so easy! Select your tool down the list, process your order, use the supplied shipping label to expedite your tool to us. We will take care of the rest! Your tool will be sent back to you in no time. In addition to fixing the reported problem, we will proceed to a full repair and maintenance of your tool. This service offers you the following benefits:



LEARN MORE!

- Serviced at Metabo North American headquarters in West Chester, Pennsylvania
- Repairs will be completed in 5 days or less (Upon Receipt)
- Free FedEx shipping to and from Metabo Factory service facility
- Package your Metabo Tool and drop off at one of nearly 8,000 authorized FedEx shipping locations nationwide
- Best for individual or smaller tool quantities
- Metabo Factory Service Technicians will repair your tool with genuine Metabo parts
- Metabo NA will ship your tool directly to you – No need to pick it up

For more information, terms and policies, see [metabousafactoryservice.com](http://metabousafactoryservice.com) or if you have any questions call 1-800-638-2264. Terms are subject to change.




## Metabo Warranty Information

### OSHA U.S. Department of Labor Occupational Safety and Health Act

Metabo Power Tools are manufactured in compliance with all applicable standards and their latest amendments. Specifically, 1910 allowance for industrial use, and 1926 allowance for construction use.

### Listed Tools

Metabo Power Tools bearing the symbol of Underwriters' Laboratories, Inc. or Canadian Standards Association are listed by the testing laboratories as having complied with their standards for safety.



For more information concerning the conformance of our tools, please contact Metabo Technical Services at [svcsupport@metabousa.com](mailto:svcsupport@metabousa.com), or by calling 800-638-2264.

### Recommended Extension Cords

Metabo Power Tools operate efficiently within 110-120 volts. Improper cord sizing will cause a drop in voltage, resulting in loss of power, overheating, and possible damage to the tool. Determine the rated amp listing of your tool from the specification label on the tool, then use the chart below to determine the proper gauge and length of cord to use.

Amp Rating	Cord Length (ft.)								
	25	50	100	150	200	250	300	400	500
0-2	18	18	18	16	16	14	14	12	12
2-3	18	18	16	14	14	12	12	10	10
3-4	18	16	14	14	12	12	10	10	
4-5	18	16	14	12	10	10	10		
5-6	18	16	12	12	10	10			
6-8	16	14	12	10	10				
8-10	16	14	12	10					
10-12	16	14	10						
12-15	12	12	10						
15-20	10	10	10						

### Trade Associations

Metabo is associated with the following trade associations:



### Metabo Power Tools: Service and Warranty Program

All Metabo power tools have been carefully tested and inspected before shipment and are warranted to the original purchaser to be free from defects in workmanship and materials for a period of 3-years (36 months) from original user's date of purchase. This limited warranty does not apply to accessories or damage that Metabo determines to be from misuse, alterations, abuse, normal wear and tear, lack of maintenance, accidents, or repairs made by or attempted by anyone other than Metabo authorized personnel. Valid proof of purchase such as a sales receipt is required to qualify for warranty programs.

### 30 Day Performance Guarantee

If in the first 30 days from purchase, a tool fails to perform to Metabo's performance specifications as a result of factory defect, return the tool to the original point of purchase. After verification of a factory defect by an Authorized Metabo Repair Facility is performed, Metabo will replace the tool free of charge.

### 3-Year Limited Warranty

After the first 30 days from purchase, Metabo will replace or repair a power tool which upon inspection by an authorized Metabo Repair Facility is determined to be defective in either workmanship or materials for a period of three 3-years (36 months) from original date of purchase. If a tool fails to perform to Metabo's factory specifications, the tool may be sent along with proof of purchase to Metabo's Corporate Service Center or one of our regionally located Authorized Service Centers. Please visit [www.metabo.com](http://www.metabo.com) for complete listing.

### Metabo MAX Repair Program

To help maintain the performance of your Metabo power tools and to reduce possible downtime, Metabo publishes a maximum repair cost for select current models. The MMR program guarantees that you will not pay more than the published "MAX Repair" rate for that tool (the fee could be less if the repair is minor). The MMR program is independent of the Metabo warranty and applies to current model tools that are sent to Metabo's Corporate Service Center\*. MMR services include:

- Tear down inspection
- Cleaning and lubrication
- Replacement of any worn and/or damaged parts with genuine Metabo replacement parts
- Full performance and safety tests

For additional details and tool listing please contact Metabo at 800-638-2264.

\*Metabo Corp. Repair Center  
1231 Wilson Drive  
West Chester, PA 19380





# metabo® club

PROS DESERVE PROFESSIONAL POWER TOOLS

## JOIN THE CONVERSATION!



*The Metabo Club is a community of skilled, professional tradespeople that take pride in their craft, with a deep concern for quality, performance, productivity and safety (their own and others). The Metabo Club is a forum to exchange ideas with similar-minded pros to improve their skills and get the job done. It is a place of knowledge sharing, passion and pride.*

[metabo.com/club](http://metabo.com/club)

### Metabo Corporation

1231 Wilson Drive  
West Chester, PA 19380  
Phone: 610-436-5900 or 800-638-2264  
Fax: 800-638-2261  
info@metabousa.com  
www.metabo.com

### Metabo Canada Inc.

5045 Orbitor Drive  
Mississauga, ON L4W 4Y4, Canada  
Phone: 905-624-5897 or 877-638-2261  
Fax: 877-638-2269  
info@metabo.ca  
www.metabo.ca



# metabo®

PROFESSIONAL POWER TOOL SOLUTIONS